

Technical Databook **2017 • 2018**

Car › 4 x 4 › Van



This data book contains comprehensive information on our car, 4x4, LT (light truck) and van tyres.

The instructions and data given in this data book are valid for all tyre brands of Continental AG, if not otherwise specified.

Instructions and data exclusively valid for the tyre brand Continental are specially marked or displayed on separate pages.

Tyre safety tips

The technical data and other details on tyres and accessories have been compiled to reflect as exactly and completely as possible the current state of development and are based on **ETRTO**¹⁾, **ISO**²⁾, **WdK** and **DIN**³⁾ standards.

Most of the tyres of Continental AG comply with **DOT**⁴⁾ regulations and are marked accordingly.

They are homologated in accordance with the relevant **UN / ECE**⁵⁾ regulation (ZR tyres without service description in accordance with EU guideline 92/23).

This databook is intended for information and instruction only. No liability whatsoever will be accepted for damage, regardless of its nature and its legal basis, arising from advice given in this book.

We recommend that the **inflation pressure** of every tyre is **checked** and adjusted at least **every 14 days**. This does also apply for vehicles equipped with a tyre pressure monitoring system (TPMS). Avoid driving over sharp-edged or pointed objects.

Lower inflation pressures, greater loads or higher speeds than specified by the vehicle and / or tyre manufacturer all shorten the **service life** of tyres and can result in structural damages.

We recommended that **new tyres** are **run in** at moderate speeds for the first 125 to 190 miles (200 to 300 km) to roughen the tread surface. The tyre does not achieve its best performance until after this running-in period.

We recommend all wheel positions are fitted with tyres of the **same tread pattern**.

It is especially important that Continental SSR runflat tyres*) not be mixed with standard tyres.

Please observe the detailed operating instructions on [page 105ff.](#)

¹⁾ ETRTO - The European Tyre and Rim Technical Organisation, Brussels

²⁾ ISO - International Organization for Standardization

³⁾ DIN - German Institute for Standardisation, Berlin
WdK - German Rubber Manufacturers' Association, Frankfurt / M.

⁴⁾ DOT - Department of Transportation (USA)

⁵⁾ ECE - Economic Commission for Europe (UNO-Institution, Geneva)

*) only available for tyre brand Continental
See [page 23](#) for further details



SAFETY WARNING!

The instructions given in this databook must be observed to ensure vehicle safety at all times.

This applies especially with respect to tyre inflation pressure recommendations.

Non-compliance with these instructions means risking tyre damage which, if serious enough, may result in a tyre bursting. It is hazards like these that can cause traffic accidents involving vehicle damage and / or serious personal injury.

The content of this publication is provided for information only and without responsibility. Continental AG makes no representations about the accuracy, reliability, completeness or timeliness of the information in this publication. Continental AG may, in its sole discretion, revise the information contained herein at any time without notice.

Continental AG's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of these agreements. This publication does not contain any guarantee or agreed quality of Continental AG's products or any warranty of merchantability, fitness for a particular purpose and non-infringement. Continental AG may make changes in the products or services described at any time without notice.

This publication is provided on an "as is" basis. To the extent permitted by law, Continental AG makes no warranty, express or implied, and assumes no liability in connection with the use of the information contained in this publication. Continental AG is not liable for any direct, indirect, incidental, consequential or punitive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world.

The trademarks, service marks and logos (the Trademarks) displayed in this publication are the property of Continental and / or its affiliates. Nothing in this publication should be construed as granting any license or right to the Trademarks. Without the express written consent of Continental AG the use of the Trademarks is prohibited.

All text, images, graphics and other materials in this publication are subject to the copyright and other intellectual property rights of Continental AG and / or its affiliates. Continental AG owns the copyrights in the selection, coordination and arrangement of the materials in this publication. These materials may not be modified or copied for commercial use or distribution.

Copyright © 2017 Continental AG
All rights reserved.

TD C 06/2017

0130 1627

Introduction, Safety hints	2
Publisher's imprint	4
Tyre Sidewall Information	6
Service description (including Load Index and Speed Symbol)	8
Units of measurement and definitions of the technical data	9

Passenger car tyres

Continental brand tread patterns and recommended applications	
- Passenger / SUV summer tyres	10
- Passenger / SUV winter tyres	17
- SSR runflat tyres	23
- ContiSeal™ tyres	24
- ContiSilent™ technology	25
Technical data of all tyre brands of Continental	
- Passenger / SUV, 4 x 4	26
- LT 4 x 4	64
Special spare tyres	68
Conti Sealant kits and replacement	72

Van tyres


Continental brand tread patterns and recommended applications	74
Technical data of all tyre brands of Continental	80

Tyres for caravans and car drawn trailers (special load capacities)	92
Car rims	101

Operating instructions

Correct choice of tyre and wheel	105
Winter tyres	105
Tread rubber brittleness influenced by temperature	106
Fitting the tyre	106
Fitting the wheel to the vehicle	108
Tyre pressure	108
Load capacity and speed	113
Tyre damage	115
Tyre Rotation on a vehicle	115
Tyre storage	117
Tyre repair	119
Tyre service life for passenger car and light truck	121
Minimum tread depth	122
Guidelines on tyre safety	123

Index	124
Service	126

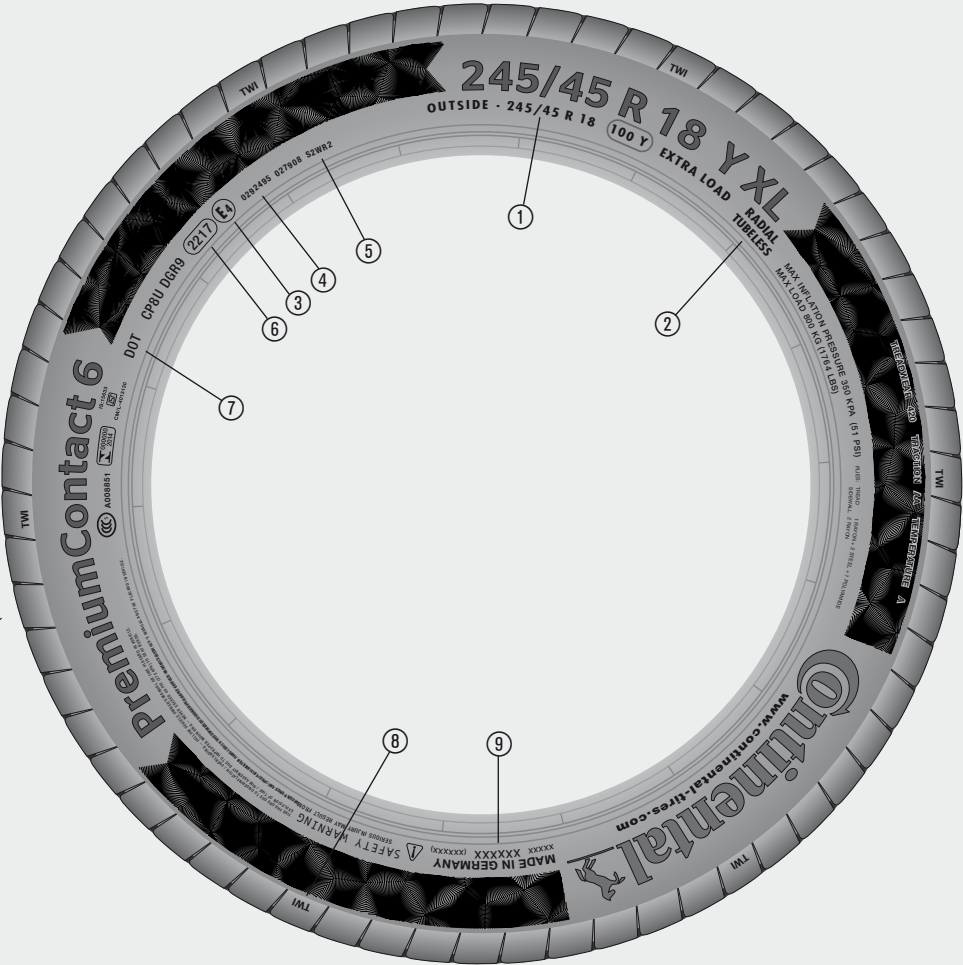

Example data for PremiumContact 6 (tyre brand Continental).
The specifications on a tyre sidewall are standardised and apply for other tyre brands accordingly.

- | | |
|--|--|
| <p>① 245/45 R 18 100 Y XL</p> | <p>245 Nominal section width in mm.</p> <p>45 Nominal aspect ratio
 (Tyre height is 45 % of tyre width).</p> <p>R Symbol for radial tyre
 (or RF for run flat tyres).</p> <p>18 Rim diameter code.</p> <p>100 Load Index "100" = max. load of this tyre
 is 800 kg (see table page 8).</p> <p>Y Speed Symbol, indicating max. speed:
 V=300 km/h / 187 mph (see table page 8).</p> <p>Other information may be added after the size marking:</p> <p>"REINFORCED" or "EXTRA LOAD (XL)"
 for reinforced tyres, "M+S" for winter tyres.</p> |
| <p>② TUBELESS</p> | <p>tubeless.
 (TUBE TYPE tyres must be mounted with tubes).</p> |
| <p>③ E 4</p> | <p>Marking indicating accordance with UN / ECE regulations. The number
 after the E in the circle indicates the country of homologation.
 (E⁴) (4=Netherlands).</p> |
| <p>④ 0255657</p> | <p>Approval number acc. to relevant UN / ECE regulation.</p> |
| <p>⑤ S2WR2</p> | <p>The string "S2WR2" indicates compliance with maximum permissible sound
 value S2, max. wet grip value and max. value of rolling resistance R2.</p> |
| <p>⑥ 2217</p> | <p>Production code ("22" means 22nd week
 "17" means 2017).</p> |
| <p>⑦ DOT</p> | <p>DOT = Department of Transportation, USA.</p> |
| <p>⑧ TWI</p> | <p>TWI = Tread Wear Indicator.
 Cross ribs evenly spaced around the circumference
 of the tyre in the longitudinal tread grooves and becoming
 level with the tread surface when the remaining tread
 depth is down to 1.6 mm.</p> |
| <p>⑨ Made in ...</p> | <p>Marking showing the country of origin.</p> |

Other possible markings on the sidewall

M + S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure
 is primarily designed to perform better in snow conditions than a normal
 tyre with regard to its ability to initiate or maintain vehicle motion.



The Alpine symbol identifies winter tyres according to UNECE regulations
 (valid in the EU and various other countries) and the tyre regulations of the
 USA and Canada. The snow performance of these winter tyres has to be
 proven by objective tests and meet or exceed defined limits. These tyres
 provide high performance with regards to safety and control on snow, on
 icy roads and in general at low temperatures.

Including Load Index and Speed Index

Load Index (LI)

The Load Index is a numerical code associated with the maximum load a tyre can carry (see also [page 109](#)).

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
50	190	65	290	80	450	95	690	110	1060
51	195	66	300	81	462	96	710	111	1090
52	200	67	307	82	475	97	730	112	1120
53	206	68	315	83	487	98	750	113	1150
54	212	69	325	84	500	99	775	114	1180
55	218	70	335	85	515	100	800	115	1215
56	224	71	345	86	530	101	825	116	1250
57	230	72	355	87	545	102	850	117	1285
58	236	73	365	88	560	103	875	118	1320
59	243	74	375	89	580	104	900	119	1360
60	250	75	387	90	600	105	925	120	1400
61	257	76	400	91	615	106	950	121	1450
62	265	77	412	92	630	107	975	122	1500
63	272	78	425	93	650	108	1000	123	1550
64	280	79	437	94	670	109	1030	124	1600

Speed Symbol (SSY)

The Speed Symbol indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index.

SI	Max. speed for passenger car tyres		SI	Reference speed for commercial vehicle tyres	
M	81 mph ¹⁾	130 km/h ¹⁾	K	69 mph	110 km/h
P	93 mph	150 km/h	L	75 mph	120 km/h
Q	100 mph	160 km/h	M	81 mph	130 km/h
R	106 mph	170 km/h	N	87 mph	140 km/h
S	112 mph	180 km/h	P	93 mph	150 km/h
T	118 mph	190 km/h	Q	100 mph	160 km/h
H	130 mph	210 km/h	R	106 mph	170 km/h
V	150 mph	240 km/h	S	112 mph	180 km/h
W	169 mph	270 km/h	T	118 mph	190 km/h
Y	187 mph	300 km/h	H	130 mph	210 km/h
(...Y)	over 187 mph ²⁾	over 300 km/h ²⁾			
(ZR*)	over 150 mph	over 240 km/h)			

¹⁾ As a rule only used for special spare tyres if they qualify according to UN / ECE Regulation 30. In accordance with UN / ECE Regulation 64 governing the use of special spare tyres, even higher speed rated tyres may only be used up to a maximum speed of 50 mph (80 km/h).

²⁾ See [page 108](#), table 4 for details.

* Obsolete designation, production until Nov., 2014.

The technical data in the tables comply generally with international standards.

All **dimensions** in the tables of this databook are given in millimetres (mm), if not indicated in a different way.

The **rim diameter** is given in inch code. Tyre ranges on new rim types may also be marked in mm.

Construction measurements are theoretical values for the design of the tyre: The width is relative to the smooth sidewall, the outer diameter to the tread centre.

Maximum measurements are actual **operating measurements** of the inflated tyre (operating pressure) in the unloaded state. They include growth but exclude dynamic distortions.

The **width** is the max. permitted tyre width, including sidewall decorative markings, when the tyre is mounted on the correct rim.

The **outer diameter** is the max. permitted diameter. The max. measurements are binding for **vehicle designers**.

The **static radius** is the distance between the wheel centre and the ground contact patch under max. load at the recommended tyre pressure.

The **rolling circumference** is the distance covered by a point on the circumference when the tyre revolves once at 60 km/h (37 mph).




The **load capacity** is indicated in kilograms (kg).

Tyre pressure (inflation pressure) is given in bar as an overpressure (cold tyre), for driving speeds to **160 km/h (100 mph)**.

Vehicle designers should bear in mind the **maximum values** for tyre outer diameter and width when planning the **wheel space of a vehicle**, if all standard approved tyres are to fit without any restrictions.

Standard sizes

Flotation sizes (4x4)

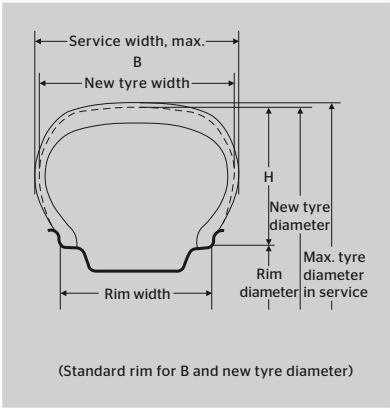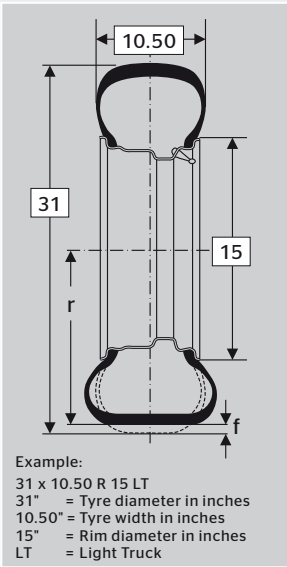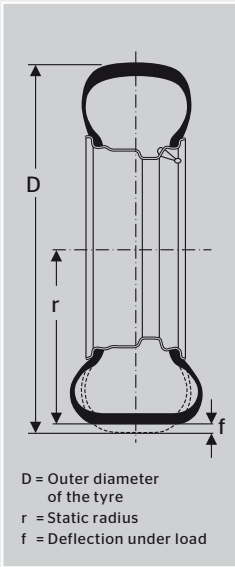


Passenger- and SUV Summer tyres

SportContact™ 6

For sporty vehicles and SUVs

- › Black Chili for maximum grip in all directions enables a supreme driving experience
- › Force Vectoring for maximum control – a new era in tread pattern development
- › Aralon350™: the new Adaptive Hybrid Cap Ply for maximum stability at high speeds of up to 350 km/h
- › Asymmetrical non-directional tread pattern



Test winner
Issue
04/2016
255/35 R 20
295/30 R 20

Tyre dimensions^{*)}

Tyre width in mm **225-335**

Rim size in inches **18-23**

Speed Symbol **Y**

Tyre cross-section **series 25-50**

Also available as SSR runflat tyre and with noise reducing ContiSilent™ technology.
See [page 23 / 25](#) for further details.

ContiSportContact™ 5 P

For sporty vehicles and SUVs

- › Perfect steering precision and sporty handling
- › Outstanding grip and stability during cornering
- › Optimised to meet the specific requirements of front and rear axle positions
- › Short braking distances on both wet and dry roads
- › Asymmetrical non-directional tread pattern



Recommended
Issue
04/2015
235/35 ZR 19 Y

Tyre dimensions^{*)}

Tyre width in mm **225-335**

Rim size in inches **18-22**

Speed Symbol **Y**

Tyre cross-section **series 30-45**

Also available as SSR runflat tyre and with noise reducing ContiSilent™ technology.
See [page 23 / 25](#) for further details.

ContiSportContact™ 5

For high-performance and luxury vehicles and SUVs

- › Excellent road grip and safety when cornering
- › Shorter braking distances in all weather conditions
- › Reduced fuel consumption and high mileage
- › Asymmetrical non-directional tread pattern



Test winner
Issue
07/2015
225/50 R 17 W

Tyre dimensions^{*)}

Tyre width in mm **195-315**

Rim size in inches **17-22**

Speed Symbol **H-Y**

Tyre cross-section **series 30-65**

Also available as SSR runflat tyre, ContiSeal™ tyre and with noise reducing ContiSilent™ technology. See [page 23 - 25](#) for further details.

New!

PremiumContact™ 6

For all vehicle and SUV classes

- › Maximum wet braking while improving mileage due to Safety Silica Compounds
- › Extended driving convenience upgraded by the comfort-optimised performance footprint
- › Sporty driving in every car thanks to handling-optimised pattern design
- › Asymmetrical non-directional tread pattern

Tyre dimensions^{*)}

Tyre width in mm **195-275**

Rim size in inches **16-21**

Speed Symbol **V-Y**

Tyre cross-section **series 40-65**

Also available as SSR runflat tyre and with noise reducing ContiSilent™ technology (in preparation).

Passenger- and SUV Summer tyres

ContiPremiumContact™ 5

For mid-sized vehicles and SUVs

- › Perfect grip and optimal handling in every driving situation
- › Short braking distances on dry and wet surfaces
- › Comfortable driving and improved rolling resistance
- › Asymmetrical non-directional tread pattern



Exemplary
Issue
12/2016
205/55 R 16 V

Tyre dimensions^{*)}

Tyre width in mm **165-235**

Rim size in inches **14-18**

Speed Symbol **H-Y**

Tyre cross-section **series 50-70**

Also available as ContiSeal™ tyre. See [page 24](#) for further details.



ContiEcoContact™ 5

For mid-sized vehicles and SUVs

- › Optimised rolling resistance for reduced fuel consumption
- › High braking safety and short braking distances on wet roads
- › Best handling on wet and dry roads
- › Asymmetrical non-directional tread pattern

Tyre dimensions^{*)}

Tyre width in mm **165-245**

Rim size in inches **13-20**

Speed Symbol **T-Y**

Tyre cross-section **series 45-70**

Also available as SSR runflat tyre and ContiSeal™ tyre. See [page 23 / 24](#) for further details.



SUV Onroad tyres

ContiCrossContact™ UHP

For sporty SUVs

- › Short braking distances and high cornering stability
- › Safety reserves for outstanding handling and fun at the wheel
- › Low rolling resistance and excellent grip
- › Asymmetrical non-directional tread pattern



Recommended
Issue
04/2015
215/65 R 16 H/V

Tyre dimensions^{*)}

Tyre width in mm **225-315**

Rim size in inches **16-23**

Speed Symbol **H-(Y)**

Tyre cross-section **series 30-65**

0% 100%



Offroad

Onroad

Also available as SSR runflat tyre and ContiSeal™ tyre. See [page 23 / 24](#) for further details.



Conti4x4SportContact™

For SUVs and offroad vehicles

- › Good cornering stability
- › Good protection against aquaplaning
- › Suitable for high-speed road use
- › Asymmetrical non-directional tread pattern

Tyre dimensions^{*)}

Tyre width in mm **275**

Rim size in inches **19-20**

Speed Symbol **Y**

Tyre cross-section **series 40-45**

0% 100%



Offroad

Onroad



SUV all-round tyres

ContiCrossContact™ LX 2

For SUVs and offroad vehicles

- › Excellent dry and wet braking performance and very good handling properties
- › High mileage and high level of driving comfort
- › Outstanding traction in light off-road use

M+S

Tyre dimensions^{*)}

Tyre width in mm **205-285**

Rim size in inches **15-20**

Speed Symbol **S-V**

Tyre cross-section **series 50-75**



ContiCrossContact™ LX

For SUVs and offroad vehicles

- › Excellent handling and braking performance for on-road and off-road use
- › Good protection against aquaplaning
- › Precise steering response and superb straight-line tracking
- › Asymmetrical non-directional tread pattern

M+S

Tyre dimensions^{*)}

Tyre width in mm **215-265**

Rim size in inches **16-18**

Speed Symbol **T-V**

Tyre cross-section **series 60-70**



SUV all-round tyres

ContiCrossContact™ LX Sport

For SUVs and offroad vehicles

- › Outstanding handling for on-road and general off-road use
- › Excellent braking performance on dry and wet roads
- › Optimised rolling resistance
- › Asymmetrical non-directional tread pattern

M+S

Tyre dimensions^{*)}

Tyre width in mm **215-315**

Rim size in inches **16-22**

Speed Symbol **T-Y**

Tyre cross-section **series 40-70**

10% 90%

Offroad

Onroad

Also available as SSR runflat tyre and with noise reducing Contisilent™ technology.
See [page 23 / 25](#) for further details.



Conti4x4Contact™

For SUVs and offroad vehicles

- › Excellent noise level and comfort in on-road use
- › Good protection against aquaplaning
- › Superb traction both on- and off-road

M+S

Tyre dimensions^{*)}

Tyre width in mm **195-275**

Rim size in inches **15-20**

Speed Symbol **S-V**

Tyre cross-section **series 45-80**

10% 90%

Offroad

Onroad



M+S 'Show tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

4x4 tyres

New!



CrossContact™ ATR

For SUVs, pickup trucks and off-road vehicles

- › Additional off-road traction and grip
- › Increased wet traction and braking on slippery roads
- › Improved overall durability
- › Substantial road noise reduction

M+S

Tyre dimensions^{*)}

Tyre width in mm **205-275**

Rim size in inches **15-20**

Speed Symbol **T-W**

Tyre cross-section **series 40-85**

30 %

70 %

Offroad

Onroad



ContiCrossContact™ AT

For off-road vehicles

- › Especially good directional stability and smooth running performance
- › Exceptional braking and traction performance on wet and dry road surfaces
- › Outstanding protection against aquaplaning

M+S

Tyre dimensions^{*)}

Tyre width in mm **205-265**

Rim size in inches **15-17**

Speed Symbol **Q-H**

Tyre cross-section **series 65-85**

50 %

50 %

Offroad

Onroad



Winter tyres

New!

WinterContact™ TS 860 S

Winter UHP tyre for premium sports cars

- › Excellent snow performance for outstanding driving pleasure.
- › Best braking performance for maximum winter safety.
- › Superb dry handling performance for the highest steering precision.
- › Exceptional low rolling resistance for reduced fuel consumption.
- › Asymmetrical non-directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **225-315**

Rim size in inches **18-21**

Speed Symbol **H / V / W**

Tyre cross-section **series 30-60**

Also available as SSR runflat tyre (in preparation).

WinterContact™ TS 860

For compact and mid-sized vehicles

- › Cool Chili™ ensures maximum braking performance in any wintry weather condition
- › Liquid Layer Drainage™ reduces the braking distance on frost-covered and icy roads
- › Snow Curve+ technology for safe cornering on snow-covered roads
- › Directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **155-225**

Rim size in inches **13-17**

Speed Symbol **T / H / V**

Tyre cross-section **series 40-80**



The Alpine symbol identifies winter tyres according to UNECE regulations (valid in the EU and various other countries) and the tyre regulations of the USA and Canada. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow, on icy roads and in general at low temperatures.

M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

Winter tyres

WinterContact™ TS 850 P



For mid-sized and luxury vehicles and SUVs

- › Enhanced snow traction given by S-GRIP
- › Improved handling on snow due to PrecisionPlus
- › Better dry handling performance thanks to PowerSipes
- › Reduced stopping distances via ActiveBand
- › Asymmetrical non-directional tread pattern.



M+S

Tyre dimensions^{*)}

Tyre width in mm **155-275**

Rim size in inches **16-20**

Speed Symbol **T / H / V / W**

Tyre cross-section **series 35-70**

Also available as SSR runflat tyre, ContiSeal™ tyre and with noise reducing ContiSilent™ technology. See [page 23 - 25](#) for further details.

ContiWinterContact™ TS 830 P



For high-performance vehicles and SUVs

- › Exceptional braking power on ice and snow
- › Better traction in snow
- › Higher mileage
- › Asymmetrical non-directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **195-295**

Rim size in inches **15-20**

Speed Symbol **T / H / V / W**

Tyre cross-section **series 30-65**

Also available as SSR runflat tyre and ContiSeal™ tyre. See [page 23 / 24](#) for further details.

Winter tyres

ContiWinterContact™ TS 810 Sport

For powerful mid-sized and luxury vehicles

- › Outstanding performance in all winter conditions
- › Superb handling and braking on dry roads
- › Excellent aquaplaning safety
- › Asymmetrical non-directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **175-285**

Rim size in inches **15-19**

Speed Symbol **T/H/V/W**

Tyre cross-section **series 35-65**

Also available as SSR runflat tyre. See [page 23](#) for further details.

ContiWinterContact™ TS 850

For compact and mid-sized vehicles

- › Improved braking performance on snow, ice and wet roads
- › Excellent driving stability in all winter conditions
- › More economical thanks to reduced rolling resistance and increased mileage
- › Directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **155-225**

Rim size in inches **14-17**

Speed Symbol **T/H/V**

Tyre cross-section **series 45-80**

Also available as ContiSeal™ tyre. See [page 24](#) for further details



The Alpine symbol identifies winter tyres according to UNECE regulations (valid in the EU and various other countries) and the tyre regulations of the USA and Canada. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow, on icy roads and in general at low temperatures.

M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

Winter tyres



ContiWinterContact™ TS 800

For compact-class vehicles

- › Superb cornering stability and grip
- › Excellent performance on snow and ice
- › Outstanding protection against aquaplaning
- › Directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **125-195**

Rim size in inches **13-15**

Speed Symbol **Q / T**

Tyre cross-section **series 50-80**

New!



AllSeasonContact™

Fully controlled and balanced throughout the year

- › Impressive grip on snowy and wet winter roads
- › Good braking performance on dry and wet summer roads
- › Best-in-class rolling resistance performance
- › Directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **155-245**

Rim size in inches **14-20**

Speed Symbol **T-W**

Tyre cross-section **series 40-70**

Also available as ContiSeal™ tyre. See [page 24](#) for further details.

Winter tyres

Conti4x4WinterContact™

For SUVs and offroad vehicles

- › Excellent traction and braking performance
- › Excellent driving comfort and a quiet ride
- › Excellent resistance to aquaplaning
- › Asymmetrical non-directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **215-275**

Rim size in inches **17-18**

Speed Symbol **H**

Tyre cross-section **series 55-65**

Also available as SSR tyre. See [page 23](#) for further details.



ContiCrossContact™ Winter

For SUVs and offroad vehicles

- › Excellent traction and braking performance on snow and wet roads
- › Brilliant handling on snowy and wet roads
- › High level of safety protection against aquaplaning
- › Asymmetrical non-directional tread pattern



M+S

Tyre dimensions^{*)}

Tyre width in mm **155-225**

Rim size in inches **14-17**

Speed Symbol **T / H / V**

Tyre cross-section **series 45-80**



The Alpine symbol identifies winter tyres according to UNECE regulations (valid in the EU and various other countries) and the tyre regulations of the USA and Canada. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow, on icy roads and in general at low temperatures.

M+S 'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

The SSR tyres from Continental – advanced runflat technology.




- › Reduced danger and hassle
- › Drive to safety for up to 80 km (50 miles) of 80 km/h (50 mph)
- › Compatible with standard wheel rims (H 2)
- › No need for a spare wheel and jack

The secret of SSR.

Continental's SSR tyres use reinforced sidewalls to support the vehicle in the event of a loss of air pressure.

SSR technology prevents the side of the flat tyre from being crushed between the road and wheel rim.



Standard tyres

The deflated tyre gets trapped beneath the rim and is destroyed



SSR runflat tyres

The stable sidewalls support the tyre if it loses air.

Increased safety thanks to reinforced sidewalls.

SSR tyres allow for a controlled continuation of your journey at a reduced speed of up to a distance of 80 km at a maximum speed of 80 km/h depending on the condition of the roads, the condition of the tyre and the weight of the vehicle.

Communication between tyre and driver.

As SSR tyres offer a very high standard of driving comfort, the driver will barely notice any loss of pressure in the tyre. For this reason, Continental SSR tyres may only be used on vehicles equipped with a tyre pressure monitoring system, which will display the drop in tyre pressure on the dashbord instrument panel.

Note:

SSR tyres may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system.

The brochure "SSR Runflat Tyres – Important information for drivers" contains important details about using SSR runflat tyres.

The tread patterns and sizes available as SSR runflat tyre can be found in the current product range of summer and winter passenger tyres.

As dealer, you need to get training and certification for the professional mounting and removal of SSR tyres under www.conti-ssr.co.uk – see also www.conti-ssr.com

(SSR training, product information and certificate).

ContiSeal™ – the self-sealing standard production tyre from Continental.

For enhanced mobility and safety, even if a foreign object penetrates the tyre tread.

ContiSeal™ tyres contain an innovative technology which seals punctures in the tread area. ContiSeal™ tyres have a sticky, viscous layer in the tread area that instantly seals punctures caused by nails and other objects up to 5 mm in diameter. The layer temporarily seals the vast majority of tyre tread punctures.

The material in the sealant layer prevents air loss even if the penetrating object becomes dislodged. As a result there is no need to stop straight away or change the tyre immediately in the event of a puncture. Despite this, the tyre should be taken as soon as possible to a tyre specialist who can examine it to determine if it needs a permanent repair.

ContiSeal™ tyres are instantly recognisable by the nail symbol on the sidewall and are compatible with all commonly available wheel rims.

ContiSeal™ tyres – the benefits at a glance:

- › punctures in the tread area caused by penetrating objects up to 5 mm in diameter are sealed
- › holes are sealed even if the penetrating object becomes dislodged
- › same high performance under normal driving conditions as non ContiSeal™ tyres
- › no need to stop straight away or change the tyre

For detailed information about ContiSeal™ tyres – use, inspection, storing, mouting / demounting, repair, disposal – please see www.contiseal.com



ContiSilent™ – the tyre for less interior noise.



- › Reduced interior noise on all road surfaces
- › ContiSilent™ functions in all weather conditions
- › No change in any other driving characteristics
- › No negative influence on mileage and load / speed capability
- › Same mounting and storage as for standard tyres

Technical highlights.

ContiSilent™ is a tyre noise-reducing technology developed by Continental. It is designed to reduce interior noise on all road surfaces. ContiSilent™ tyres are equipped with an inner tyre absorber, a polyurethane foam, attached to the inner surface of the tread area with an adhesive. Regardless of the temperature, the structure of the foam stays intact.

ContiSilent™ helps reduce interior vehicle noise up to 9 dB(A), depending on the type of vehicle, its speed and the road surface. It is available for summer and winter tyres and is compatible with all commonly available rims. Driving performance is not affected and there is no negative influence on mileage and load / speed capability. Fitting on four positions is recommended.

ContiSilent™ principle.

ContiSilent™ tyre.

A ContiSilent™ tyre contains a polyurethane foam. It is firmly attached to an adhesive layer on the inner surface of the tyre tread area.



For further information please visit
www.continental-tires.com/car/technology/contisilent

Standard tyre



VS

ContiSilent™ tyre



Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
82/80 series							
175 R 13	86	530	4.50 B ⁴⁾	179			
			5.00 B ⁴⁾	184	622	274	1861
			5.50 B ⁴⁾	189			
			6.00 B ⁴⁾	194			
125/80 R 13	65	290	3.00 B ⁴⁾	126			
			3.50 B ⁴⁾	131	538	243	1617
			4.00 B ⁴⁾	136			
135/80 R 13	70	335	3.50 B ⁴⁾	138	554	249	1665
			4.00 B ⁴⁾	143			
			4.50 B ⁴⁾	148			
145/80 R 13	75	387	3.50 B ⁴⁾	146			
			4.00 B ⁴⁾	151	572	255	1714
			4.50 B ⁴⁾	156			
			5 J	161			
155/80 R 13	79	437	4.00 B ⁴⁾	158			
155/80 R 13 XL	83	487	4.50 B ⁴⁾	163	588	262	1763
			5.00 B ⁴⁾	168			
165/80 R 13	83	487	4.00 B ⁴⁾	167			
165/80 R 13 XL	87	545	4.50 B ⁴⁾	172	604	268	1812
			5.00 B ⁴⁾	177			
			5.50 B ⁴⁾	182			
145/80 R 14	76	400	3.50 B ⁴⁾	146			
			4.00 B ⁴⁾	151	598	268	1793
			4.50 B ⁴⁾	156			
			5.00 B ⁴⁾	161			
165/80 R 14	85	515	4 J	167			
			4 ½ J	172	630	281	1891
			5 J	177			
			5 ½ J	182			
175/80 R 14	88	560	4 ½ J	179			
			5 J	184	648	287	1940
			5 ½ J	189			
			6 J	194			
185/80 R 14	91	615	4 ½ J	186			
			5 J	191	664	293	1989
			5 ½ J	196			
			6 J	201			
165/80 R 15	87	545	4 J	167			
			4 ½ J	172	655	293	1967
			5 J	177			
			5 ½ J	182			
195/80 R 15	96	710	5 J	199			
			5 ½ J	204	705	312	2114
			6 J	209			
			6 ½ J	214			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
80 series							
215/80 R 15	102	850	5 ½ J	220			
			6 J	225	739	325	2211
			6 ½ J 7 J	230 235			
205/80 R 16 XL / Rf.	104	900	5 J	206			
			5 ½ J	211	748	331	2239
			6 J 6 ½ J	216 221			
			7 J	226			
75 series							
205/75 R 15	97	730	5 J	206			
			5 ½ J	211	701	311	2101
			6 J 6 ½ J	216 221			
			7 J	226			
215/75 R 15	100	800	5 ½ J	220			
			6 J	225	715	316	2144
			6 ½ J 7 J	230 235			
225/75 R 15	102	850	6 J	232	733	322	2193
			6 ½ J 7 J 7 ½ J	237 242 247			
P 235/75 R 15	105	925	6 J	239			
235/75 R 15 XL	109	1030	6 ½ J	244	747	328	2236
			7 J 7 ½ J	249 254			
			8 J	259			
265/75 R 15	112	1120	7 J	273			
			7 ½ J	278	795	346	2376
			8 J 8 ½ J 9 J	283 288 293			
215/75 R 16 XL	107	975	5 ½ J	220			
			6 J	225	740	329	2220
			6 ½ J 7 J	230 235			
225/75 R 16	104	900	6 J	232	758	335	2269
225/75 R 16 XL	108	1000	6 ½ J 7 J 7 ½ J	237 242 247			
235/75 R 16	108	1000	6 J	239			
235/75 R 16 XL	112	1120	6 ½ J	244	772	340	2312
			7 J 7 ½ J 8 J	249 254 259			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / – 2 % (mm)	Rolling circumference ³⁾ + 1.5 % – 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
75 series							
245/75 R 16	111	1090	6 ½ J	253			
			7 J	258	788	347	2361
			7 ½ J	263			
			8 J	268			
265/75 R 16	116	1250	7 J	273			
			7 ½ J	278	820	358	2452
			8 J	283			
			8 ½ J	288			
			9 J	293			
235/75 R 17	109	1030	6 J	239			
			6 ½ J	244	798	353	2391
			7 J	249			
			7 ½ J	254			
			8 J	259			
70 series							
135/70 R 13	68	315	3.50 B ⁴⁾	139			
			4.00 B ⁴⁾	144	528	239	1586
			4.50 B ⁴⁾	149			
145/70 R 13	71	345	3.50 B ⁴⁾	146			
			4.00 B ⁴⁾	151			
			4.50 B ⁴⁾	156	542	245	1629
			5.00 B ⁴⁾	161			
155/70 R 13	75	387	4.00 B ⁴⁾	158			
			4.50 B ⁴⁾	163	556	250	1671
			5.00 B ⁴⁾	168			
165/70 R 13	79	437	4.00 B ⁴⁾	167			
165/70 R 13 XL / Rf.	83	487	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	572	255	1714
			5.50 B ⁴⁾	182			
175/70 R 13	82	475	4.50 B ⁴⁾	179			
175/70 R 13 XL	86	530	5.00 B ⁴⁾	184	586	261	1757
			5.50 B ⁴⁾	189			
			6.00 B ⁴⁾	194			
185/70 R 13	86	530	4.50 B ⁴⁾	187			
			5.00 B ⁴⁾	192			
			5.50 B ⁴⁾	197	600	266	1800
			6.00 B ⁴⁾	202			
155/70 R 14	77	412	4.00 B ⁴⁾	158			
			4.50 B ⁴⁾	163	582	263	1751
			5.00 B ⁴⁾	168			
165/70 R 14	81	462	4 J	167			
165/70 R 14 XL / Rf.	85	515	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	598	268	1793
			5.50 B ⁴⁾	182			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
70 series							
175/70 R 14	84	500	4 ½ J	179			
175/70 R 14 XL	88	560	5.00 B ⁴⁾	184	612	274	1836
			5.50 B ⁴⁾	189			
			6 J	194			
185/70 R 14	88	560	4 ½ J	187			
185/70 R 14 XL	92	630	5 J	192			
			5 ½ J	197	626	279	1879
			6 J	202			
195/70 R 14	91	615	5 J	199			
			5 ½ J	204	640	285	1922
			6 J	209			
			6 ½ J	214			
205/70 R 14	95	690	5 J	207			
205/70 R 14 XL	98	750	5 ½ J	212			
			6 J	217	656	290	1964
			6 ½ J	222			
			7 J	227			
135/70 R 15	70	335	3 ½ J	139			
			4 J	144	579	265	1742
			4 ½ J	149			
155/70 R 15	78	425	4 J	158			
			4 ½ J	163	607	276	1827
			5 J	168			
195/70 R 15 Rf.	97	730	5 J	199			
			5 ½ J	204			
			6 J	209	665	297	1998
			6 ½ J	214			
205/70 R 15	96	710	5 J	207			
205/70 R 15 XL	100	800	5 ½ J	212			
			6 J	217	681	303	2040
			6 ½ J	222			
			7 J	227			
215/70 R 15	98	750	5 ½ J	220			
			6 J	225			
			6 ½ J	230	695	308	2083
			7 J	235			
225/70 R 15 P 225/70 R 15	100	800	6 J	232			
			6 ½ J	237	709	314	2126
			7 J	242			
			7 ½ J	247			
235/70 R 15 P 235/70 R 15	103	875	6 J	240			
			6 ½ J	245			
			7 J	250	725	319	2169
			7 ½ J	255			
			8 J	260			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
70 series							
255/70 R 15	108	1000	6 ½ J	260			
			7 J	265			
			7 ½ J	270	753	330	2254
			8 J	275			
265/70 R 15	112	1120	8 ½ J	280			
			7 J	273			
			7 ½ J	278			
			8 J	283	767	336	2297
195/70 R 16	94	670	8 ½ J	288			
			9 J	293			
			5 J	199			
			5 ½ J	204			
205/70 R 16	97	730	6 J	209	690	310	2074
			6 ½ J	214			
			5 J	207			
			5 ½ J	212			
215/70 R 16	100	800	6 J	217	706	315	2117
			6 ½ J	222			
			7 J	227			
			5 ½ J	220			
215/70 R 16 XL	104	900	6 J	225			
			6 ½ J	230	720	321	2159
			7 J	235			
			6 J	232			
225/70 R 16	102	850	6 ½ J	237	734	326	2202
			103	875			
			7 J	242			
			7 ½ J	247			
225/70 R 16 XL	107	975	7 J	242			
			7 ½ J	247			
			6 J	240			
			6 ½ J	245			
P 235/70 R 16	104	900	7 J	250	750	332	2245
			7 ½ J	255			
			8 J	260			
			6 ½ J	253			
245/70 R 16	107	975	7 J	258	764	337	2288
			7 ½ J	263			
			8 J	268			
			6 ½ J	260			
245/70 R 16 XL	111	1090	7 J	265			
			7 ½ J	270	778	343	2330
			8 J	275			
			8 ½ J	280			
255/70 R 16	111	1090	6 ½ J	260			
			7 J	265			
			7 ½ J	270	778	343	2330
			8 J	275			
255/70 R 16 XL	115	1215	8 ½ J	280			
			7 J	265			
			6 ½ J	260			
			7 ½ J	270	778	343	2330
265/70 R 16	112 114	1120 1180	7 J	273			
			7 ½ J	278			
			8 J	283	792	348	2373
			8 ½ J	288			
265/70 R 16	112 114	1120 1180	9 J	293			
			8 ½ J	288			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / - 2 % (mm)	+ 1.5 % - 2.5 % (mm)
70 series							
275/70 R 16	114	1180	7 J	280			
			7 ½ J	285			
			8 J	290	808	354	2416
			8 ½ J	295			
225/70 R 17 XL	108	1000	9 J	300			
			6 J	232			
			6 ½ J	237	760	339	2281
			7 J	242			
235/70 R 17 XL	109 111	1030 1090	7 ½ J	247			
			6 J	240			
			6 ½ J	245			
			7 J	250	776	345	2324
P 245/70 R 17	108	1000	7 ½ J	255			
			8 J	260			
			6 ½ J	253			
			7 J	258	790	350	2367
245/70 R 17 XL	114	1180	7 ½ J	263			
			8 J	268			
			6 ½ J	260			
			7 J	265			
P 255/70 R 17	110	1060	7 ½ J	270	804	356	2410
			8 J	275			
			8 ½ J	280			
			7 J	265			
265/70 R 17	115	1215	7 J	273			
			7 ½ J	278			
			8 J	283	818	361	2452
			8 ½ J	288			
235/70 R 18 XL	110	1060	9 J	293			
			6 J	240			
			6 ½ J	245			
			7 J	250	801	357	2400
265/70 R 18	116	1250	7 ½ J	255			
			8 J	260			
			7 J	273			
			7 ½ J	278			
155/70 R 19	84	500	8 J	283	843	374	2528
			8 ½ J	288			
			9 J	293			
			4 J	158			
155/70 R 19 XL	88	560	4 ½ J	163	709	327	2138
			5 J	168			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
65 series							
155/65 R 13	73	365	4.50 B ⁴⁾	163	540	244	1623
			5.00 B ⁴⁾	168			
			5.50 B ⁴⁾	173			
165/65 R 13	77	412	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	552	248	1659
			5.50 B ⁴⁾	182			
175/65 R 13	80	450	6.00 B ⁴⁾	187			
			5.00 B ⁴⁾	184	568	254	1702
			5.50 B ⁴⁾	189			
155/65 R 14	75	387	6.00 B ⁴⁾	194			
			4.50 B ⁴⁾	163	566	257	1702
			5.00 B ⁴⁾	168			
165/65 R 14	79	437	5.50 B ⁴⁾	173			
			4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	578	261	1739
175/65 R 14	82	475	5.50 B ⁴⁾	182			
			6 J	187			
			5.00 B ⁴⁾	184	594	267	1781
175/65 R 14 XL / Rf.	86	530	5.50 B ⁴⁾	189			
			6 J	194			
			5 J	192			
185/65 R 14	86	530	5 ½ J	197	606	272	1818
			6 J	202			
			6 ½ J	207			
185/65 R 14 XL	90	600	5 ½ J	204			
			6 J	209	620	277	1861
			6 ½ J	214			
195/65 R 14	89	580	7 J	219			
			4 J	151			
			4 ½ J	156	577	264	1735
145/65 R 15	72	355	5 J	161			
			4 ½ J	163	591	269	1778
			5 J	168			
155/65 R 15	77	412	5 ½ J	173			
			4 ½ J	172			
			5 J	177	603	274	1815
165/65 R 15	81	462	5 ½ J	182			
			6 J	187			
			5 J	184	619	279	1857
175/65 R 15	84	500	5 ½ J	189			
			6 J	194			
			5 J	192			
175/65 R 15 XL	88	560	5 ½ J	197	631	284	1894
			6 J	202			
			6 ½ J	207			
185/65 R 15	88	560	5 J	192			
			5 ½ J	197	631	284	1894
			6 J	202			
185/65 R 15 XL / Rf.	92	630	6 ½ J	207			
			5 ½ J	197			
			6 J	202			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
65 series							
195/65 R 15	91	615	5 ½ J	204			
195/65 R 15 XL / Rf.	95	690	6 J	209	645	290	1937
			6 ½ J	214			
			7 J	219			
205/65 R 15	94	670	5 ½ J	212			
205/65 R 15 XL / Rf.	99	775	6 J	217	657	294	1973
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/65 R 15	96	710	6 J	225			
215/65 R 15 Rf.	100	800	6 ½ J	230	673	300	2016
			7 J	235			
			7 ½ J	240			
195/65 R 16	92	630	5 ½ J	204			
			6 J	209	670	302	2013
			6 ½ J	214			
			7 J	219			
205/65 R 16	95	690	5 ½ J	212			
			6 J	217	682	307	2050
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/65 R 16	98	750	6 J	225			
215/65 R 16 XL	102	850	6 ½ J	230	698	312	2092
			7 J	235			
			7 ½ J	240			
235/65 R 16	103	875	6 ½ J	245			
			7 J	250	724	322	2172
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
255/65 R 16	109	1030	7 J	265			
			7 ½ J	270	752	332	2251
			8 J	275			
			8 ½ J	280			
			9 J	285			
205/65 R 17	96	710	5 ½ J	212			
			6 J	217	708	320	2129
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
65 series							
215/65 R 17	99	775	6 J	225			
215/65 R 17 XL	103	875	6 ½ J	230	724	325	2172
			7 J	235			
			7 ½ J	240			
225/65 R 17	102	850	6 J	232			
225/65 R 17 XL	106	950	6 ½ J	237	736	330	2208
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/65 R 17	103	875	6 ½ J	245			
	104	900	7 J	250	750	335	2251
235/65 R 17 XL	108	1000	7 ½ J	255			
			8 J	260			
			8 ½ J	265			
245/65 R 17	107	975	7 J	258	762	340	2288
245/65 R 17 XL	111	1090	7 ½ J	263			
			8 J	268			
			8 ½ J	273			
255/65 R 17	110	1060	7 J	265			
255/65 R 17 XL	114	1180	7 ½ J	270	778	345	2330
			8 J	275			
			8 ½ J	280			
			9 J	285			
265/65 R 17	112	1120	7 ½ J	278			
265/65 R 17 XL	116	1250	8 J	283	790	350	2367
			8 ½ J	288			
			9 J	293			
			9 ½ J	298			
275/65 R 17	115	1215	7 ½ J	285			
			8 J	290	804	356	2410
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
285/65 R 17	116	1250	8 J	299			
			8 ½ J	304	816	360	2446
			9 J	309			
			9 ½ J	314			
			10 J	319			
235/65 R 18	106	950	6 ½ J	245			
235/65 R 18 XL	110	1060	7 J	250	775	348	2327
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
65 series							
255/65 R 18	111	1090	7 J	265			
			7 ½ J	270	803	358	2406
			8 J	275			
			8 ½ J	280			
9 J	285						
265/65 R 18	114	1180	7 ½ J	278			
			8 J	283	815	363	2443
			8 ½ J	288			
			9 J	293			
9 ½ J	298						
275/65 R 18	116	1250	7 ½ J	285			
			8 J	290	829	368	2486
			8 ½ J	295			
			9 J	300			
9 ½ J	305						
235/65 R 19 XL	109	1030	6 ½ J	245			
			7 J	250	801	361	2406
			7 ½ J	255			
			8 J	260			
8 ½ J	265						
60 series							
175/60 R 13	77	412	5 J	184	548	247	1647
			5 ½ J	189			
			6 J	194			
185/60 R 13	80	450	5.00 B ⁴⁾	192			
			5.50 B ⁴⁾	197	560	252	1684
			6.00 B ⁴⁾	202			
			6 ½ J	207			
165/60 R 14	75	387	4 ½ J	172			
165/60 R 14 XL	79	437	5 J ⁵⁾	177	562	255	1690
			5 ½ J	182			
			6 J	187			
175/60 R 14	79	437	5 J ⁵⁾	184	574	260	1726
			5 ½ J	189			
			6 J	194			
185/60 R 14	82	475	5 J	192			
185/60 R 14 XL	86	530	5 ½ J	197	586	265	1763
			6 J	202			
			6 ½ J	207			
195/60 R 14	86	530	5 ½ J	204			
			6 J	209	600	269	1800
			6 ½ J	214			
			7 J	219			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
60 series							
155/60 R 15	74	375	4 ½ J	163	575	263	1729
			5 J	168			
			5 ½ J	174			
165/60 R 15	77	412	4.50 B ⁴⁾	172			
165/60 R 15 XL	81	462	5.00 B ⁴⁾	177	587	268	1766
			5.50 B ⁴⁾	182			
			6.00 B ⁴⁾	187			
175/60 R 15	81	462	5 J	184	599	272	1803
			5 ½ J	189			
			6 J	194			
185/60 R 15	84	500	5 J	192			
185/60 R 15 XL	88	560	5 ½ J	197	611	277	1839
			6 J	202			
			6 ½ J	207			
195/60 R 15	88	560	5 ½ J	204			
195/60 R 15 XL	92	630	6 J	209	625	282	1876
			6 ½ J	214			
			7 J	219			
205/60 R 15	91	615	5 ½ J	212			
205/60 R 15 XL / Rf.	95	690	6 J	217	637	286	1912
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/60 R 15	94	670	6 J	225			
	95	690	6 ½ J	230	649	291	1949
215/60 R 15 XL	98	750	7 J	235			
			7 ½ J	240			
225/60 R 15	96	710	6 J	232			
			6 ½ J	237	661	296	1986
			7 J	242			
			7 ½ J	247			
235/60 R 15	98	750	8 J	252			
			6 ½ J	245			
			7 J	250	675	300	2022
			7 ½ J	255			
			8 J	260			
255/60 R 15	102	850	8 ½ J	265			
			7 J	265			
			7 ½ J	270	699	310	2095
			8 J	275			
			8 ½ J	280			
			9 J	285			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
60 series							
275/60 R 15	107	975	7 ½ J	285			
			8 J	290	725	319	2169
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
185/60 R 16	86	530	5 J	192			
			5 ½ J	197	636	290	1915
			6 J	202			
			6 ½ J	207			
195/60 R 16	89	580	5 ½ J	204			
195/60 R 16 XL	93	650	6 J	209	650	294	1952
			6 ½ J	215			
			7 J	220			
205/60 R 16	92	630	5 ½ J	212			
205/60 R 16 XL	96	710	6 J	217	662	299	1989
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/60 R 16	95	690	6 J	225			
215/60 R 16 XL/Rf.	99	775	6 ½ J	230	674	304	2025
			7 J	235			
			7 ½ J	240			
225/60 R 16	98	750	6 J	232			
225/60 R 16 XL/Rf.	102	850	6 ½ J	237	686	308	2062
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 16	100	800	6 ½ J	245			
235/60 R 16 XL/Rf.	104	900	7 J	250	700	313	2098
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
205/60 R 17	93	650	5 ½ J	212			
205/60 R 17 XL	97	730	6 J	217	688	312	2068
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/60 R 17	96	710	6 J	225			
215/60 R 17 XL	100	800	6 ½ J	230	700	317	2105
			7 J	235			
			7 ½ J	240			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
60 series							
225/60 R 17	99	775	6 J	232			
225/60 R 17 XL	103	875	6 ½ J	237	712	321	2141
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 17	102	850	6 ½ J	245			
235/60 R 17 XL	106	950	7 J	250	726	326	2178
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
255/60 R 17	106	950	7 J	265			
			7 ½ J	270	750	335	2251
			8 J	275			
			8 ½ J	280			
			9 J	285			
275/60 R 17	110	1060	7 ½ J	285			
			8 J	290	776	345	2324
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
215/60 R 18	98	750	6 J	225			
			6 ½ J	230	725	329	2181
			7 J	235			
			7 ½ J	240			
P 225/60 R 18	99	775	6 J	232			
225/60 R 18	100	800	6 ½ J	237	737	334	2217
225/60 R 18 XL	104	900	7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 18	103	875	6 ½ J	245			
235/60 R 18 XL	107	975	7 J	250	751	338	2254
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
P 245/60 R 18	104	900	7 J	258	763	343	2291
245/60 R 18	105	925	7 ½ J	263			
			8 J	268			
			8 ½ J	273			
255/60 R 18	108	1000	7 J	265			
255/60 R 18 XL	112	1120	7 ½ J	270	775	348	2327
			8 J	275			
			8 ½ J	281			
			9 J	286			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
60 series							
265/60 R 18	110	1060	7 ½ J	278			
265/60 R 18 XL	114	1180	8 J	283	787	353	2364
			8 ½ J	288			
			9 J	293			
			9 ½ J	298			
275/60 R 18	113	1150	7 ½ J	285			
			8 J	290	801	357	2400
			8 ½ J	295			
			9 J	300			
9 ½ J	305						
285/60 R 18	116	1250	8 J	299			
			8 ½ J	304	813	362	2437
			9 J	309			
			9 ½ J	314			
10 J	319						
255/60 R 19	109	1030	7 J	265			
255/60 R 19 XL	113	1150	7 ½ J	270	801	361	2406
			8 J	275			
			8 ½ J	280			
			9 J	285			
235/60 R 20 XL	108	1000	6 ½ J	245			
			7 J	250	802	364	2410
			7 ½ J	255			
			8 J	260			
8 ½ J	265						
275/60 R 20	115	1215	7 ½ J	285			
275/60 R 20 XL	119	1360	8 J	290	852	383	2556
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
55 series							
195/55 R 13	80	450	5.50 B ⁴⁾	204			
			6.00 B ⁴⁾	209	552	248	1659
			6 ½ J	214			
			7 J	219			
185/55 R 14	80	450	5 J	192			
			5 ½ J	197			
			6 J	202	568	258	1708
			6 ½ J	207			
175/55 R 15	77	412	5 J	184			
			5 ½ J	189	581	265	1748
			6 J	194			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
55 series							
185/55 R 15	82	475	5 J	192			
185/55 R 15 XL/Rf	86	530	5 ½ J	197			
			6 J	202	593	270	1784
			6 ½ J	207			
195/55 R 15	85	515	5 ½ J	204			
195/55 R 15 XL/Rf.	89	580	6 J	209	603	274	1815
			6 ½ J	214			
			7 J	219			
205/55 R 15	88	560	5 ½ J	213			
			6 J	218			
			6 ½ J	223	617	279	1851
			7 J	228			
			7 ½ J	233			
225/55 R 15	92	630	6 J	232			
			6 ½ J	237			
			7 J	242	639	287	1918
			7 ½ J	247			
			8 J	252			
185/55 R 16	83	487	5 J	192			
185/55 R 16 XL	87	545	5 ½ J	197			
			6 J	202	618	283	1861
			6 ½ J	207			
195/55 R 16	87	545	5 ½ J	204			
195/55 R 16 XL	91	615	6 J	209	628	286	1891
			6 ½ J	214			
			7 J	219			
205/55 R 16	91	615	5 ½ J	213			
205/55 R 16 XL	94	670	6 J	218			
			6 ½ J	223	642	291	1928
			7 J	228			
			7 ½ J	233			
215/55 R 16	93	650	6 J	225			
215/55 R 16 XL	97	730	6 ½ J	230			
			7 J	235	652	295	1958
			7 ½ J	240			
225/55 R 16	95	690	6 J	232			
225/55 R 16 XL	99	775	6 ½ J	237			
			7 J	242	664	300	1995
			7 ½ J	247			
			8 J	252			
255/55 R 16	103	875	7 J	266			
			7 ½ J	271			
			8 J	276	698	312	2092
			8 ½ J	281			
			9 J	286			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
55 series							
195/55 R 17	88	560	5 ½ J	204			
			6 J	209	654	299	1970
			6 ½ J	214			
			7 J	219			
205/55 R 17	91	615	5 ½ J	213			
205/55 R 17 XL	95	690	6 J	218			
			6 ½ J	223	668	304	2007
			7 J	228			
			7 ½ J	233			
215/55 R 17	94	670	6 J	225			
215/55 R 17 XL	98	750	6 ½ J	230			
			7 J	235	678	308	2037
			7 ½ J	240			
225/55 R 17	97	730	6 J	232			
225/55 R 17 XL/Rf.	101	825	6 ½ J	237			
			7 J	242	690	313	2074
			7 ½ J	247			
			8 J	252			
235/55 R 17	99	775	6 ½ J	245			
235/55 R 17 XL/Rf.	103	875	7 J	250			
			7 ½ J	255	700	317	2105
			8 J	260			
			8 ½ J	265			
245/55 R 17	102	850	7 J	258			
			7 ½ J	263	712	321	2141
			8 J	268			
			8 ½ J	273			
255/55 R 17	104	900	7 J	266			
			7 ½ J	271			
			8 J	276	724	325	2172
			8 ½ J	281			
275/55 R 17	109	1030	9 J	286			
			7 ½ J	285			
			8 J	290			
			8 ½ J	295	746	334	2239
			9 J	300			
205/55 R 18 XL	96	710	9 ½ J	305			
			5 ½ J	213			
			6 J	218			
			6 ½ J	223	693	317	2083
			7 J	228			
			7 ½ J	233			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
55 series							
215/55 R 18	95	690	6 J	225			
215/55 R 18 XL	99	775	6 ½ J	230			
			7 J	235	703	321	2114
			7 ½ J	240			
225/55 R 18	98	750	6 J	232			
225/55 R 18 XL	102	850	6 ½ J	237			
			7 J	242	715	325	2150
			7 ½ J	247			
			8 J	252			
235/55 R 18	100	800	6 ½ J	245			
235/55 R 18 XL	104	900	7 J	250			
			7 ½ J	255	725	329	2181
			8 J	260			
			8 ½ J	266			
245/55 R 18 XL	107	975	7 J	258			
			7 ½ J	263	737	334	2217
			8 J	268			
			8 ½ J	273			
255/55 R 18	105	925	7 J	266			
255/55 R 18 XL	109	1030	7 ½ J	271			
			8 J	276	749	338	2248
			8 ½ J	281			
			9 J	286			
205/55 R 19 XL	97	730	5 ½ J	213			
			6 J	218			
			6 ½ J	223	719	330	2162
			7 J	228			
			7 ½ J	233			
225/55 R 19	99	775	6 J	232			
225/55 R 19 XL	103	875	6 ½ J	237			
			7 J	242	741	338	2230
			7 ½ J	247			
			8 J	252			
235/55 R 19	101	825	6 ½ J	245			
235/55 R 19 XL	105	925	7 J	250			
			7 ½ J	255	751	342	2260
			8 J	260			
			8 ½ J	266			
245/55 R 19	103	875	7 J	258			
			7 ½ J	263	763	347	2297
			8 J	268			
			8 ½ J	273			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
55 series							
255/55 R 19	107	975	7 J	265			
255/55 R 19 XL	111	1090	7 ½ J	270			
			8 J	276	775	351	2327
			8 ½ J	281			
			9 J	286			
265/55 R 19	109	1030	7 ½ J	278			
265/55 R 19 XL	113	1150	8 J	283			
			8 ½ J	288	787	355	2364
			9 J	293			
			9 ½ J	298			
275/55 R 19	111	1090	7 ½ J	285			
			8 J	290			
			8 ½ J	295	797	359	2394
			9 J	300			
			9 ½ J	305			
195/55 R 20 XL	95	690	5 ½ J	204			
			6 J	209	730	337	2202
			6 ½ J	214			
			7 J	219			
235/55 R 20	102	850	6 ½ J	245			
235/55 R 20 XL	105	925	7 J	250			
			7 ½ J	255	776	355	2336
			8 J	260			
			8 ½ J	265			
255/55 R 20	107	975	7 J	265			
255/55 R 20 XL	110	1060	7 ½ J	270			
			8 J	276	800	363	2403
			8 ½ J	281			
			9 J	286			
275/55 R 20 XL	117	1285	7 ½ J	285			
			8 J	290			
			8 ½ J	295	822	372	2471
			9 J	300			
			9 ½ J	305			
50 series							
175/50 R 13	72	355	5.00 B ⁴⁾	184			
			5.50 B ⁴⁾	189	514	234	1543
			6.00 B ⁴⁾	194			
185/50 R 14	77	412	5 J	192			
			5 ½ J	197			
			6 J	202	550	251	1653
			6 ½ J	207			
165/50 R 15	72	355	4 ½ J	172			
			5 J	177	553	255	1668
			5 ½ J	182			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
50 series							
195/50 R 15	82	475	5 ½ J	204			
			6 J	209	585	267	1760
			6 ½ J 7 J	214 219			
205/50 R 15	86	530	5 ½ J	213			
			6 J	218			
			6 ½ J	223	595	271	1790
			7 J 7 ½ J	228 233			
185/50 R 16	81	462	5 J	192			
			5 ½ J	197			
			6 J	202	600	276	1806
			6 ½ J	207			
195/50 R 16	84	500	5 ½ J	204			
195/50 R 16 XL	88	560	6 J	209	610	279	1836
			6 ½ J 7 J	214 219			
205/50 R 16	87	545	5 ½ J	213			
			6 J	218			
			6 ½ J	223	620	283	1867
			7 J 7 ½ J	228 233			
225/50 R 16	92 93	630 650	6 J	232			
			6 ½ J	237			
			7 J	242	642	291	1928
			7 ½ J 8 J	247 252			
205/50 R 17	89	580	5 ½ J	213			
205/50 R 17 XL	93	650	6 J	218			
			6 ½ J	223	646	296	1946
			7 J 7 ½ J	228 233			
215/50 R 17	91	615	6 J	225			
215/50 R 17 XL	95	690	6 ½ J	230			
			7 J	235	656	300	1976
			7 ½ J	240			
225/50 R 17	94	670	6 J	232			
225/50 R 17 XL	98	750	6 ½ J	237			
			7 J	242	668	304	2007
			7 ½ J	247			
			8 J	252			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
50 series							
235/50 R 17	96	710	6 ½ J	245			
235/50 R 17 XL	100	800	7 J	250			
			7 ½ J	255	678	308	2037
			8 J	260			
			8 ½ J	265			
245/50 R 17	99	775	7 J	258			
			7 ½ J	263	688	312	2068
			8 J	268			
			8 ½ J	273			
215/50 R 18	92	630	6 J	225			
215/50 R 18 XL	96	710	6 ½ J	230			
			7 J	235	681	313	2053
			7 ½ J	240			
225/50 R 18	95	690	6 J	232			
225/50 R 18 XL	99	775	6 ½ J	237			
			7 J	242	693	317	2083
			7 ½ J	247			
			8 J	252			
235/50 R 18	97	730	6 ½ J	245			
235/50 R 18 XL	101	825	7 J	250			
			7 ½ J	255	703	321	2114
			8 J	260			
			8 ½ J	265			
245/50 R 18	100	800	7 J	258			
245/50 R 18 XL	104	900	7 ½ J	263	713	324	2144
			8 J	268			
			8 ½ J	273			
285/50 R 18	109	1030	8 J	299			
			8 ½ J	304			
			9 J	309	755	340	2266
			9 ½ J	314			
			10 J	319			
235/50 R 19	99	775	6 ½ J	245			
235/50 R 19 XL	103	875	7 J	250			
			7 ½ J	255	729	334	2193
			8 J	260			
			8 ½ J	265			
245/50 R 19	101	825	7 J	258			
245/50 R 19 XL	105	925	7 ½ J	263	739	337	2223
			8 J	268			
			8 ½ J	273			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
50 series							
255/50 R 19	103	875	7 J	266			
255/50 R 19 XL	107	975	7 ½ J	271			
			8 J	276	749	341	2254
			8 ½ J	281			
			9 J	286			
265/50 R 19	106	950	7 ½ J	278			
265/50 R 19 XL	110	1060	8 J	283			
			8 ½ J	288	759	345	2284
			9 J	293			
			9 ½ J	298			
275/50 R 19 XL	112	1120	7 ½ J	285			
			8 J	290			
			8 ½ J	295	771	349	2315
			9 J	300			
			9 ½ J	305			
245/50 R 20	102	850	7 J	258			
245/50 R 20 XL	105	925	7 ½ J	263	764	350	2300
			8 J	268			
			8 ½ J	273			
255/50 R 20	105	925	7 J	266			
255/50 R 20 XL	109	1030	7 ½ J	271			
			8 J	276	774	354	2330
			8 ½ J	281			
			9 J	286			
265/50 R 20 XL	111	1090	7 ½ J	278			
			8 J	283			
			8 ½ J	288	784	358	2361
			9 J	294			
			9 ½ J	299			
275/50 R 20	109	1030	7 ½ J	285			
275/50 R 20 XL	113	1150	8 J	290			
			8 ½ J	295	796	362	2391
			9 J	301			
			9 ½ J	306			
285/50 R 20	112	1120	8 J	299			
285/50 R 20 XL	116	1250	8 ½ J	304			
			9 J	309	806	366	2422
			9 ½ J	314			
			10 J	319			
295/50 R 20 XL	118	1320	8 J	306			
			8 ½ J	311			
			9 J	316			
			9 ½ J	321	816	369	2452
			10 J	326			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
50 series							
305/50 R 20 XL	120	1400	8 ½ J	319			
			9 J	324			
			9 ½ J	329	826	373	2483
			10 J	334			
			10 ½ J	339			
			11 J	344			
255/50 R 21 XL	109	1030	7 J	266			
			7 ½ J	271			
			8 J	276	799	366	2406
			8 ½ J	281			
			9 J	286			
275/50 R 21 XL	113	1150	7 ½ J	285			
			8 J	290			
			8 ½ J	295	821	374	2467
			9 J	301			
			9 ½ J	306			
45 series							
195/45 R 13	75	387	6 J	198			
			6 ½ J	203	514	234	1543
			7 J	208			
			7 ½ J	213			
195/45 R 14	77	412	6 J	198			
			6 ½ J	203	540	247	1623
			7 J	208			
			7 ½ J	213			
195/45 R 15	78	425	6 J	198			
			6 ½ J	203	565	259	1699
			7 J	208			
			7 ½ J	213			
195/45 R 16	80	450	6 J	198			
195/45 R 16 XL	84	500	6 ½ J	203	590	272	1775
			7 J	208			
			7 ½ J	213			
205/45 R 16	83	487	6 ½ J	209			
205/45 R 16 XL	87	545	7 J	214	598	275	1800
			7 ½ J	219			
215/45 R 16	86	530	7 J	222	608	279	1830
215/45 R 16 XL	90	600	7 ½ J	227			
			8 J	232			
225/45 R 16	89	580	7 J	229			
			7 ½ J	234	616	282	1854
			8 J	239			
			8 ½ J	244			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / - 2 % (mm)	+ 1.5 % - 2.5 % (mm)
	LI	kg					
45 series							
245/45 R 16	94	670	7 ½ J	248			
			8 J	253	634	289	1909
			8 ½ J	258			
			9 J	263			
			6 J	198			
			6 ½ J	203	616	285	1854
195/45 R 17	81	462	7 J	208			
			7 ½ J	213			
205/45 R 17	84	500	6 ½ J	209			
205/45 R 17 XL	88	560	7 J	214	624	288	1879
			7 ½ J	219			
215/45 R 17	87	545	7 J	222	634	292	1909
215/45 R 17 XL	91	615	7 ½ J	227			
			8 J	232			
225/45 R 17	91	615	7 J	229			
225/45 R 17 XL/Rf.	94	670	7 ½ J	234	642	295	1934
			8 J	239			
			8 ½ J	244			
235/45 R 17	94	670	7 ½ J	240			
235/45 R 17 XL	97	730	8 J	245	652	299	1964
			8 ½ J	250			
			9 J	255			
245/45 R 17	95	690	7 ½ J	248			
245/45 R 17 XL	99	775	8 J	253	660	302	1989
			8 ½ J	258			
			9 J	263			
255/45 R 17	98	750	8 J	260			
255/45 R 17 XL	102	850	8 ½ J	265	672	306	2019
			9 J	270			
			9 ½ J	275			
215/45 R 18 XL	93	650	7 J	222	659	304	1986
			7 ½ J	227			
			8 J	232			
225/45 R 18	91	615	7 J	229			
225/45 R 18 XL	95	690	7 ½ J	234	667	307	2010
			8 J	239			
			8 ½ J	244			
235/45 R 18	94	670	7 ½ J	240			
235/45 R 18 XL	98	750	8 J	245	677	311	2040
			8 ½ J	250			
			9 J	255			
245/45 R 18	96	710	7 ½ J	248			
245/45 R 18 XL	100	800	8 J	253	685	314	2065
			8 ½ J	258			
			9 J	263			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
45 series							
255/45 R 18	99	775	8 J	260			
255/45 R 18 XL	103	875	8 ½ J	265	697	318	2095
			9 J	270			
			9 ½ J	275			
265/45 R 18	101	825	8 ½ J	272			
			9 J	277	705	321	2120
			9 ½ J	282			
			10 J	287			
275/45 R 18	103	875	8 ½ J	279			
			9 J	284	715	325	2150
			9 ½ J	289			
			10 J	294			
			10 ½ J	299			
225/45 R 19	92	630	7 J	229			
225/45 R 19 XL	96	710	7 ½ J	234	693	320	2089
			8 J	239			
			8 ½ J	244			
235/45 R 19	95	690	7 ½ J	240			
235/45 R 19 XL	99	775	8 J	245	703	324	2120
			8 ½ J	250			
			9 J	255			
245/45 R 19	98	750	7 ½ J	248			
245/45 R 19 XL	102	850	8 J	253	711	327	2144
			8 ½ J	258			
			9 J	263			
255/45 R 19	100	800	8 J	260			
255/45 R 19 XL	104	900	8 ½ J	265	723	331	2175
			9 J	270			
			9 ½ J	275			
265/45 R 19 XL	105	925	8 ½ J	272			
			9 J	277	731	334	2199
			9 ½ J	282			
			10 J	287			
275/45 R 19 XL	108	1000	8 ½ J	279			
			9 J	284	741	338	2230
			9 ½ J	289			
			10 J	294			
			10 ½ J	299			
285/45 R 19	107	975	9 J	291			
285/45 R 19 XL	111	1090	9 ½ J	296	749	341	2254
			10 J	301			
			10 ½ J	306			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
45 series							
295/45 R 19	109	1030	9 ½ J	302			
			10 J	308	759	345	2284
			10 ½ J 11 J	312 317			
235/45 R 20 XL	100	800	7 ½ J	241			
			8 J	245	728	336	2196
			8 ½ J 9 J	251 256			
245/45 R 20	99	775	7 ½ J	248			
245/45 R 20 XL	103	875	8 J	253	736	340	2220
			8 ½ J 9 J	258 263			
255/45 R 20	101	825	8 J	260			
255/45 R 20 XL	105	925	8 ½ J	265	748	344	2251
			9 J 9 ½ J	270 275			
265/45 R 20	104	900	8 ½ J	272			
265/45 R 20 XL	108	1000	9 J	277	756	347	2275
			9 ½ J 10 J	282 287			
275/45 R 20 XL	110	1060	8 ½ J	279			
			9 J	284	766	351	2306
			9 ½ J 10 J 10 ½ J	289 294 299			
285/45 R 20 XL	112	1120	9 J	291			
			9 ½ J	296	774	354	2330
			10 J 10 ½ J	301 306			
295/45 R 20 XL	114	1180	9 ½ J	303			
			10 J	308	784	358	2361
			10 ½ J 11 J	313 318			
265/45 R 21 XL	108	1000	8 ½ J	272			
			9 J	277	781	359	2352
			9 ½ J 10 J	282 287			
275/45 R 21	107	975	8 ½ J	279			
275/45 R 21 XL	110	1060	9 J	284	791	363	2382
			9 ½ J 10 J 10 ½ J	289 294 299			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
45 series							
285/45 R 21	109	1030	9 J	291			
285/45 R 21 XL	113	1150	9 ½ J	296	799	366	2406
			10 J	301			
			10 ½ J	306			
255/45 R 22 XL	107	975	8 J	260			
			8 ½ J	265	799	369	2406
			9 J	270			
			9 ½ J	275			
285/45 R 22 XL	114	1180	9 J	291			
			9 ½ J	296	825	379	2486
			10 J	301			
			10 ½ J	306			
305/45 R 22 XL	118	1320	9 ½ J	310			
			10 J	315	843	386	2541
			10 ½ J	320			
			11 J	325			
			11 ½ J	330			
40 series							
195/40 R 14	73	365	6 ½ J	203			
			7 J	208	518	239	1562
			7 ½ J	213			
195/40 R 16 XL	80	450	6 ½ J	203			
			7 J	208	568	264	1714
			7 ½ J	213			
215/40 R 16 XL	86	530	7 J	222			
			7 ½ J	227	584	270	1763
			8 J	232			
			8 ½ J	237			
225/40 R 16	85	515	7 ½ J	234			
			8 J	239	594	273	1787
			8 ½ J	244			
			9 J	249			
195/40 R 17 XL	81	462	6 ½ J	203			
			7 J	208	594	277	1793
			7 ½ J	213			
205/40 R 17 XL	84	500	7 J	215			
			7 ½ J	220	602	280	1818
			8 J	225			
215/40 R 17	83	487	7 J	222			
215/40 R 17 XL	87	545	7 ½ J	227	610	283	1842
			8 J	232			
			8 ½ J	237			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
40 series							
235/40 R 17	90	600	8 J	246			
			8 ½ J	251	628	289	1891
			9 J	256			
			9 ½ J	261			
245/40 R 17	91	615	8 J	253			
			8 ½ J	258	636	292	1915
			9 J	263			
			9 ½ J	268			
255/40 R 17	94	670	8 ½ J	265			
255/40 R 17 XL	98	750	9 J	270	644	296	1940
			9 ½ J	275			
			10 J	280			
205/40 R 18 XL	86	530	7 J	215			
			7 ½ J	220	627	292	1894
			8 J	225			
215/40 R 18	85	515	7 J	222			
215/40 R 18 XL	89	580	7 ½ J	227	635	296	1918
			8 J	232			
			8 ½ J	237			
225/40 R 18	88	560	7 ½ J	234			
225/40 R 18 XL	92	630	8 J	239	645	299	1943
			8 ½ J	244			
			9 J	249			
235/40 R 18	91	615	8 J	246			
235/40 R 18 XL	95	690	8 ½ J	251	653	302	1967
			9 J	256			
			9 ½ J	261			
245/40 R 18	93	650	8 J	253			
245/40 R 18 XL	97	730	8 ½ J	258	661	305	1992
			9 J	263			
			9 ½ J	268			
255/40 R 18	95	690	8 ½ J	265			
255/40 R 18 XL	99	775	9 J	270	669	308	2016
			9 ½ J	275			
			10 J	280			
265/40 R 18 XL	101	825	9 J	277			
			9 ½ J	282	677	311	2040
			10 J	287			
			10 ½ J	292			
275/40 R 18	99	775	9 J	284			
275/40 R 18 XL	103	875	9 ½ J	289	685	314	2065
			10 J	294			
			10 ½ J	299			
			11 J	304			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
40 series							
225/40 R 19	89	580	7 ½ J	234			
225/40 R 19 XL	93	650	8 J	239	671	312	2022
			8 ½ J	244			
			9 J	249			
235/40 R 19	92	630	8 J	246			
235/40 R 19 XL	96	710	8 ½ J	251	679	315	2047
			9 J	256			
			9 ½ J	261			
245/40 R 19	94	670	8 J	253			
245/40 R 19 XL	98	750	8 ½ J	258	687	318	2071
			9 J	263			
			9 ½ J	268			
255/40 R 19	96	710	8 ½ J	265			
255/40 R 19 XL	100	800	9 J	270	695	321	2095
			9 ½ J	275			
			10 J	280			
265/40 R 19	98	750	9 J	277			
265/40 R 19 XL	102	850	9 ½ J	282	703	324	2120
			10 J	287			
			10 ½ J	292			
275/40 R 19	101	825	9 J	284			
275/40 R 19 XL	105	925	9 ½ J	289	711	327	2144
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/40 R 19	103	875	9 ½ J	296			
285/40 R 19 XL	107	975	10 J	302	721	330	2169
			10 ½ J	307			
			11 J	312			
295/40 R 19 XL	108	1000	10 J	308			
			10 ½ J	313	729	334	2193
			11 J	318			
			11 ½ J	323			
225/40 R 20 XL	94	580	7 ½ J	234			
			8 J	239	696	324	2098
			8 ½ J	244			
			9 J	249			
235/40 R 20 XL	96	710	8 J	246			
			8 ½ J	251	704	327	2123
			9 J	256			
			9 ½ J	261			
245/40 R 20	95	690	8 J	253			
245/40 R 20 XL	99	775	8 ½ J	258	712	330	2147
			9 J	263			
			9 ½ J	268			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
40 series							
255/40 R 20	97	730	8 ½ J	265			
255/40 R 20 XL	101	825	9 J	270	720	334	2172
			9 ½ J	275			
			10 J	280			
265/40 R 20 XL	104	900	9 J	277			
			9 ½ J	282	728	337	2196
			10 J	288			
			10 ½ J	293			
275/40 R 20 XL	106	950	9 J	284			
			9 ½ J	289	736	340	2220
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/40 R 20	104	900	9 ½ J	296			
285/40 R 20 XL	108	1000	10 J	302	746	343	2245
			10 ½ J	307			
			11 J	312			
295/40 R 20	106	950	10 J	308			
295/40 R 20 XL	110	1060	10 ½ J	313	754	346	2269
			11 J	318			
			11 ½ J	323			
305/40 R 20 XL	112	1120	10 J	316			
			10 ½ J	321			
			11 J	326	762	349	2294
			11 ½ J	331			
			12 J	336			
245/40 R 21 XL	100	800	8 J	253			
			8 ½ J	258	737	343	2223
			9 J	263			
			9 ½ J	268			
255/40 R 21 XL	102	850	8 ½ J	265			
			9 J	270	745	346	2248
			9 ½ J	275			
			10 J	280			
265/40 R 21	101	825	9 J	277			
265/40 R 21 XL	105	925	9 ½ J	282	753	349	2272
			10 J	288			
			10 ½ J	293			
275/40 R 21 XL	107	975	9 J	284			
			9 ½ J	289	761	352	2297
			10 J	294			
			10 ½ J	299			
			11 J	304			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
40 series							
285/40 R 21 XL	109	1030	9 ½ J	297			
			10 J	302	771	355	2321
			10 ½ J 11 J	307 312			
295/40 R 21 XL	111	1090	10 J	307			
			10 ½ J	313	779	359	2345
			11 J 11 ½ J	318 324			
315/40 R 21	111	1090	10 ½ J	328			
315/40 R 21 XL	115	1215	11 J	333	795	365	2394
			11 ½ J 12 J 12 ½ J	338 343 348			
325/40 R 21	113	1150	11 J	339			
			11 ½ J	344	803	368	2419
			12 J 12 ½ J 13 J	349 354 359			
255/40 R 22 XL	103	875	8 ½ J	265			
			9 J	270	771	359	2327
			9 ½ J 10 J	275 280			
265/40 R 22 XL	106	950	9 J	277			
			9 ½ J	282	779	362	2352
			10 J 10 ½ J	288 293			
275/40 R 22 XL	107 108	975 1000	9 J	284			
			9 ½ J	289	787	365	2376
			10 J 10 ½ J 11 J	294 299 304			
285/40 R 22	106	950	9 ½ J	297			
285/40 R 22 XL	110	1060	10 J	302	797	368	2400
			10 ½ J 11 J	307 312			
295/40 R 22 XL	112	1120	10 J	308			
			10 ½ J	313	805	372	2425
			11 J 11 ½ J	318 323			
305/40 R 22 XL	114	1180	10 J 10 ½ J	316 321			
			11 J	326	813	375	2449
			11 ½ J 12 J	331 336			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
40 series							
325/40 R 22	114	1180	11 J	339			
			11 ½ J	344	829	381	2498
			12 J	349			
			12 ½ J	354			
			13 J	359			
305/40 R 23 XL	115	1215	10 J	316			
			10 ½ J	321			
			11 J	326	838	387	2525
			11 ½ J	331			
			12 J	336			
285/40 R 24 XL	112	1120	9 ½ J	296			
			10 J	302	848	394	2556
			10 ½ J	307			
			11 J	312			
305/40 R 24 XL	117	1285	10 J	316			
			10 ½ J	321			
			11 J	326	864	400	2605
			11 ½ J	331			
			12 J	336			
35 series							
215/35 R 17 XL	83	487	7 J	222			
			7 ½ J	227	588	275	1775
			8 J	232			
			8 ½ J	237			
245/35 R 17	87	545	8 J	253			
			8 ½ J	258	610	283	1842
			9 J	263			
			9 ½ J	268			
215/35 R 18 XL	84	500	7 J	222			
			7 ½ J	227	613	287	1851
			8 J	232			
			8 ½ J	237			
225/35 R 18 XL	87	545	7 ½ J	234			
			8 J	239	621	290	1876
			8 ½ J	244			
			9 J	249			
245/35 R 18	88	560	8 J	253			
245/35 R 18 XL	92	630	8 ½ J	258	635	296	1918
			9 J	263			
			9 ½ J	268			
255/35 R 18	90	600	8 ½ J	265			
255/35 R 18 XL	94	670	9 J	270	643	298	1937
			9 ½ J	275			
			10 J	280			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
35 series							
265/35 R 18	93	650	9 J	277			
265/35 R 18 XL	97	730	9 ½ J	282	651	301	1961
			10 J	287			
			10 ½ J	292			
275/35 R 18	95	690	9 J	284			
275/35 R 18 XL	99	775	9 ½ J	289	657	303	1979
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 18	97	730	9 ½ J	297			
285/35 R 18 XL	101	825	10 J	302	665	307	2004
			10 ½ J	307			
			11 J	312			
215/35 R 19 XL	85	515	7 J	222			
			7 ½ J	227	639	300	1931
			8 J	232			
			8 ½ J	237			
225/35 R 19 XL	88	560	7 ½ J	234			
			8 J	239	647	303	1955
			8 ½ J	244			
			9 J	249			
235/35 R 19	87	545	8 J	246			
235/35 R 19 XL	91	615	8 ½ J	251	653	305	1973
			9 J	256			
			9 ½ J	261			
245/35 R 19 XL	93	650	8 J	253			
			8 ½ J	258	661	309	1998
			9 J	263			
			9 ½ J	268			
255/35 R 19	92	630	8 ½ J	265			
255/35 R 19 XL	96	710	9 J	270	669	311	2016
			9 ½ J	275			
			10 J	280			
265/35 R 19	94	670	9 J	277			
265/35 R 19 XL	98	750	9 ½ J	282	677	314	2040
			10 J	287			
			10 ½ J	292			
275/35 R 19 XL	100	800	9 J	284			
			9 ½ J	289	683	316	2059
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 19	99	775	9 ½ J	297			
285/35 R 19 XL	103	875	10 J	302	691	320	2083
			10 ½ J	307			
			11 J	312			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / - 2 % (mm)	+ 1.5 % - 2.5 % (mm)
	LI	kg					
35 series							
295/35 R 19	100	800	10 J	308			
295/35 R 19 XL	104	900	10 ½ J	313	697	322	2101
			11 J	318			
			11 ½ J	323			
225/35 R 20 XL	90	600	7 ½ J	234			
			8 J	239	672	316	2031
			8 ½ J	244			
			9 J	249			
235/35 R 20	88	560	8 J	246			
235/35 R 20 XL	92	630	8 ½ J	251	678	318	2050
			9 J	256			
			9 ½ J	261			
245/35 R 20	91	615	8 J	253			
245/35 R 20 XL	95	690	8 ½ J	258	686	321	2074
			9 J	263			
			9 ½ J	268			
255/35 R 20 XL	97	730	8 ½ J	265			
			9 J	270	694	323	2092
			9 ½ J	275			
			10 J	280			
265/35 R 20	95	690	9 J	277			
265/35 R 20 XL	99	775	9 ½ J	282	702	327	2117
			10 J	287			
			10 ½ J	292			
275/35 R 20 XL	102	850	9 J	284			
			9 ½ J	289	708	329	2135
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 20	100	800	9 ½ J	296			
285/35 R 20 XL	104	900	10 J	302	716	332	2159
			10 ½ J	307			
			11 J	312			
295/35 R 20	101	825	10 J	308			
295/35 R 20 XL	105	925	10 ½ J	313	722	334	2178
			11 J	318			
			11 ½ J	323			
315/35 R 20 XL	110	1060	10 ½ J	328			
			11 J	333	736	340	2220
			11 ½ J	338			
			12 J	343			
			12 ½ J	348			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
35 series							
325/35 R 20	108	1000	11 J	339			
			11 ½ J	344	746	343	2245
			12 J	349			
			12 ½ J	354			
			13 J	359			
245/35 R 21 XL	96	710	8 J	253			
			8 ½ J	258	711	334	2150
			9 J	263			
			9 ½ J	268			
255/35 R 21 XL	98	750	8 ½ J	265			
			9 J	270	719	336	2169
			9 ½ J	275			
			10 J	280			
265/35 R 21 XL	101	825	9 J	277			
			9 ½ J	282	727	339	2193
			10 J	287			
			10 ½ J	292			
275/35 R 21 XL	103	875	9 J	284			
			9 ½ J	289	733	341	2211
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 21 XL	105	925	9 ½ J	296			
			10 J	302	741	345	2236
			10 ½ J	307			
			11 J	312			
295/35 R 21	103	875	10 J	308			
295/35 R 21 XL	107	975	10 ½ J	313	747	347	2254
			11 J	318			
			11 ½ J	324			
305/35 R 21 XL	109	1030	10 J	316			
			10 ½ J	321			
			11 J	326	755	350	2278
			11 ½ J	331			
			12 J	336			
265/35 R 22 XL	102	850	9 J	277			
			9 ½ J	282	753	352	2272
			10 J	287			
			10 ½ J	292			
275/35 R 22 XL	104	900	9 J	284			
			9 ½ J	289	759	354	2291
			10 J	294			
			10 ½ J	300			
			11 J	305			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
35 series							
285/35 R 22 XL	106	950	9 ½ J	296			
			10 J	302	767	358	2315
			10 ½ J 11 J	307 312			
295/35 R 22 XL	108	1000	10 J	308			
			10 ½ J	313	773	360	2333
			11 J 11 ½ J	318 323			
325/35 R 22	110	1060	11 J	339			
325/35 R 22 XL	114	1180	11 ½ J	344	797	368	2400
			12 J	349			
			12 ½ J 13 J	354 359			
285/35 R 23 XL	107	975	9 ½ J	296			
			10 J	302	792	370	2391
			10 ½ J 11 J	307 312			
295/35 R 23 XL	108	1000	10 J	308			
			10 ½ J	313	798	372	2410
			11 J 11 ½ J	318 323			
305/35 R 24 XL	112	1120	10 J	316			
			10 ½ J	321			
			11 J	326	832	388	2513
			11 ½ J 12 J	331 336			
315/35 R 24 XL	114	1180	10 ½ J	328			
			11 J	333	838	391	2532
			11 ½ J 12 J 12 ½ J	338 343 348			
30 series							
255/30 R 18 XL	90	600	8 ½ J	265			
			9 J	270	617	289	1864
			9 ½ J	275			
285/30 R 18	93	650	9 ½ J	297			
			10 J	302	635	296	1918
			10 ½ J	307			
295/30 R 18	94	670	10 J	308			
295/30 R 18 XL	98	750	10 ½ J	313	643	298	1937
			11 J	318			
245/30 R 19 XL	89	580	8 J	253			
			8 ½ J	258	637	299	1925
			9 J	263			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)		
	LI	kg					
30 series							
255/30 R 19 XL	91	615	8 ½ J	265			
			9 J	270	643	302	1943
265/30 R 19 XL	93	650	9 ½ J	275			
			9 ½ J	282	649	304	1961
			10 J	287			
275/30 R 19 XL	96	710	9 J	284			
			9 ½ J	289	655	306	1979
			10 J	294			
285/30 R 19 XL	98	750	9 ½ J	297			
			10 J	302	661	309	1998
			10 ½ J	307			
295/30 R 19	96	710	10 J	308			
295/30 R 19 XL	100	800	10 ½ J	313	669	311	2016
			11 J	318			
305/30 R 19 XL	102	850	10 ½ J	321			
			11 J	326	675	313	2034
			11 ½ J	331			
325/30 R 19 XL	105	925	11 J	339			
			11 ½ J	344	687	318	2071
			12 J	349			
235/30 R 20 XL	88	560	8 ½ J	251	656	309	1983
245/30 R 20 XL	90	600	8 J	253			
			8 ½ J	258	662	312	2001
			9 J	263			
255/30 R 20 XL	92	630	8 ½ J	265			
			9 J	270	668	314	2019
			9 ½ J	275			
265/30 R 20 XL	94	670	9 J	277			
			9 ½ J	282	674	316	2037
			10 J	287			
275/30 R 20 XL	97	730	9 J	284			
			9 ½ J	289	680	319	2056
			10 J	294			
285/30 R 20 XL	99	775	9 ½ J	297			
			10 J	302	686	321	2074
			10 ½ J	307			
295/30 R 20 XL	101	825	10 J	308			
			10 ½ J	313	694	323	2092
			11 J	318			
305/30 R 20 XL	103	875	10 ½ J	321			
			11 J	326	700	326	2111
			11 ½ J	331			
335/30 R 20 XL	108	1000	11 ½ J	352			
			12 J	357	718	333	2166
			12 ½ J	362			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
30 series							
245/30 R 21 XL	91	615	8 J	253			
			8 ½ J	258	687	324	2077
			9 J	263			
255/30 R 21 XL	93	650	8 ½ J	265			
			9 J	270	693	327	2095
			9 ½ J	275			
265/30 R 21 XL	96	710	9 J	277			
			9 ½ J	282	699	329	2114
			10 J	287			
275/30 R 21 XL	98	750	9 J	284			
			9 ½ J	289	705	331	2132
			10 J	294			
285/30 R 21 XL	100	800	9 ½ J	297			
			10 J	302	711	334	2150
			10 ½ J	307			
295/30 R 21 XL	102	850	10 J	308			
			10 ½ J	313	719	336	2169
			11 J	318			
315/30 R 21 XL	105	925	10 ½ J	328			
			11 J	333	731	341	2205
			11 ½ J	338			
325/30 R 21 XL	108	1000	11 J	339			
			11 ½ J	344	737	343	2223
			12 J	349			
265/30 R 22 XL	97	730	9 J	277			
			9 ½ J	282	725	342	2193
			10 J	287			
285/30 R 22 XL	101	825	9 ½ J	297			
			10 J	302	737	347	2230
			10 ½ J	307			
295/30 R 22 XL	103	875	10 J	308			
			10 ½ J	313	745	349	2248
			11 J	318			
315/30 R 22 XL	107	975	10 ½ J	328			
			11 J	333	757	354	2284
			11 ½ J	338			
305/30 R 23 XL	105	925	10 ½ J	321			
			11 J	326	776	364	2342
			11 ½ J	331			
335/30 R 23 XL	111	1090	11 ½ J	352			
			12 J	357	794	371	2397
			12 ½ J	362			

Tyre			Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
Size	Load Index	Load capacity		Width (mm)	Outer-Ø (mm)	stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)
	LI	kg					
25 series							
315/25 R 19 XL	98	750	11 J	333			
			11 ½ J	338	647	303	1955
			12 J	343			
285/25 R 20 XL	93	650	10 ½ J	307	656	309	1983
295/25 R 20 XL	95	690	10 J	308			
			10 ½ J	313	662	312	2001
			11 J	318			
305/25 R 20 XL	97	730	10 ½ J	321			
			11 J	326	666	313	2013
			11 ½ J	331			
325/25 R 20 XL	101	825	11 ½ J	344			
			12 J	349	676	317	2044
			12 ½ J	355			
275/25 R 21 XL	92	630	10 J	294	677	320	2047
295/25 R 21 XL	96	710	10 J	308			
			10 ½ J	313	687	324	2077
			11 J	318			
305/25 R 21 XL	98	750	10 ½ J	321			
			11 J	326	691	326	2089
			11 ½ J	331			
325/25 R 21 XL	102	850	11 ½ J	344			
			12 J	349	701	330	2120
			12 ½ J	354			
305/25 R 22 XL	99	775	10 ½ J	320			
			11 J	326	717	339	2169
			11 ½ J	331			
335/25 R 22 XL	105	925	11 ½ J	351			
			12 J	357	733	345	2217
			12 ½ J	362			
315/25 R 23 XL	102	850	11 J	333			
			11 ½ J	338	748	354	2263
			12 J	343			

Tyre			Tyre dimensions				
Size	Load Range	Load Index	Max. standard value in operation ²⁾			New tire on measuring rim	
			Permitted rims ¹⁾ (measuring rim bold)	Width (mm)	Outer-Ø (mm)	Width (mm)	
LR ³⁾	LI ³⁾						
LT sizes							
15 inch							
LT 215/80 R 15	LRE	112/109	5 ½J, 6J , 6 ½J, 7J	229	739	216	
LT 215/75 R 15	LRD	106/103	5 ½J, 6J , 6 ½J, 7J	229	715	216	
LT 235/75 R 15	LRD	110/107	6J, 6 ½J , 7J	249	747	235	
LT 245/75 R 15	LRD	113/110	6 ½J, 7J , 7 ½J	263	763	248	
LT 205/70 R 15	LRE	107/103	5J, 5 ½J, 6J , 6 ½J, 7J	222	681	209	
16 inch							
LT 215/85 R 16	LRE	115/112	5 ½J, 6J , 6 ½J, 7J	229	786	216	
LT 235/85 R 16	LRE	120/116	6J, 6 ½J , 7J, 7 ½J	249	822	235	
LT 225/75 R 16	LRD	110/107	6J , 6 ½J, 7J	236	758	223	
	LRE	115/112					
LT 245/75 R 16	LRE	120/116	6 ½J, 7J , 7 ½J, 8J	263	788	248	
LT 265/75 R 16	LRE	123/120	7J, 7 ½J , 8J	283	820	267	
LT 285/75 R 16	LRD	122/119	7 ½J, 8J , 8 ½J, 9J	303	852	286	
	LRE	126/123					
LT 295/75 R 16	LRD	123/120	7 ½J, 8J , 8 ½J, 9J, 9 ½J	312	866	294	
LT 315/75 R 16	LRD	121	8J, 8 ½J , 9J, 9 ½J, 10J, 10 ½J, 11J	332	896	313	
	LRE	127/124					
LT 235/70 R16	LRD	110/107	6J, 6 ½J, 7J , 7 ½J	254	750	240	
LT 245/70 R16	LRD	113/110	6 ½J, 7J , 7 ½J	263	764	248	
LT 255/70 R16	LRE	120/117	6 ½J, 7J, 7 ½J , 8J	276	778	260	
LT 265/70 R16	LRE	121/118	7J, 7 ½J, 8J , 8 ½J	288	792	272	

** Load Range, standardized according to TRA (Tire and Rim Association, USA).
Classifies the max. load capacity of a tyre, corresponding PR.
LR B equals 4 PR, LR C - 6 PR, LR D - 8 PR, LR E - 10 PR.

	Rolling circum- ference	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)						
				2.5	3.0	3.5	4.0	4.5	5.0	5.5
		LI								
	2197	112 109	S T	1300 2360	1480 2700	1650 3000	1810 3300	1950 3500	2120 3860	2240 4120
	2130	106 103	S T	1250 2280	1420 2580	1600 2920	1740 3160	1900 3500		
	2253	110 107	S T	1420 2580	1620 2940	1800 3300	1980 3600	2120 3900		
	2269	113 110	S T	1520 2760	1730 3140	1950 3500	2120 3860	2300 4240		
	2027	107 103	S T	1120 2040	1270 2320	1420 2600	1550 2820	1700 3100	1820 3320	1950 3500
	2339	115 112	S T	1390 2520	1580 2880	1760 3200	1930 3480	2120 3900	2260 4120	2430 4480
	2478	120 116	S T	1580 2880	1800 3280	2000 3640	2200 4000	2380 4320	2580 4680	2760 5040
	2254	110 107	S T	1400 2540	1590 2900	1760 3200	1940 3540	2120 3900		
		115 112	S T	1400 2540	1590 2900	1760 3200	1940 3540	2120 3900	2280 4160	2430 4480
	2345	120 116	S T	1580 2880	1800 3280	2000 3640	2200 4000	2380 4320	2580 4680	2760 5040
	2472	123 120	S T	1780 3240	2020 3680	2240 4120	2480 4520	2720 5000	2880 5240	3100 5600
	2527	122 119	S T	1980 3600	2260 4120	2500 4600	2760 5040	3000 5440		
		126 123	S T	1980 3600	2260 4120	2500 4600	2760 5040	3000 5440	3220 5880	3400 6200
	2569	123 120	S T	2080 3780	2360 4280	2640 4860	2900 5280	3100 5600		
	2660	121	S	2300	2620	2900				
		127	S	2300	2620	2900	3200	3500		
		124	T	4240	4760	5280	5840	6400		
	2230	110 107	S T	1420 2580	1610 2940	1800 3300	1970 3580	2120 3900		
	2273	113 110	S T	1510 2740	1710 3120	1900 3500	2100 3820	2300 4240		
	2330	120 117	S T	1600 2920	1820 3320	2000 3600	2220 4040	2450 4480	2600 4720	2800 5140
	2357	121 118	S T	1690 3080	1920 3500	2120 3900	2360 4280	2570 4720	2740 5000	2900 5280

Tyre			Tyre dimensions				
Size	Load Range	Load Index	Max. standard value in operation ²⁾			New tire on measuring rim	
	LR ¹⁾	LI ¹⁾	Permitted rims ¹⁾ (measuring rim bold)	Width (mm)	Outer-Ø (mm)	Width (mm)	
LT sizes							
16 inch							
LT 305/70 R 16	LRD	118/115	8J, 8 ½J, 9J , 9 ½J	330	852	311	
	LRE	124/121					
LT 215/65 R 16	LRD	103/100	6J, 6 ½J , 7J	234	698	221	
17 inch							
LT 235/80 R 17	LRE	120/117	6J, 6 ½J , 7J, 7 ½J	249	824	235	
LT 245/75 R 17	LRE	121/118	6 ½J, 7J , 7 ½J	263	814	248	
LT 245/70 R 17	LRE	119/116	6 ½J, 7J, 7 ½J , 8J	263	790	248	
LT 265/70 R 17	LRE	121/118	7J, 7 ½J, 8J , 8 ½J	288	818	272	
LT 285/70 R 17	LRE	121/118	7 ½J, 8J, 8 ½J , 9J	310	848	292	
LT 255/65 R17	LRD	114/110	7J, 7 ½J , 8J, 8 ½J, 9J	276	778	260	
LT 265/65 R17	LRE	120/117	7 ½J, 8J , 8 ½J, 9J, 9 ½J	288	790	272	
18 inch							
LT 275/70 R 18	LRE	125/122	7J, 7 ½J, 8J , 8 ½J	296	859	279	
LT 265/60 R 18	LRE	119/116	7 ½J, 8J , 8 ½J, 9J, 9 ½J	288	787	272	
LT 285/60 R 18	LRE	122/119	8J, 8 ½J , 9J, 9 ½J, 10J	310	813	292	
LT flotation-sizes							
15 inch							
30 x 9.50 R 15 LT	LRC	104	6 ½ J, 7J, 7 ½J , 8J, 8 ½J	260	765	240	
31 x 10.50 R 15 LT	LRC	109	7J, 7 ½J, 8J, 8 ½J , 9J	289	791	268	
33 x 12.50 R 15 LT	LRC	108	8½ J, 9J, 9 ½J, 10J , 10 ½J, 11J	343	844	318	
35 x 12.50 R 15 LT	LRC	113	8½ J, 9J, 9 ½J, 10J , 10 ½J, 11J	343	897	318	
17 inch							
33 x 12.50 R 17 LT	LRC	105	8½ J, 9J, 9 ½J, 10J , 10 ½J, 11J	343	842	318	
	LRD	114					
37 x 12.50 R 17 LT	LRC	116	8½ J, 9J, 9 ½J, 10J , 10 ½J, 11J	343	947	318	
18 inch							
35 x 12.50 R 18 LT	LRD	118	8½ J, 9J, 9 ½J, 10J , 10 ½J, 11J	343	894	318	
	LRE	123					

** Load Range, standardized according to TRA (Tire and Rim Association, USA).
 Classifies the max. load capacity of a tyre, corresponding PR.
 LR B equals 4 PR, LR C - 6 PR, LR D - 8 PR, LR E - 10 PR.

	Rolling circum- ference	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)								
				2.5	3.0	3.5	4.0	4.5	5.0	5.5		
	2527	118	S	2060	2380	2640						
		115	T	3700	4320	4860						
		124	S	2060	2380	2640	2900	3200				
		121	T	3700	4320	4860	5280	5800				
	2079	103	S	1160	1330	1500	1630	1750				
		100	T	2120	2420	2760	2960	3200				
	2448	120	S	1600	1820	2060	2220	2430	2600	2800		
		117	T	2920	3320	3700	4040	4480	4720	5140		
	2424	121	S	1650	1870	2060	2280	2500	2680	2900		
		118	T	3000	3400	3700	4160	4600	4880	5280		
	2351	119	S	1570	1780	2000	2180	2360	2540	2720		
		116	T	2860	3240	3600	3960	4240	4640	5000		
	2470	121	S	1760	2000	2240	2440	2640	2780	2900		
		118	T	3200	3640	4120	4440	4860	5040	5280		
	2521	121	S	1960	2220	2500	2700	2900				
		118	T	3560	4040	4600	4920	5280				
	2315	114	S	1550	1770	1950	2160	2360				
		110	T	2820	3220	3500	3940	4240				
	2367	120	S	1640	1860	2060	2280	2500	2660	2800		
		117	T	2980	3380	3700	4160	4600	4840	5140		
	2554	125	S	1920	2180	2430	2680	2900	3120	3300		
		122	T	3500	3960	4480	4880	5280	5680	6000		
	2348	119	S	1600	1790	2000	2200	2360	2560	2720		
		116	T	2920	3260	3600	4000	4240	4640	5000		
	2421	122	S	1750	1990	2240	2440	2640	2840	3000		
		119	T	3180	3620	4120	4440	4860	5160	5440		
				1.7	2.1	2.5	2.8	3.1	3.5	3.8	4.1	4.5
		104	S	1120	1280	1420	1560	1680	1800			
		109	S	1270	1450	1600	1760	1910	2060			
		108	S	1600	1810	2000						
		113	S	1850	2080	2300						
		105	S	1460	1680	1850						
		114	S	1460	1680	1850	2050	2210	2360			
		116	S	1950	2240	2500						
		118	S	1650	1880	2120	2300	2480	2640			
		123	S	1650	1880	2120	2300	2480	2640	2830	2990	3100

CST 17

CST = Conti Spare Tyre



The space- and weight-saving spare tyre in radial design for temporary, limited use. Approved for speeds of up to 80 km/h / 50 mph *)

This tyre may only be used in an emergency on one wheel of the vehicle with the agreement of the vehicle manufacturer. The T in the tyre designation indicates temporary use under restricted conditions.

*) According to UN / ECE-Regulation 64 governing the use of special spare tyres, those with a higher speed rating may also only be used up to a maximum speed of 80 km/h / 50 mph.

Technical data Special spare tyres for temporary use

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity ⁷⁾ kg		Width (mm)	Outer-Ø (mm)		
95 series							
T 115/95 R 17	95	690	3 J ⁵⁾	118	658	298	1996
			3 ½ J ⁵⁾	122			
			4 J ⁵⁾	128			
90 series							
T 125/90 R 15	96	710	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	617	275	1863
			4 J ⁵⁾	136			
T 115/90 R 16	92	630	3 J ⁵⁾	118	622	281	1885
			3 ½ J ⁵⁾	123			
			4 J ⁵⁾	128			
T 125/90 R 16	98	750	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	642	288	1940
			4 J ⁵⁾	136			
T 135/90 R 16	102	850	3 ½ J ⁵⁾	138	660	294	1996
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/90 R 16	106	950	3 ½ J	146			
			4 J	151	678	301	2051
			4 ½ J	156			
			5 J	161			

*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN / ECE regulation 64.

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius	Rolling circumference ³⁾
	Load Index	Load capacity ¹⁾		stat. + / – 2 % (mm)	+ 1.5 % – 2.5 % (mm)		
						Width (mm)	Outer-Ø (mm)
LI	kg						
90 series							
T 135/90 R 17	104	900	3 ½ J ⁵⁾	138	686	307	2075
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 165/90 R 17	105	925	4 J ⁵⁾	167			
			4 ½ J	172	742	329	2241
			5 J	177			
5 ½ J	182						
T 155/90 R 18	113	1150	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	749	333	2263
			5 J ⁵⁾	168			
85 series							
T 125/85 R 16	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	626	283	1897
			4 J ⁵⁾	136			
T 145/85 R 18	103	875	3 ½ J ⁵⁾	146			
			4 J ⁵⁾	151	713	321	2158
			4 ½ J	156			
5 J ⁵⁾	161						
T 155/85 R 18	115	1215	4 J	158			
			4 ½ J	163	731	327	2213
			5 J	168			
80 series							
T 125/80 R 15	95	690	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	589	266	1784
			4 J ⁵⁾	136			
T 125/80 R 16	97	730	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	614	278	1860
			4 J ⁵⁾	136			
T 125/80 R 17	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	640	291	1940
			4 J ⁵⁾	136			
T 135/80 R 17	102	850	3 ½ J ⁵⁾	138	656	297	1989
	103	875	4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/80 R 17	107	975	3 ½ J	146			
			4 J	151	674	303	2038
			4 ½ J	156			
5 J	161						
T 165/80 R 17	104	900	4 J	167			
			4 ½ J	172	706	315	2137
			5 J	177			
5 ½ J	182						

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / – 2 % (mm)	Rolling circumference ³⁾ + 1.5 % – 2.5 % (mm)
	Load Index	Load capacity ¹⁾ kg		Width (mm)	Outer-Ø (mm)		
	LI						
80 series							
T 135/80 R 18	104	900	3 ½ J ⁵⁾	138	681	310	2066
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/80 R 18	99	775	3 ½ J	146			
			4 J	151	699	316	2115
			4 ½ J	156			
			5 J	161			
T 145/80 R 19	110	1060	3 ½ J	146			
			4 J	151	725	328	2195
			4 ½ J	156			
			5 J	161			
T 155/80 R 19	114	1180	4 J	158			
			4 ½ J	163	741	334	2244
			5 J	168			
T 175/80 R 19	122	1500	4 ½ J	179			
			5 J	184	775	346	2342
			5 ½ J	189			
			6 J	194			
70 series							
T 115/70 R 15	90	600	3 J ⁵⁾	118			
			3 ½ J ⁵⁾	123	549	251	1667
			4 J ⁵⁾	128			
T 125/70 R 15	95	690	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	565	256	1710
			4 J ⁵⁾	136			
T 135/70 R 15	99	775	3 ½ J ⁵⁾	139			
			4 J ⁵⁾	144	579	261	1753
			4 ½ J ⁵⁾	149			
T 115/70 R 16	92	630	3 J ⁵⁾	118			
			3 ½ J ⁵⁾	123	574	264	1744
			4 J ⁵⁾	128			
T 125/70 R 16	96	710	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	590	269	1787
			4 J ⁵⁾	136			
T 135/70 R 16	100	800	3 ½ J ⁵⁾	139			
			4 J ⁵⁾	144	604	274	1830
			4 ½ J ⁵⁾	149			
T 125/70 R 17	98	750	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	616	282	1867
			4 J ⁵⁾	136			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / – 2 % (mm)	Rolling circumference ³⁾ + 1.5 % – 2.5 % (mm)
	Load Index	Load capacity ⁷⁾ kg		Width (mm)	Outer-Ø (mm)		
70 series							
T 145/70 R 17	107	975	3 ½ J ⁵⁾	146			
			4 J ⁵⁾	151			
			4 ½ J ⁵⁾	156	644	292	1953
			5 J ⁵⁾	161			
T 155/70 R 17	110	1060	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	658	297	1996
			5 J ⁵⁾	168			
T 125/70 R 18	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	641	294	1943
			4 J ⁵⁾	136			
T 125/70 R 19	100	800	3 J	126			
			3 ½ J	131	667	307	2023
			4 J	136			
T 155/70 R 19	113	1150	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	709	323	2152
			5 J ⁵⁾	168			
65 series							
T 145/65 R 20	105	925	4 J ⁵⁾	151			
			4 ½ J ⁵⁾	156	704	328	2123
			5 J	161			
			5 ½ J	166			
60 series							
T 125/60 R 18	94	670	3 ½ J	131	613	285	1863
			4 J	136			
			4 ½ J	141			
T 155/60 R 18	107	975	4 ½ J ⁵⁾	163	651	298	1974
			5 J ⁵⁾	168			
			5 ½ J ⁵⁾	173			
T 145/60 R 20	105	925	4 J	151			
			4 ½ J	156	688	319	2094
			5 J	161			
T 165/60 R 20	113	1150	4 ½ J	172	712	328	2167
			5 J	177			
			5 ½ J	182			
			6 J	187			

The ContiMobilityKit for extended movability.

The ContiMobilityKit is a convenient repair kit, designed to seal punctures in the tyre tread caused by nails or similar objects with a diameter of up to 6 mm.

The kit consists of a compact compressor and a separate sealant bottle and has a shelf life of up

Easy-to-use repair kit for sealing and reinflating a punctured tyre

- › Ensuring an unaltered driving performance for another 200 km (125 miles) at a maximum speed of 80 km/h (50 mph)
- › Original equipment quality 'Engineered in Germany'
- › Non-hazardous latex-based tyre sealant

Product contents:

- › Compressor
- › Pressure-resistant tyre sealant bottle
- › User manual
- › Bag
- › Gloves

to 5 years. In case of a puncture, an emergency roadside tyre change is not necessary and the journey can be continued for another 200 km (125 miles) at a maximum speed of 80 km/h (50 mph). It's not even necessary to remove and replace the valve core – after just a few steps you are ready to go again.

The ContiMobilityKit is only suitable for passenger car tyres with a mandatory maximum tyre pressure of 3 bar.

Technical specifications of compressor:

Amperage	Voltage	Maximum pressure
Max. 10 A according to DIN ISO 8820	12 V	700 kPa (7 bar, 102 psi)
Dimensions (mm)	Weight	Area of application
150 × 130 × 60	650 g	-30 °C up to +60 °C

Technical specifications of sealant bottle:

Sealant amount	Shelf life	Dimensions (mm)
450 ml	5 Jahre	Ø 87 x 125
Weight	Application temperature	
585 g	- 30°C up to + 60°C	



Suitable for many passenger car tyres. For a detailed list of tyre sizes see www.continental-mobility.com

Spare parts for the ContiMobilityKit: the tyre sealant.

The tyre sealant is pumped by the Continental compressor into the tyre, enabling the onward journey to the nearest garage or tyre service (max. 80 km/h / 50 mph and max. 200 km / 125 miles). It seals car tyre punctures caused by nails or similar objects with a diameter of up to 6 mm.



- › Non-hazardous latex-based tyre sealant
- › Extended shelf life of up to five years
- › Sealant bottle can be disposed of in household waste
- › No need to remove and replace valve core

Product contents:

- › Pressure-resistant 450 ml tyre sealant bottle

Technical specifications of sealant bottle:

Sealant amount	Shelf life	Dimensions (mm)
450 ml	5 years	Ø 87 x 125
Weight	Application temperature	
585 g	- 30°C up to + 60°C	

Spare parts for the ContiMobilityKit: the exchange hose. After usage of the ContiMobilityKit, the hose needs to be replaced due to residue of sealant in the hose.

Product contents:

- › 50 cm hose including bottle connection for the ContiMobilityKit sealant bottle
- › Exchange manual
- › Plastic gloves
- › Speed warning label
- › Small plastic bag with screws



Technical specifications of exchange hose:

Hose length
50 cm

The ContiTireSealant. This squeeze bottle can be used as a replacement for similar products from other manufacturers. ContiTireSealant restores mobility in case of punctures - quickly and safely. The tyre sealant is transferred with a squeeze bottle into the tyre. The tyre can then be inflated again with any standard compressor for tyre puncture sealing, enabling the onward journey to the nearest garage or tyre service (max. 80 km/h / 50 mph and max. 200 km / 125 miles). ContiTireSealant seals passenger car tyre punctures caused by nails or similar objects with a diameter of up to 6 mm.

- › This squeeze bottle can be used as a replacement for similar products from other manufacturers with any standard compressor for tyre puncture sealing

Product contents:

- › 600 ml squeeze bottle
- › User manual
- › Plastic gloves
- › Nozzle
- › Small bag with valve core remover, valve core and speed warning label



Technical specifications of sealant bottle:

Sealant amount	Shelf life	Dimensions (mm)
600 ml	5 years	Ø 86 x 150
Weight	Application temperature	
640 g	- 30°C up to + 60°C	

Transporter- and Van tyres

ContiVanContact™ 100

For transporters and vans

- › High level of efficiency thanks to higher mileage
- › Improved durability on all roads and thus longer service life
- › High safety reserves for heavy loads



Tyre dimensions^{*)}

Tyre width in mm **165-235**

Rim size in inches **14-17**

Speed Symbol **Q/R/S/T/H**

Tyre cross-section **series 55-80**

Load Index **89-131**

ContiVanContact™ 200

For transporters and vans

- › Safe journey thanks to shorter braking distances on wet roads
- › Considerably reduced rolling resistance for lower fuel consumption and greater efficiency
- › Safe handling in all situations, even under heavy loads



Tyre dimensions^{*)}

Tyre width in mm **185-235**

Rim size in inches **15-17**

Speed Symbol **R/T/H/V**

Tyre cross-section **series 55-75**

Load Index **95-121**

Vanco™ 2

For transporters and vans

- › Perceptible car-orientated handling
- › Excellent wet braking performance
- › Outstanding protection against aquaplaning

Tyre dimensions^{*)}

Tyre width in mm **175-235**

Rim size in inches **14-17**

Speed Symbol **P / Q / R / T**

Tyre cross-section **series 60-80**

Load Index **100-121**

Vanco™ Contact 2

For transporters and vans

- › Outstanding handling
- › Precise braking reaction and reduced stopping distance
- › Excellent protection against aquaplaning

Tyre dimensions^{*)}

Tyre width in mm **165-225**

Rim size in inches **13-16**

Speed Symbol **R / T / H**

Tyre cross-section **series 60-70**

Load Index **88-105**

Transporter- and Van tyres

Vanco™ Eco

For transporters and vans

- › Cost-effective due to optimised rolling resistance
- › Short braking distances, even on wet surfaces
- › Perceptible car-like handling

Tyre dimensions^{*)}

Tyre width in mm **195-235**

Rim size in inches **16**

Speed Symbol **R / T**

Tyre cross-section **series 60-75**

Load Index **107-118**



New!

VanContact™ Camper

For campers and mobile homes

- › A robust construction boosts safety during temporarily increased loads according to CP standards
- › Excellent handling and braking on dry roads
- › High braking performance on wet, muddy and snowy roads

Tyre dimensions^{*)}


Tyre width in mm **195-255**

Rim size in inches **15-18**

Speed Symbol **R**

Tyre cross-section **series 55-75**

Load Index **118-120**



VanContact™ Winter

For vans, transporters and mobile homes

- › Shorter braking distances and improved traction on snow
- › High aquaplaning safety and shorter braking distances on wet roads
- › Improved rolling resistance



Tyre dimensions^{*)}

Tyre width in mm **165-235**

Rim size in inches **14-17**

Speed Symbol **Q / R / T / H**

Tyre cross-section **series 55-80**

Load Index **89/87-131**

Vanco™ Winter 2

For vans, transporters and mobile homes

- › Optimised braking effect on snow and ice
- › Car-orientated handling on snow
- › Excellent resistance to aquaplaning and safe wet handling



Tyre dimensions^{*)}

Tyre width in mm **195-235**

Rim size in inches **14-17**

Speed Symbol **Q / R / T**

Tyre cross-section **series 55-80**

Load Index **97-118/116**



The Alpine symbol identifies winter tyres according to UNECE regulations (valid in the EU and various other countries) and the tyre regulations of the USA and Canada. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow, on icy roads and in general at low temperatures.

M+S

'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

Transporter- and Van tyres

VanContact™ 4Season

For vans, transporters and mobile homes

- › All-year efficiency due to reduced fuel consumption
- › High braking performance on wet, muddy and snowy roads
- › Excellent handling and braking on dry roads



M+S



Tyre dimensions^{*)}

Tyre width in mm **185-235**

Rim size in inches **14-16**

Speed Symbol **R / T / H**

Tyre cross-section **series 60-80**

Load Index **99-121**



The Alpine symbol identifies winter tyres according to UNECE regulations (valid in the EU and various other countries) and the tyre regulations of the USA and Canada. The snow performance of these winter tyres has to be proven by objective tests and meet or exceed defined limits. These tyres provide high performance with regards to safety and control on snow, on icy roads and in general at low temperatures

M+S 'Snow tyre' means a tyre whose tread pattern, tread compound or structure is primarily designed to perform better in snow conditions than a normal tyre with regard to its ability to initiate or maintain vehicle motion.

Size	Tyre		Service description ⁶⁾	Rim ⁷⁾ (meas- uring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / – 2 % (mm)	Rolling circum- ference + 1.5 % – 2.5 % (mm)	
	PR					Max. standard value in operation ⁸⁾								
						Width Stand- ard	Outer-Ø Spec- ial							
13 inch														
165 R 13 C	6	91/89 R	4 J	43 GS 11.5	167	175	604	609	162	596	273	1806		
			4 ½ J		172	180			167					
			5 J		177	185			172					
165/70 R 13 C	6	88/86 R	4 ½ J ⁵⁾ 5 J	43 GS 11.5	172 177		572	576	165 170	562	258	1703		
14 inch														
175 R 14 C	8	99/98 P	4 ½ J	43 GS 11.5	178	187	642	648	173	634	293	1921		
		99/98 Q	5 J 5 ½ J		183 188	192 197			178 183					
185 R 14 C	6	102/100 Q	5 J	43 GS 11.5	189	198	659	665	183	650	299	1970		
	8	102/100 R	5 ½ J 6 J		194 199	203 208			188 193					
195 R 14 C	8	106/104 Q	5 J	43 GS 11.5	199	209	675	682	193	666	306	2018		
		106/104 R	5 ½ J 6 J		204 209	214 219			198 203					
205 R 14 C	8	109/107 P	5 ½ J 6 J 6 ½ J	43 GS 11.5	209 214 219	220 225 230	696	703	203 208 213	686	312	2079		
215 R 14 C	8	112/110 P	5 ½ J 6 J 6 ½ J	(43 GS 11.5)	220 225 230	230 235 240	710	717	213 218 223	700	319	2121		
165/75 R 14 C	8	97/95 R	4 J 4 ½ J 5 J	TR 600 XHP, TR 602 HP	167 172 177		614	618	160 165 170	604	277	1830		
185/75 R 14 C	8	102/100 Q	5 J 5 ½ J 6 J	TR 600 XHP, TR 602 HP	191 196 201		646	–	184 189 194	634	289	1921		
195/75 R 14 C	8	106/104 Q	5 J 5 ½ J 6 J	TR 600 XHP, TR 602 HP	199 204 209		666	–	191 196 201	648	295	1963		
165/70 R 14 C	6	89/87 R	4 ½ J 5 J	43 GS 11.5	172 177		598	602	165 170	588	270	1782		
175/70 R 14 C	6	95/93 T	4 ½ J 5 J 5 ½ J	43 GS 11.5	179 184 189		612	616	172 177 182	602	276	1824		

*) 43 GS 11.5 are snap-in valves approved for up to 4.5 bar.
38 G 11.5 is a valve for the hose.
Standard rubber valves are only approved for up to 4.5 bar **in service**.
TR 600 XHP and TR 602 HP (ETRTO V3.23.1+2) are reinforced snap-in valves approved for up to 5.5 bar.
40 MS (ETRTO V2.04.1, V2.05.1) are metal valves approved for pressures up to 6 bar and higher.

	PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed
		LI		3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	(km/h)	
	6	91 89	S T	1030 1940	1095 2070	1165 2195	1230 2320										R 170	
	6	88 86	S T	935 1775	1000 1890	1060 2005	1120 2120										R 170	
	8	99 98	S T	1120 2170	1195 2310	1270 2450	1340 2590	1410 2730	1480 2865	1550 3000							P 150 Q 160	
	8	102 100	S T	1230 2315	1310 2465	1390 2620	1470 2765	1545 2915	1625 3060	1700 3200							Q 160 R 170	
	8	106 104	S T	1375 2605	1465 2775	1555 2945	1645 3110	1730 3275	1815 3440	1900 3600							Q 160 R 170	
	8	109 107	S T	1490 2820	1590 3005	1685 3190	1780 3370	1875 3550	1970 3725	2060 3900							P 150	
	8	112 110	S T	1620 3065	1725 3270	1830 3470	1935 3665	2040 3860	2140 4050	2240 4240							P 150	
	8	97 95	S T	1010 1910	1080 2035	1145 2160	1210 2285	1270 2405	1335 2525	1400 2645	1460 2760						R 170	
	8	102 100	S T	1175 2215	1255 2360	1330 2505	1405 2650	1480 2790	1555 2930	1630 3065	1700 3200						Q 160	
	8	106 104	S T	1315 2495	1405 2655	1490 2820	1575 2980	1655 3140	1740 3295	1820 3450	1900 3600						Q 160	
	6	89 87	S T	970 1825	1035 1945	1100 2065	1160 2180										R 170	
	6	95 93	S T	1150 2175	1230 2315	1305 2460	1380 2600										T 190	

Size	Tyre		Service description ⁶⁾	Rim ⁷⁾ (meas- uring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circum- ference + 1.5 % - 2.5 % (mm)	
	PR					Max. standard value in operation ⁸⁾		Outer-Ø		Width	Outer- Ø			
						Stand- ard	Spe- cial	Stand- ard	Spe- cial					
14 inch														
195/70 R 14 C	8	101/99 R (104 N)	5 J 5 ½ J 6 J			199 204 209		640 646	191 196 201	630	287	1909		
175/65 R 14 C	6	90/88 T	5 J 5 ½ J	43 GS 11.5		186 191	594	598	177 182	584	269	1770		
15 inch														
185 R 15 C	8	103/102 R	5 J 5 ½ J 6 J	43 GS 11.5		189 194 199	198 203 208	683 689	183 188 193	674	312	2042		
195 R 15 C	8	106/104 S 106/104 R	5 J 5 ½ J 6 J	43 GS 11.5		201 206 211		703 —	193 198 203	690	318	2091		
215/80 R 15 C	8	111/109 S	5 ½ J 6 J 6 ½ J 7 J			220 225 230 235		739 745	211 216 221 216	725	328	2197		
245/75 R 15 C	6	109/107 S	6 ½ J 7 J 7 ½ J			253 258 263		763 771	248	749	338	2269		
195/70 R 15 C	6 8	100/98 R (97 T) 104/102 Q (100 R) 104/102 R (97 T) 104/102 S	5 J 5 ½ J 6 J	43 GS 11.5		199 204 209		665 671	191 196 201	655	300	1985		
205/70 R 15 C	8	106/104 R	5 ½ J 6 J 6 ½ J	43 GS 11.5		212 217 222		681 687	204 209 214	669	305	2027		
215/70 R 15 C	8	109/107 R 109/107 S	5 ½ J 6 J 6 ½ J 7 J	43 GS 11.5 TR 600 XHP, TR 600 HP		220 225 230 235		695 701	211 216 221 226	683	311	2069		
215/70 R 15 CP	8	109 R		TR 600 XHP, TR 602 HP, 40 MS										
225/70 R 15 C	6 8	109/107 R 112/110 R 112/110 R (115 N)	6 J 6 ½ J 7 J	43 GS 11.5		232 237 242		709 715	223 228 233	697	317	2112		

	PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed (km/h)
				3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0		
	8	101 99 104	S T S	1140 2145 1150	1220 2290 1225	1290 2430 1300	1365 2565 1375	1440 2700 1450	1510 2835 1520	1580 2970 1590	1650 3100 1660						R 170 (N 140)	
	6	90 88	S T	1005 1875	1070 2000	1135 2120	1200 2240										T 190	
	8	103 102	S T	1265 2460	1350 2620	1435 2780	1515 2940	1595 3095	1675 3250	1750 3400							R 170	
	8	106 104	S T	1375 2605	1465 2775	1555 2945	1645 3110	1730 3275	1815 3440	1900 3600							R 170 S 180	
	8	111 109	S T	1510 2855	1610 3040	1705 3225	1805 3410	1900 3590	1995 3770	2090 3945	2180 4120						S 180	
	6	109 107	S T	1725 3260	1835 3480	1950 3690	2060 3900										S 180	
	6	100 98 97	S T S	1340 2510 1220	1425 2675 1300	1515 2840 1380	1600 3000 1460										Q 160 R 170 S 180 (T 190)	
	8	104 102 97 100	S T S S	1300 2460 1220 1340	1385 2620 1300 1430	1470 2780 1380 1480	1555 2940 1460 1600	1640 3095	1720 3250	1800 3400								
	8	106 104	S T	1375 2605	1465 2775	1555 2945	1640 3110	1730 3275	1815 3440	1900 3600							R 170	
	8	109 107	S T	1490 2820	1590 3005	1685 3190	1780 3370	1875 3550	1970 3725	2060 3900							R 170 S 180	
	8	109 109 1.85x109	FA S RA S RA T	1425 1270 2640	1520 1350 2810	1615 1435 2985	1705 1516 3155	1795 1595 3320	1885 1675 3485	1975 1755 3650	2060 1830 3810	1910	1985	2060				
	6	109 107	S T	1725 3260	1835 3480	1950 3690	2060 3900										R 170 (N 140)	
	8	112 110 115	S T S	1620 3065 1680	1725 3270 1790	1830 3470 1900	1935 3665 2010	2040 3860 2115	2140 4050 2220	2240 4240 2325	2430							

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / – 2 % (mm)	Rolling circum- ference + 1.5 % – 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾								
					Width		Outer-Ø		Width	Outer-Ø			
				Stand- ard	Spe- cial	Stand- ard	Spe- cial						
15 inch													
185/65 R 15 C	6	97/95 T	5 J 5½ J 6 J	43 GS 11.5 (1540, 38 G 11.5)	192 197 202		631	635	184 189 194	621	287	1882	
205/65 R 15 C	6	102/100 R	5½ J	43 GS 11.5	212				204				
		102/100 T	6 J 6½ J		217 222	657	663	209 214	647	297	1960		
215/65 R 15 C	6	104/102 R	6 J	43 GS 11.5	225				216				
		104/102 T	6½ J 7 J		230 235	673	677	221 226	661	302	2003		
185/60 R 15 C	6	94/92 T	5½ J 6 J	43 GS 11.5	197 202		611	617	189 194	603	279	1827	
185/55 R 15 C	6	90/88 T	5½ J 6 J	43 GS 11.5	197 202		593	598	189 194	585	272	1773	
16 inch													
235/85 R 16 C	8	114/111 Q	6 J		239				230				
	10	120/116 Q	6½ J		244	822	830	235	806	363	2442		
		120/116 S	7 J 7½ J		249 254				240 245				
205 R 16 C	8	110/108 T	5½ J 6 J 6½ J	43 GS 11.5	211 216 221		750	756	203 208 213	736	338	2230	
175/75 R 16 C	8	101/99 R	4½ J 5 J 5½ J	TR 600 XHP, TR 602 HP	179 184 189		678	684	172 177 182	668	308	2024	
185/75 R 16 C	8	104/102 R	5 J 5½ J 6 J	TR 600 XHP, TR 602 HP	191 196 201	696	700		184 189 194	684	314	2073	
195/75 R 16 C	8	107/105 R	5 J	TR 600 XHP, TR 602 HP	199				191				
		107/105 T	5½ J		204	710	716		196	698	320	2115	
	10	110/108 R	6 J		209				201				
195/75 R 16 CP	8	107 R		TR 600 XHP, TR 602 HP, 40 MS									
205/75 R 16 C	8	110/108 R	5½ J	TR 600 XHP, TR 602 HP	211	726	732		203	714	326	2163	
	10	113/111 R	6 J 6½ J		216 221				208 213				
215/75 R 16 C	8	113/111 R	5½ J	TR 600 XHP, TR 602 HP, 40 MS	220				211				
	10	116/114 N	6 J		225	740	748		216	728	332	2206	
		116/114 R	6½ J 7 J		230 235				221 226				

	PR	Load Index	Wheel position ^{a)}	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed
				3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	(km/h)	
	6	97 95	S T	1220 2310	1300 2460	1380 2610	1460 2760										T 190	
	6	102 100	S T	1420 2675	1515 2855	1605 3030	1700 3200										R 170 T 190	
	6	104 102	S T	1505 2840	1605 3030	1700 3215	1800 3400										R 170 T 190	
	6	94 92	S T	1120 2110	1195 2245	1270 2385	1340 2520										T 190	
	6	90 88	S T	1005 1875	1070 2000	1135 2120	1200 2240										T 190	
	8	114 111	S T	1635 3020	1740 3220	1850 3415	1955 3610	2055 3800	2160 3990	2260 4175	2360 4360						Q 160 S 180	
	10	120 116	S T	1665 2970	1775 3170	1880 3360	1990 3550	2059 3740	2200 3925	2300 4110	2405 4290	2505 4470	2605 4650	2700 4825	2800 5000			
	8	110 108	S T	1535 2890	1635 3085	1735 3270	1830 3455	1930 3640	2025 3820	2120 4000							T 190	
	8	101 99	S T	1140 2145	1215 2290	1290 2430	1360 2565	1435 2700	1505 2835	1575 2970	1650 3100						R 170	
	8	104 102	S T	1245 2355	1330 2510	1410 2665	1490 2815	1570 2965	1645 3110	1725 3255	1800 3400						R 170	
	8	107 105	S T	1350 2560	1440 2730	1525 2900	1615 3060	1700 3225	1785 3385	1865 3545	1950 3700						R 170 T 190	
	10	110 108	S T	1355 2555	1445 2725	1535 2890	1620 3055	1705 3220	1790 3380	1875 3535	1955 3690	2040 3845	2120 4000					
	8	107 107	FA S RA S	1350 1200	1440 1280	1525 1360	1615 1435	1700 1510	1785 1585	1865 1660	1950 1735	1805	1880	1950				
	1.85x107		RA T	2500	2665	2830	2990	3145	3300	3455	3610							
	8	110 108	S T	1470 2770	1565 2955	1660 3135	1755 3310	1850 3485	1940 3660	2030 3830	2120 4000						R 170	
	10	113 111	S T	1470 2785	1565 2970	1665 3150	1755 3330	1850 3510	1940 3680	2035 3855	2125 4025	2210 4195	2300 4360					
	8	113 111	S T	1590 3020	1700 3220	1800 3415	1905 3610	2005 3800	2105 3990	2205 4175	2300 4360						N 140 R 170	
	10	116 114	S T	1600 3015	1705 3215	1805 3410	1910 3605	2010 3795	2110 3985	2210 4170	2310 4355	2405 4540	2500 4720					
	10	116 114	FA S RA S RA T	1600 1600 3015	1705 1705 3215	1805 1805 3410	1910 1910 3605	2010 2010 3795	2110 2110 3985	2210 2210 4170	2310 2310 4355	2405 2405 4540	2500 2500 4720	2500 2500 4720	2500 2500 4720	2500 2500 4720		

* (Valves) see page 80

See page 129 for footnotes

Size	Tyre		Rim ⁷⁾ (meas- uring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / – 2 % (mm)	Rolling circum- ference + 1.5 % – 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾								
					Width Stand- ard	Spe- cial	Outer-Ø Stand- ard	Spe- cial	Width	Outer- Ø			
16 inch													
225/75 R 16 C	8	116/114 R	6 ½ J 7 J	TR 600 XHP, TR 602 HP, 40 MS	232 237 242	758	764	223 228 233	744	338	2254		
		116/114 R (118/116 P)											
	10	118/116 R											
		121/120 N (118 R)											
		121/120 R											
		121/120 R (122 L)											
225/75 R 16 CP	8	116 R	TR 600 XHP, TR 602 HP, 40 MS										
		118 R											
215/70 R 16 C	6	108/106 S	5 ½ J	43 GS 11.5	220			211					
		108/106 T	6 J 6 ½ J 7 J		225 230 235			720					726
195/65 R 16 C	6	100/98 T	5 ½ J	TR 600 XHP, TR 602 HP	204			196					
	8	104/102 R	6 J		209			201					
		104/102 R (100 R)											
		104/102 T											
		104/102 T (100 T)											
205/65 R 16 C	6	103/101 T (99 H)	5 ½ J	43 GS 11.5	212			204					
		103/101 H	6 J		217			209					
			6 ½ J		222			214					
	8	107/105 R		TR 600 XHP, TR 602 HP									
		107/105 R (103 R)											
		107/105 R (103 T)											
		107/105 T											
		107/105 T (103 T)											
		107/105 T (103 H)											

	PR	Load Index	Wheel position ^{a)}	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed
		LI		3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	(km/h)	
	8	116	S	1730	1845	1960	2070	2180	2285	2395	2500						N 140 R 170 (R 170) (P 150) (L 120)	
		114	T	3270	3485	3695	3905	4115	4320	4520	4720							
		118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640					
		116	T	3195	3410	3615	3820	4020	4220	4420	4615	4810	5000					
	10	118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640					
		116	T	3195	3410	3615	3820	4020	4220	4420	4615	4810	5000					
		121	S	1725	1835	1950	2060	2170	2275	2385	2490	2595	2695	2800	2900			
		120	T	3330	3550	3765	3980	4190	4395	4605	4805	5010	5205	5405	5600			
		118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640					
		122	S												3000			
	8	116	FA S	1730	1845	1960	2070	2180	2285	2395	2500							
		116	RA S	1540	1640	1740	1840	1940	2035	2130	2225	2315	2410	2500				
	1.85x116		RA T	3200	3415	3625	3830	4030	4230	4430	4625							
		10	118	FA S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640				
	118		RA S	1515	1615	1715	1815	1910	2005	2095	2190	2280	2370	2460	2550	2640		
	1.85x116		RA T	3120	3330	3530	3730	3930	4125	4320	4510	4700	4885					
	6	108	S	1675	1785	1895	2000										S 180 T 190	
		106	T	3180	3390	3595	3800											
	6	100	S	1340	1425	1515	1600										R 170 T 190	
		98	T	2510	2675	2840	3000											
	8	104	S	1245	1330	1410	1490	1570	1645	1725	1800							
		102	T	2355	2510	2665	2815	2965	3110	3255	3400							
		100	S	1340	1425	1515	1600											
	6	103	S	1465	1560	1655	1750										R 170 T 190 H 210	
		101	T	2760	2940	3120	3300											
		99	S	1455	1550													
	8	107	S	1350	1440	1525	1615	1700	1785	1865	1950							
		105	T	2560	2730	2900	3060	3225	3385	3545	3700							
		103	S	1465	1560	1655	1750											

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions						Radius stat. + / – 2 % (mm)	Rolling circumference + 1.5 % – 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾				new				
					Width		Outer-Ø		Width	Outer-Ø			
					Stand-ard	Spe-cial	Stand-ard	Spe-cial					
16 inch													
215/65 R 16 C	4	102/100 T	6 J	43 GS 11.5	225 230 235	698	702	216 221 226	686	315	2079		
		102/100 H	6 ½ J										
	6	106/104 T	7 J	TR 600 XHP, TR 602 HP									
	8	109/107 P											
		109/107 R											
		109/107 R (106 R)											
		109/107 R (106 T)											
		109/107 R (106/104 T)											
		109/107 T											
225/65 R 16 C	8	112/110 R	6 J	TR 600 XHP, TR 602 HP	232 237 242	710	716	223 228 233	698	320	2115		
		112/110 T	6 ½ J 7 J										
225/65 R 16 CP	8	112 R		TR 600 XHP, TR 602 HP, 40 MS									
235/65 R 16 C	8	115/113 S	6 ½ J	TR 600 XHP, TR 602 HP, 40 MS	245 250 255	724	730	235 240 245	712	325	2157		
		115/113 S (118/116 R)	7 J										
		115/113 R	7 ½ J										
	10	118/116 R (115/113 S)											
		121/119 N (118 R)											
		121/119 R			40 MS								
235/65 R 16 CP	8	115 R		TR 600 XHP, TR 602 HP, 40 MS									
285/65 R 16 C	10	128 N (123 R) 131 R	8 J 8 ½ J 9 J	TR 600 XHP, TR 602 HP, 40 MS	299 304 309	790	798	287 292 297	776	351	2351		

	PR	Load Index	Wheel position ^{a)}	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed
		LI		3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	(km/h)	
	4	102 100	S T	1595 3000	1700 3200												P 150 R 170 T 190 H 210	
	6	106 104	S T	1590 3010	1695 3210	1800 3405	1900 3600											
	8	109 107	S T	1425 2700	1520 2880	1615 3055	1705 3230	1795 3400	1885 3570	1975 3735	2060 3900							
	8	112 110	S T	1550 2935	1655 3130	1755 3320	1855 3510	1950 3695	2050 3880	2145 4060	2240 4240						R 170 T 190	
	8 1.85x112	112 112	FA S RA S RA T	1550 1380 2870	1655 1470 3060	1755 1560 3245	1855 1650 3430	1950 1735 3615	2050 1825 3790	2145 1910 3970	2240 1990 4145	2075	2160	2240				
	8	115 113 118 116	S T S T	1680 3185 1685 3195	1795 3395 1800 3405	1905 3605 1910 3615	2010 3805 2015 3820	2120 4010 2125 4020	2225 4210 2230 4220	2330 4405 2335 4420	2430 4600 2435 4615	2540 4810	2640 5000				N 140 R 170 S 180	
	10	118 116 121 119 118	S T S T S	1685 3195 1725 3235 1685	1800 3405 1835 3445 1800	1910 3615 1950 3655 1910	2015 3820 2060 3865 2015	2125 4020 2170 4070 2125	2230 4220 2275 4270 2230	2335 4420 2385 4470 2335	2435 4615 2490 4670 2435	2540 4810	2640 5000	2800	2900	5440		
	8 1.85x115	115 115	FA S RA S RA T	1680 1495 3110	1795 1595 3320	1905 1695 3520	2010 1790 3720	2120 1885 3920	2225 1975 4110	2330 2070 4305	2430 2160 4495	2250	2340	2430				
	10	128 123 131	S S S	2300 2060 2320	2455 2195 2470	2605 2330 2620	2750 2465 2770	2895 2595 2915	3040 2720 3060	3180 2850 3205	3325 2975 3345	3460 3100 3485	3600				N 140 R 170	

* (Valves) see page 80

See page 129 for footnotes

Size	Tyre		Service description ⁶⁾	Rim ⁷⁾ (meas- uring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circum- ference + 1.5 % - 2.5 % (mm)	
	PR					Max. standard value in operation ⁸⁾								
						Width		Outer-Ø		Width	Outer- Ø			
						Stand- ard	Spe- cial	Stand- ard	Spe- cial					
16 inch														
195/60 R 16 C	6	99/97 T	5 ½ J	43 GS 11.5		204		650	654	196	640	297	1939	
		99/97 H	6 J 6 ½ J			209 214	201 206							
205/60 R 16 C	6	100/98 T	6 J 6 ½ J	43 GS 11.5		217 222		–	666	209 214	652	302	1976	
215/60 R 16 C	6	103/101 R	6 J	43 GS 11.5		225		674	680	216	664	306	2012	
		103/101 T	6 ½ J 7 J			230 235	221 226							
225/60 R 16 C	6	101/99 H	6 ½ J 7 J	43 GS 11.5		237		686	–	228	676	311	2048	
		105/103 H	7 J			242	233							
		105/103 H (101 H)	7 ½ J			247	238							
	8	111/109 T (105 H)												
17 inch														
185/60 R 17 C	6	96/94 R	5 ½ J 6 J	43 GS 11.5		197 202		662	668	189 194	654	305	1982	
205/70 R 17 C	10	115/113 R	5 ½ J 6 J 6 ½ J	TR 600 XHP, TR 602 HP, 40 MS		212 217 222		732	738	204 209 214	720	331	2182	
215/60 R 17 C	6	104/102 H	6 J	43 GS 11.5		225		700	706	216	690	319	2091	
	8	109/107 R	6 ½ J 7 J			230 235	221 226							
		109/107 T												
		109/107 T (104 H)												
235/60 R 17 C	10	117/115 R	6 ½ J 7 J 7 ½ J	TR 600 XHP, TR 602 HP, 40 MS		245 250 255		726	730	235 240 245	714	329	2163	
225/55 R 17 C	6	104/102 H	6 ½ J	43 GS 11.5		237		690	–	228	680	315	2060	
	8	109/107 T (104 T)	7 J 7 ½ J			242 247	233 238							
		109/107 H (104 H)												
255/55 R 17 C	10	118/116 R	7 ½ J 8 J 8 ½ J	TR 600 XHP, TR 602 HP, 40 MS		271 276 281		724	728	260 265 270	712	328	2157	
18 inch														
255/55 R 18 C	8	116/114 T	7 ½ J 8 J 8 ½ J	43 GS 11.5		271 276 281		749	753	260 265 270	737	341	2233	
255/55 R 18 CP	10	120 R		TR 600 XHP, TR 602 HP, 40 MS										

	PR	Load Index	Wheel position ^{a)}	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed (km/h)
				3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0		
	6	99 97	S T	1295 2445	1380 2605	1465 2765	1550 2920										T 190 H 210	
	6	100 98	S T	1240 2510	1425 2675	1515 2840	1600 3000										T 190	
	6	103 101	S T	1460 2760	1560 3940	1655 3120	1750 3300										R 170 T 190	
	6	101 99	S T	1550 2900	1650 3100												T 190 H 210	
		105	S	1550	1650	1750	1850											
		103	T	2930	3120	3310	3500											
	8	111 109	S T	1510 2855	1610 3040	1705 3225	1805 3410	1900 3590	1995 3770	2090 3945	2180 4120							
105		S	1550	1650	1750	1850												
	6	96 94	S T	1190 2240	1265 2390	1345 2535	1420 2680										R 170	
	10	115 113	S T	1555 2940	1655 3135	1755 3325	1855 3515	1955 3700	2050 3885	2150 4065	2245 4245	2335 4425	2430 4600				R 170	
	6	104 102	S T	1505 2845	1605 3030	1705 3215	1800 3400										R 170 T 190 H 210	
		8	109 107	S T	1425 2700	1520 2880	1615 3055	1705 3230	1795 3400	1885 3570	1975 3735	2060 3900						
	104		S	1505	1605	1705	1800											
	10	117 115	S T	1640 3105	1750 3310	1860 3515	1965 3715	2070 3910	2170 4105	2270 4295	2370 4485	2470 4675	2570 4860				R 170	
	6	104 102	S T	1505 2845	1605 3030	1705 3215	1800 3400										T 190 H 210	
		8	109 107	S T	1425 2700	1520 2880	1615 3055	1705 3230	1795 3400	1885 3570	1975 3735	2060 3900						
	104		S	1505	1605	1705	1800											
	10	118 116	S T	1685 3195	1800 3405	1910 3615	2015 3820	2125 4020	2230 4220	2335 4420	2435 4615	2540 4810	2640 5000				R 170	
	8	116 114	S T	1730 3265	1845 3480	1955 3695	2065 3905	2175 4110	2285 4315	2390 4520	2500 4720						R 170 T 190	
	10	120	FA S	1790	1910	2025	2140	2255	2365	2475	2585	2695	2800					
		120	RA S	1610	1715	1820	1920	2025	2125	2225	2325	2420	2515	2610	2705	2800		
		1.85x120	RA T	3310	3530	3745	3960	4165	4375	4580	4780	4980	5180					

* (Valves) see page 80

See page 129 for footnotes

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
82/80 series			
175 R 13	86	585	2,6
125/80 R 13	65	320	2,6
135/80 R 13	70	370	2,6
145/80 R 13	75	425	2,6
155/80 R 13	79	480	2,6
155/80 R 13 Rf.	83	535	3,1
165/80 R 13	83	535	2,6
165/80 R 13 Rf.	87	600	3,1
145/80 R 14	76	440	2,6
165/80 R 14	85	565	2,6
175/80 R 14	88	615	2,6
185/80 R 14	91	675	2,6
165/80 R 15	87	600	2,6
195/80 R 15	96	780	2,6
215/80 R 15	102	935	2,6
205/80 R 16 XL	104	990	3,0
75 series			
205/75 R 15	97	805	2,7
215/75 R 15	100	880	2,7
225/75 R 15	102	935	2,7
P 235/75 R 15	105	1020	2,7
235/75 R 15 XL	109	1135	3,1
265/75 R 15	112	1230	2,7
215/75 R 16 XL	107	1070	3,1
225/75 R 16	104	990	2,7
225/75 R 16 XL	108	1100	3,1
P 235/75 R 16	106	1045	2,7
235/75 R 16	108	1100	2,7
235/75 R 16 XL	112	1230	3,1
245/75 R 16	111	1200	2,7
265/75 R 16	116	1375	2,7
235/75 R 17	109	1135	2,7
70 series			
135/70 R 13	68	345	2,7
145/70 R 13	71	380	2,7
155/70 R 13	75	425	2,7

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
70 series			
165/70 R 13	79	480	2,7
165/70 R 13 XL / Rf.	83	535	3,1
175/70 R 13	82	525	2,7
175/70 R 13 XL	86	585	3,1
185/70 R 13	86	585	2,7
155/70 R 14	77	455	2,7
165/70 R 14	81	510	2,7
165/70 R 14 XL / Rf.	85	565	3,1
175/70 R 14	84	550	2,7
175/70 R 14 XL	88	615	3,1
185/70 R 14	88	615	2,7
185/70 R 14 XL	92	695	3,1
195/70 R 14	91	675	2,7
205/70 R 14	95	760	2,7
205/70 R 14 XL	98	825	3,1
135/70 R 15	70	370	2,7
155/70 R 15	78	470	2,7
195/70 R 15 Rf.	97	805	3,1
205/70 R 15	96	780	2,7
205/70 R 15 XL	100	880	3,1
215/70 R 15	98	825	2,7
225/70 R 15	100	880	2,7
235/70 R 15	103	960	2,7
255/70 R 15	108	1100	2,7
265/70 R 15	112	1230	2,7
195/70 R 16	94	735	2,7
205/70 R 16	97	805	2,7
P 215/70 R 16	99	855	2,7
215/70 R 16	100	880	2,7
215/70 R 16 XL	104	990	3,1
225/70 R 16	102	935	2,7
	103	965	2,7
225/70 R 16 XL	107	1070	3,1
P 235/70 R 16	104	990	2,7
235/70 R 16	105	1020	2,7
245/70 R 16	107	1070	2,7

Conditions of use:

An increase of 10 % for passenger tyres resp. 5 % for C van tyres over the load capacity, as quoted in these tables, is permitted when tyres are fitted to caravans and light trailers with a maximum operating speed up to 100 km/h (62 mph). The basic inflation pressure should be increased by 0.2 bar for passenger tyres and by +6 % for C van tyres, as quoted in these tables.

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
70 series			
245/70 R 16 XL	111	1200	3,1
255/70 R 16	111	1200	2,7
255/70 R 16 XL	115	1335	3,1
265/70 R 16	112	1230	2,7
275/70 R 16	114	1300	2,7
225/70 R 17 XL	108	1100	3,1
235/70 R 17 XL	109	1135	3,1
235/70 R 17 XL	111	1200	3,1
P 245/70 R 17	108	1100	2,7
245/70 R 17	110	1165	2,7
245/70 R 17 XL	114	1300	3,1
P 255/70 R 17	110	1165	2,7
255/70 R 17	112	1230	2,7
P 265/70 R 17	113	1265	2,7
265/70 R 17	115	1335	2,7
235/70 R 18	110	1165	2,7
265/70 R 18	116	1375	2,7
155/70 R 19	84	550	2,7
155/70 R 19 XL	88	615	3,1
65 series			
155/65 R 13	73	400	2,7
165/65 R 13	77	455	2,7
175/65 R 13	80	495	2,7
155/65 R 14	75	425	2,7
165/65 R 14	79	480	2,7
175/65 R 14	82	525	2,7
175/65 R 14 XL / Rf.	86	585	3,1
185/65 R 14	86	585	2,7
185/65 R 14 XL	90	660	3,1
195/65 R 14	89	640	2,7
145/65 R 15	72	390	2,7
155/65 R 15	77	455	2,7
165/65 R 15	81	510	2,7
175/65 R 15	84	550	2,7
175/65 R 15 XL	88	615	3,1
185/65 R 15	88	615	2,7
185/65 R 15 XL	92	695	3,1
195/65 R 15	91	675	2,7
195/65 R 15 XL / Rf.	95	760	3,1
205/65 R 15	94	735	2,7
205/65 R 15 XL / Rf.	99	855	3,1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
65 series			
215/65 R 15	96	780	2,7
215/65 R 15 Rf.	100	880	3,1
195/65 R 16	92	695	2,7
205/65 R 16	95	760	2,7
215/65 R 16	98	825	2,7
215/65 R 16 XL	102	935	3,1
235/65 R 16	103	965	2,7
255/65 R 16	109	1135	2,7
205/65 R 17	96	780	2,7
215/65 R 17	98	825	2,7
	99	855	2,7
215/65 R 17 XL	103	965	3,1
225/65 R 17	102	935	2,7
225/65 R 17 XL	106	1045	3,1
235/65 R 17	103	965	2,7
	104	990	2,7
235/65 R 17 XL	108	1100	3,1
245/65 R 17	107	1070	2,7
245/65 R 17 XL	111	1200	3,1
255/65 R 17	110	1165	2,7
255/65 R 17 XL	114	1300	3,1
265/65 R 17	112	1230	2,7
265/65 R 17 XL	116	1375	3,1
275/65 R 17	115	1335	2,7
285/65 R 17	116	1375	2,7
235/65 R 18	106	1045	2,7
235/65 R 18 XL	110	1165	3,1
255/65 R 18	111	1200	2,7
265/65 R 18	114	1300	2,7
275/65 R 18	116	1375	2,7
235/65 R 19 XL	109	1135	3,1
60 series			
165/60 R 13	73	400	2,7
175/60 R 13	77	455	2,7
185/60 R 13	80	495	2,7
165/60 R 14	75	425	2,7
165/60 R 14 XL	79	480	3,1
175/60 R 14	79	480	2,7
185/60 R 14	82	525	2,7
185/60 R 14 XL	86	585	3,1
195/60 R 14	86	585	2,7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
60 series			
155/60 R 15	74	410	2,7
165/60 R 15	77	455	2,7
165/60 R 15 XL	81	510	3,1
175/60 R 15	81	510	2,7
185/60 R 15	84	550	2,7
185/60 R 15 XL	88	615	3,1
195/60 R 15	88	615	2,7
195/60 R 15 XL	92	695	3,1
205/60 R 15	91	675	2,7
205/60 R 15 XL / Rf.	95	760	3,1
215/60 R 15	95	760	2,7
215/60 R 15 XL	98	825	3,1
225/60 R 15	96	780	2,7
235/60 R 15	98	825	2,7
255/60 R 15	102	935	2,7
275/60 R 15	107	1070	2,7
185/60 R 16	86	585	2,7
195/60 R 16	89	640	2,7
195/60 R 16 XL	93	715	3,1
205/60 R 16	92	695	2,7
205/60 R 16 XL	96	780	3,1
215/60 R 16	95	760	2,7
215/60 R 16 XL / Rf.	99	855	3,1
225/60 R 16	98	825	2,7
225/60 R 16 XL / Rf.	102	935	3,1
235/60 R 16	100	880	2,7
235/60 R 16 XL / Rf.	104	990	3,1
205/60 R 17	93	715	2,7
205/60 R 17 XL	97	805	3,1
215/60 R 17	96	780	2,7
215/60 R 17 XL	100	880	3,1
225/60 R 17	99	855	2,7
225/60 R 17 XL	103	965	3,1
235/60 R 17	102	935	2,7
235/60 R 17 XL	106	1045	3,1
255/60 R 17	106	1045	2,7
275/60 R 17	110	1165	2,7
P 225/60 R 18	99	855	2,7
215/60 R 18 XL	98	825	3,1
225/60 R 18	100	880	2,7

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
60 series			
225/60 R 18 XL	104	990	3,1
235/60 R 18	103	965	2,7
235/60 R 18 XL	107	1070	3,1
P 245/60 R 18	104	990	2,7
245/60 R 18	105	1020	2,7
255/60 R 18	108	1100	2,7
255/60 R 18 XL	112	1230	3,1
265/60 R 18	110	1165	2,7
265/60 R 18 XL	114	1300	3,1
275/60 R 18	113	1265	2,7
285/60 R 18	116	1375	2,7
255/60 R 19	109	1135	2,7
255/60 R 19 XL	113	1265	3,1
235/60 R 20 XL	108	1100	3,1
275/60 R 20	115	1335	2,7
275/60 R 20 XL	119	1495	3,1
55 series			
195/55 R 13	80	495	2,7
185/55 R 14	80	495	2,7
175/55 R 15	77	455	2,7
185/55 R 15	82	525	2,7
185/55 R 15 XL / Rf.	86	585	3,1
195/55 R 15	85	565	2,7
195/55 R 15 XL / Rf.	89	640	3,1
205/55 R 15	88	615	2,7
225/55 R 15	92	695	2,7
185/55 R 16	83	535	2,7
185/55 R 16 XL	87	600	3,1
195/55 R 16	87	600	2,7
195/55 R 16 XL	91	675	3,1
205/55 R 16	91	675	2,7
205/55 R 16 XL	94	735	3,1
215/55 R 16	93	715	2,7
215/55 R 16 Rf.	95	760	3,1
215/55 R 16 XL	97	805	3,1
225/55 R 16	95	760	2,7
225/55 R 16 XL	99	855	3,1
255/55 R 16	103	965	2,7
195/55 R 17	88	615	2,7
205/55 R 17	91	675	2,7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
55 series			
205/55 R 17 XL	95	760	3,1
215/55 R 17	94	735	2,7
215/55 R 17 XL	98	825	3,1
225/55 R 17	97	805	2,7
225/55 R 17 XL / Rf.	101	910	3,1
235/55 R 17	99	855	2,7
235/55 R 17 XL / Rf.	103	965	3,1
245/55 R 17	102	935	2,7
255/55 R 17	104	990	2,7
275/55 R 17	109	1135	2,7
205/55 R 18 XL	96	780	3,1
215/55 R 18	95	760	2,7
215/55 R 18 XL	99	855	3,1
225/55 R 18	98	825	2,7
225/55 R 18 XL	102	935	3,1
235/55 R 18	100	880	2,7
235/55 R 18 XL	104	990	3,1
245/55 R 18 XL	107	1070	3,1
255/55 R 18	105	1020	2,7
255/55 R 18 XL	109	1135	3,1
205/55 R 19 XL	97	805	3,1
225/55 R 19	99	855	2,7
225/55 R 19 XL	103	965	3,1
235/55 R 19	101	910	2,7
235/55 R 19 XL	105	1020	3,1
245/55 R 19	103	965	2,7
255/55 R 19	107	1070	2,7
255/55 R 19 XL	111	1200	3,1
265/55 R 19	109	1135	2,7
265/55 R 19 XL	113	1265	3,1
275/55 R 19	111	1200	2,7
195/55 R 20 XL	95	760	3,1
235/55 R 20	102	935	2,7
235/55 R 20 XL	105	1020	3,1
255/55 R 20	107	1070	2,7
255/55 R 20 XL	110	1165	3,1
275/55 R 20 XL	117	1415	3,1
50 series			
175/50 R 13	72	390	2,7
185/50 R 14	77	455	2,7

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
50 series			
165/50 R 15	72	390	2,7
195/50 R 15	82	525	2,7
205/50 R 15	86	585	2,7
185/50 R 16	81	510	2,7
195/50 R 16	84	550	2,7
195/50 R 16 XL	88	615	3,1
205/50 R 16	87	600	2,7
225/50 R 16	92	695	2,7
	93	715	2,7
205/50 R 17	89	640	2,7
205/50 R 17 XL	93	715	3,1
215/50 R 17	91	675	2,7
215/50 R 17 XL	95	760	3,1
225/50 R 17	94	735	2,7
225/50 R 17 XL	98	825	3,1
235/50 R 17	96	780	2,7
235/50 R 17 XL	100	880	3,1
245/50 R 17	99	855	2,7
215/50 R 18	92	695	2,7
215/50 R 18 XL	96	780	3,1
225/50 R 18	95	760	2,7
225/50 R 18 XL	99	855	3,1
235/50 R 18	97	805	2,7
235/50 R 18 XL	101	910	3,1
245/50 R 18	100	880	2,7
245/50 R 18 XL	104	990	3,1
285/50 R 18	109	1135	2,7
235/50 R 19	99	855	2,7
235/50 R 19 XL	103	965	3,1
245/50 R 19	100	880	2,7
	101	910	2,7
245/50 R 19 XL	105	1020	3,1
255/50 R 19	103	965	2,7
255/50 R 19 XL	107	1070	3,1
265/50 R 19	106	1045	2,7
265/50 R 19 XL	110	1165	3,1
275/50 R 19 XL	112	1230	3,1
245/50 R 20	102	935	2,7
245/50 R 20 XL	105	1020	3,1
255/50 R 20	105	1020	2,7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
50 series			
255/50 R 20 XL	109	1135	3,1
265/50 R 20 XL	111	1200	3,1
275/50 R 20	109	1135	2,7
275/50 R 20 XL	113	1265	3,1
285/50 R 20	112	1230	2,7
285/50 R 20 XL	116	1375	3,1
295/50 R 20 XL	118	1450	3,1
305/50 R 20 XL	120	1540	3,1
255/50 R 21 XL	109	1135	3,1
275/50 R 21 XL	113	1265	3,1
45 series			
195/45 R 13	75	425	2,7
195/45 R 14	77	455	2,7
195/45 R 15	78	470	2,7
195/45 R 16	80	495	2,7
195/45 R 16 XL	84	550	3,1
205/45 R 16	83	535	2,7
205/45 R 16 XL	87	600	3,1
215/45 R 16	86	585	2,7
215/45 R 16 XL	90	660	3,1
225/45 R 16	89	640	2,7
245/45 R 16	94	735	2,7
195/45 R 17	81	510	2,7
205/45 R 17	84	550	2,7
205/45 R 17 XL	88	615	3,1
215/45 R 17	87	600	2,7
215/45 R 17 XL	91	675	3,1
225/45 R 17	91	675	2,7
225/45 R 17 XL / Rf.	94	735	3,1
235/45 R 17	94	735	2,7
235/45 R 17 XL	97	805	3,1
245/45 R 17	95	760	2,7
245/45 R 17 XL / Rf.	99	855	3,1
255/45 R 17	98	825	2,7
255/45 R 17 XL	102	935	3,1
215/45 R 18 XL	93	715	3,1
225/45 R 18	91	675	2,7
225/45 R 18 XL	95	760	3,1
235/45 R 18	94	735	2,7
235/45 R 18 XL	98	825	3,1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
45 series			
245/45 R 18	96	780	2,7
245/45 R 18 XL	100	880	3,1
255/45 R 18	99	855	2,7
255/45 R 18 XL	103	965	3,1
265/45 R 18	101	910	2,7
275/45 R 18	103	965	2,7
225/45 R 19	92	695	2,7
225/45 R 19 XL	96	780	3,1
235/45 R 19	95	760	2,7
235/45 R 19 XL	99	855	3,1
245/45 R 19	98	825	2,7
245/45 R 19 XL	102	935	3,1
255/45 R 19	100	880	2,7
255/45 R 19 XL	104	990	3,1
265/45 R 19 XL	105	1020	3,1
275/45 R 19 XL	108	1100	3,1
285/45 R 19	107	1070	2,7
285/45 R 19 XL	111	1200	3,1
295/45 R 19	109	1135	2,7
235/45 R 20 XL	100	880	3,1
245/45 R 20	99	855	2,7
245/45 R 20 XL	103	965	3,1
255/45 R 20	101	910	2,7
255/45 R 20 XL	105	1020	3,1
265/45 R 20	104	990	2,7
265/45 R 20 XL	108	1100	3,1
275/45 R 20 XL	110	1165	3,1
285/45 R 20 XL	112	1230	3,1
295/45 R 20 XL	114	1300	3,1
265/45 R 21 XL	108	1100	3,1
275/45 R 21	107	1070	2,7
275/45 R 21 XL	110	1165	3,1
285/45 R 21	109	1135	2,7
285/45 R 21 XL	113	1265	3,1
255/45 R 22 XL	107	1070	3,1
285/45 R 22 XL	114	1300	3,1
305/45 R 22 XL	118	1450	3,1
40 series			
195/40 R 14	73	400	2,7
195/40 R 16 XL	80	495	3,1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
40 series			
215/40 R 16 XL	86	585	3,1
225/40 R 16	85	565	2,7
195/40 R 17 XL	81	510	3,1
205/40 R 17 XL	84	550	3,1
215/40 R 17	83	535	2,7
215/40 R 17 XL	87	600	3,1
235/40 R 17	90	660	2,7
245/40 R 17	91	675	2,7
255/40 R 17	94	735	2,7
255/40 R 17 XL	98	825	3,1
205/40 R 18 XL	86	585	3,1
215/40 R 18	85	565	2,7
215/40 R 18 XL	89	640	3,1
225/40 R 18	88	615	2,7
225/40 R 18 XL	92	695	3,1
235/40 R 18	91	675	2,7
235/40 R 18 XL	95	760	3,1
245/40 R 18	93	715	2,7
245/40 R 18 XL	97	805	3,1
255/40 R 18	95	760	2,7
255/40 R 18 XL	99	855	3,1
265/40 R 18 XL	101	910	3,1
275/40 R 18	99	855	2,7
275/40 R 18 XL	103	965	3,1
225/40 R 19	89	640	2,7
225/40 R 19 XL	93	715	3,1
235/40 R 19	92	695	2,7
235/40 R 19 XL	96	780	3,1
245/40 R 19	94	735	2,7
245/40 R 19 XL	98	825	3,1
255/40 R 19	96	780	2,7
255/40 R 19 XL	100	880	3,1
265/40 R 19	98	825	2,7
265/40 R 19 XL	102	935	3,1
275/40 R 19	101	910	2,7
275/40 R 19 XL	105	1020	3,1
285/40 R 19	103	965	2,7
285/40 R 19 XL	107	1075	3,1
295/40 R 19 XL	108	1100	3,1
225/40 R 20 XL	94	735	3,1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
40 series			
235/40 R 20 XL	96	780	3,1
245/40 R 20	95	760	2,7
245/40 R 20 XL	99	855	3,1
255/40 R 20	97	805	2,7
255/40 R 20 XL	101	910	3,1
265/40 R 20 XL	104	990	3,1
275/40 R 20 XL	106	1045	3,1
285/40 R 20	104	990	2,7
285/40 R 20 XL	108	1100	3,1
295/40 R 20 XL	110	1165	3,1
305/40 R 20 XL	112	1230	3,1
245/40 R 21 XL	100	880	3,1
255/40 R 21 XL	102	935	3,1
265/40 R 21	101	910	2,7
265/40 R 21 XL	105	1020	3,1
275/40 R 21 XL	107	1075	3,1
285/40 R 21 XL	109	1135	3,1
295/40 R 21 XL	111	1200	3,1
315/40 R 21	111	1200	2,7
315/40 R 21 XL	115	1335	3,1
325/40 R 21	113	1265	2,7
255/40 R 22 XL	103	965	3,1
265/40 R 22 XL	106	1045	3,1
275/40 R 22 XL	107	1070	3,1
275/40 R 22 XL	108	1100	3,1
285/40 R 22	106	1045	2,7
285/40 R 22 XL	110	1165	3,1
305/40 R 22 XL	114	1300	3,1
325/40 R 22	114	1300	2,7
305/40 R 23 XL	115	1335	3,1
285/40 R 24 XL	112	1230	3,1
305/40 R 24 XL	117	1415	3,1
35 series			
215/35 R 17 XL	83	535	3,1
245/35 R 17	87	600	2,7
215/35 R 18 XL	84	550	3,1
225/35 R 18 XL	87	600	3,1
245/35 R 18	88	615	2,7
245/35 R 18 XL	92	695	3,1
255/35 R 18	90	660	2,7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
35 series			
255/35 R 18 XL	94	735	3,1
265/35 R 18	93	715	2,7
265/35 R 18 XL	97	805	3,1
275/35 R 18	95	760	2,7
275/35 R 18 XL	99	855	3,1
285/35 R 18	97	805	2,7
285/35 R 18 XL	101	910	3,1
215/35 R 19 XL	85	565	3,1
225/35 R 19 XL	88	615	3,1
235/35 R 19	87	600	2,7
235/35 R 19 XL	91	675	3,1
245/35 R 19 XL	93	715	3,1
255/35 R 19	92	695	2,7
255/35 R 19 XL	96	780	3,1
265/35 R 19	94	735	2,7
265/35 R 19 XL	98	825	3,1
275/35 R 19 XL	100	880	3,1
285/35 R 19	99	855	2,7
285/35 R 19 XL	103	965	3,1
295/35 R 19	100	880	2,7
295/35 R 19 XL	104	990	3,1
225/35 R 20 XL	90	660	3,1
235/35 R 20	88	615	2,7
235/35 R 20 XL	92	695	3,1
245/35 R 20	91	675	2,7
245/35 R 20 XL	95	760	3,1
255/35 R 20 XL	97	805	3,1
265/35 R 20	95	760	2,7
265/35 R 20 XL	99	855	3,1
275/35 R 20 XL	102	935	3,1
285/35 R 20	100	880	2,7
285/35 R 20 XL	104	990	3,1
295/35 R 20	101	910	2,7
295/35 R 20 XL	105	1020	3,1
315/35 R 20 XL	110	1165	3,1
325/35 R 20	108	1100	2,7
245/35 R 21 XL	96	780	3,1
255/35 R 21 XL	98	825	3,1
265/35 R 21 XL	101	910	3,1
275/35 R 21 XL	103	965	3,1
285/35 R 21 XL	105	1020	3,1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
35 series			
295/35 R 21	103	965	2,7
295/35 R 21 XL	107	1070	3,1
305/35 R 21 XL	109	1135	3,1
265/35 R 22 XL	102	935	3,1
275/35 R 22 XL	104	990	3,1
285/35 R 22 XL	106	1045	3,1
295/35 R 22 XL	108	1100	3,1
325/35 R 22	110	1165	2,7
325/35 R 22 XL	114	1300	3,1
285/35 R 23 XL	107	1070	3,1
295/35 R 23 XL	108	1100	3,1
305/35 R 24 XL	112	1230	3,1
315/35 R 24 XL	114	1300	3,1
30 series			
255/30 R 18 XL	90	660	3,1
285/30 R 18	93	715	2,7
295/30 R 18	94	735	2,7
295/30 R 18 XL	98	825	3,1
245/30 R 19 XL	89	640	3,1
255/30 R 19 XL	91	675	3,1
265/30 R 19 XL	93	715	3,1
275/30 R 19 XL	96	780	3,1
285/30 R 19 XL	98	825	3,1
295/30 R 19	96	780	2,7
295/30 R 19 XL	100	880	3,1
305/30 R 19 XL	102	935	3,1
325/30 R 19 XL	105	1020	3,1
235/30 R 20 XL	88	615	3,1
245/30 R 20 XL	90	660	3,1
255/30 R 20 XL	92	695	3,1
265/30 R 20 XL	94	735	3,1
275/30 R 20 XL	97	805	3,1
285/30 R 20 XL	99	855	3,1
295/30 R 20 XL	101	910	3,1
305/30 R 20 XL	103	965	3,1
335/30 R 20 XL	108	1100	3,1
245/30 R 21 XL	91	675	3,1
255/30 R 21 XL	93	715	3,1
265/30 R 21 XL	96	780	3,1
275/30 R 21 XL	98	825	3,1
285/30 R 21 XL	100	880	3,1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pres- sure (bar)
Passenger Car Tyres			
30 series			
295/30 R 21 XL	102	935	3,1
315/30 R 21 XL	105	1020	3,1
325/30 R 21 XL	108	1100	3,1
265/30 R 22 XL	97	805	3,1
285/30 R 22 XL	101	910	3,1
295/30 R 22 XL	103	965	3,1
315/30 R 22 XL	107	1070	3,1
305/30 R 23 XL	105	1020	3,1
335/30 R 23 XL	111	1200	3,1
25 series			
315/25 R 19 XL	98	825	3,1
285/25 R 20 XL	93	715	3,1
295/25 R 20 XL	95	760	3,1
305/25 R 20 XL	97	805	3,1
325/25 R 20 XL	101	910	3,1
275/25 R 21 XL	92	695	3,1
295/25 R 21 XL	96	780	3,1
305/25 R 21 XL	98	825	3,1
325/25 R 21 XL	102	935	3,1
305/25 R 22 XL	99	855	3,1
335/25 R 22 XL	105	1020	3,1
315/25 R 23 XL	102	935	3,1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	PR	LI	Max ^{*)} Load capacity kg	Inflation pressure (bar)
Commercial-C-tyres ^{*)}				
13 inch				
165 R 13 C	6	91	645	3,75
165/70 R 13 C	6	88	590	3,75
14 inch				
175 R 14 C	8	99	815	4,5
185 R 14 C	6	99	815	3,75
	8	102	895	4,5
195 R 14 C	8	106	1000	4,5
205 R 14 C	8	109	1080	4,5
215 R 14 C	8	112	1175	4,5
165/75 R 14 C	8	97	765	4,75
185/75 R 14 C	8	102	895	4,75
195/75 R 14 C	8	106	1000	4,75
165/70 R 14 C	6	89	610	3,75
175/70 R 14 C	6	95	725	3,75
195/70 R 14 C	8	101	865	4,75
175/65 R 14 C	6	90	630	3,75
15 inch				
185 R 15 C	8	103	920	4,5
195 R 15 C	8	106	1000	4,5
215/80 R 15 C	8	111	1145	4,75
245/75 R 15 C	6	109	1080	3,75
195/70 R 15 C	6	100	840	3,75
	8	104	945	4,5
205/70 R 15 C	8	106	1000	4,5
215/70 R 15 C	8	109	1080	4,5
225/70 R 15 C	6	109	1080	3,75
	8	112	1175	4,5
185/65 R 15 C	6	97	765	3,75
205/65 R 15 C	6	102	895	3,75
215/65 R 15 C	6	104	945	3,75
185/60 R 15 C	6	94	705	3,75
185/55 R 15 C	6	90	630	3,75
16 inch				
235/85 R 16 C	8	114	1240	4,75
	10	120	1470	5,75
205 R 16 C	8	110	1115	4,5
175/75 R 16 C	8	101	865	4,75

^{*)} 14, 15 and small 16 to 18 inch C tyres with treads like pass. car tyres for service on delivery vans.

For other C tyres, see Technical Databook for truck tyres.

^{**) also for C tyres: Load capacity per tyre (single fitment).}

Tyre size	PR	LI	Max ^{*)} Load capacity kg	Inflation pressure (bar)
Commercial-C-tyres ^{*)}				
16 inch				
185/75 R 16 C	8	104	945	4,75
195/75 R 16 C	8	107	1025	4,75
	10	110	1115	5,25
205/75 R 16 C	8	110	1115	4,75
	10	113	1210	5,25
215/75 R 16 C	8	113	1210	4,75
	10	116	1315	5,25
225/75 R 16 C	8	116	1315	4,75
	10	118	1385	5,25
		121	1525	5,75
215/70 R 16 C	6	108	1050	3,75
195/65 R 16 C	6	100	840	3,75
	8	104	945	4,75
205/65 R 16 C	6	103	920	3,75
	8	107	1025	4,75
215/65 R 16 C	4	102	895	3,75
	6	106	1000	3,75
	8	109	1080	4,75
225/65 R 16 C	8	112	1175	4,75
235/65 R 16 C	8	115	1275	4,75
	10	118	1385	5,25
		121	1520	5,75
285/65 R 16 C	10	128	1890	5,25
195/60 R 16 C	6	99	815	3,75
205/60 R 16 C	6	100	840	3,75
215/60 R 16 C	6	103	920	3,75
225/60 R 16 C	6	101	865	3,25
		105	970	3,75
	8	111	1145	4,75
17 inch				
205/70 R 17 C	10	115	1275	5,25
185/60 R 17 C	6	96	745	3,75
215/60 R 17 C	6	104	945	3,75
	8	109	1080	4,75
235/60 R 17 C	10	117	1350	5,25
225/55 R 17 C	6	104	945	3,75
	8	109	1080	4,75
255/55 R 17 C	10	118	1390	5,25
18 inch				
255/55 R 18 C	8	116	1315	4,75
	10	120	1470	6,0

The rim is the part of the wheel which supports the tyre.

1. Important elements of the rim

Rim flange = lateral support for the tyre bead

Flange distance = clear rim width

Bead seat = base on which the tyre bead is seated

Well = inner side of the rim

Diameter = specified diameter flange / bead seat

Hump = continuous raised section of the rim bead seat which enables a better fitting of tubeless tyre beads at **low pressure***).

2. Types of rims

The well-base rim is virtually the only type of rim used on cars, caravans and other car trailers:

Well-base rims = one-piece rims, deepened well for easier tyre fitting, 5 °tapered bead seat, “x” in the wheel size designation.

Virtually only J and B versions of the well-base rim are used and these are explained here in more detail.

If rubber valves (snap-in type) are used on rims for higher speeds, these must be fitted with **valve supports** where necessary. Also refer to the section “Fitting the tyre”.

3. Wheel disc (nave)

The wheel disc is the linking element between the rim and the axle hub. Of all the measurements for wheel linking elements – centre bore and bore diameter, bolt hole type and **offset depth** – the latter is a particularly important factor for the free movement of the tyre in any wheel position.

(Offset depth = 0, when the rim centre and hub contact area of the wheel disc are in line).

4. Wheel strength

The wheel manufacturer must confirm that the wheel strength is adequate for each particular application.

5. Lateral and true running of the wheels (without tyres)

On cars which are virtually all able to considerably exceed 100 km/h (62 mph), it is particularly important that the wheels of the vehicle are **well-centred**.

There should be as little radial and lateral run-out as possible on both bead seat / flange sides of the rim, in order to achieve **good smooth running**.

The standard shows max. tolerances of 1.20 mm. This dimension is for the centre of the tyre seat area or the centre of the flange height. All measurements, particularly the **uniformity**, should be well within these tolerances.

*) Safety shoulders (e. g. hump) are prescribed for tubeless radial car tyres. They should also be used for tubeless light truck C tyres with a 14 to 18 inch code for the rim diameter.

R_4 and R_5 : between

4 and 10 mm


R_5 : not larger than 10 mm

Valve Hole-Ø:

11.5 mm (11.3 $_{-0}^{+0.4}$ centrally
in the side of the rim well.

16.0 mm (15.7 mm $_{-0}^{+0.4}$)

only with Ø-Code 15.

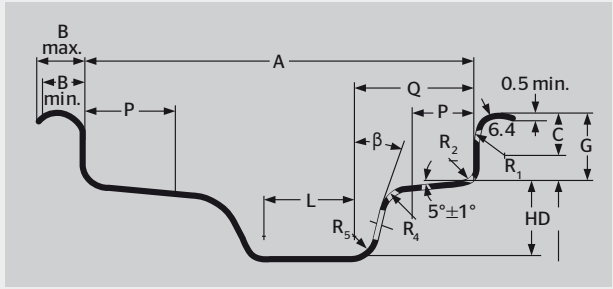

Rim Contour	Dimensions (mm)														
	A		B		G	P	H	L	Q	R ₁	R ₂	β			
			Min.	Max. 1)	± 0,6	Min.	Min. 2)	Min.	Max.	Min.	Max.	Min.			
3.00 B	76	± 1	10	13	14.1	13	15	15	16	7.5	4.5	10°			
3.50 B	89					15			19			34	13°		
4.00 B	101.5					19.5			22			45			
4.50 B	114.5														
5.00 B	127														
5.50 B	139.5														
6.00 B	152.5	± 1.5	11	15	17.3	17.3	22	45	9.5	6.5	20°				
3 J	76											13	16	28	10°
3 ½ J	89											15	19	34	
4 J	101.5											19.5	22	45	
4 ½ J	114.5														
5 J	127														
5 ½ J	139.5														
6 J	152.5														
6 ½ J	165														
7 J	178														
7 ½ J	190.5														
8 J	203														
8 ½ J	216														
9 J	228.5														
9 ½ J	241.5														
10 J	254														
10 ½ J	266.5														
11 J	279.5														
11 ½ J	292														
12 J	305														
12 ½ J	317.5														
13 J	330														

¹⁾ B max. values may be exceeded on rims for light commercial vehicles



²⁾ Minimum dimensions for well depth (H) and well angle are required for tyre mounting

Rim diameter

Code (ins)	12	13	14	15	16	17	18	19	20	21	22	23	24
D (mm)	304.0	329.4	354.8	380.2	405.6	436.6	462.0	487.4	512.8	538.2	563.6	589.0	614.4

Special rim executions for passenger cars

In many countries safety rims must be used for tubeless radial tyres.

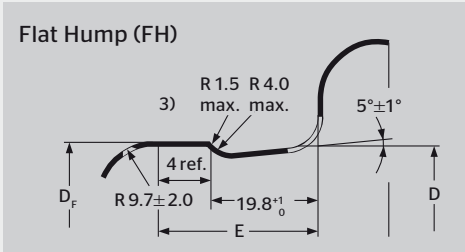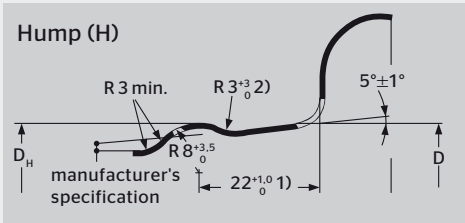


¹⁾ In most car rims 19.8 mm.

²⁾ For B-Rims R = 8.5 mm max. resp. R = 4 ±1 mm.


³⁾ Deburred.

These **full-drop centre rims with safety shoulders** for cars, estate cars and light trucks are marked with the following-codes shown after rim size designation:

- H** = one-sided round hump on outer shoulder (formerly: H 1)
- H2** = double round hump
- FH** = flat hump on outer shoulder (formerly: FHA 1)
- FH2** = double flat hump (formerly: FHA 2)
- CH** = combination hump = flat hump on outer shoulder, round hump on inner shoulder (formerly: FHA-H)
- SL** = special ledge
- EH2/2+** = Extended Hump (with extended hump on both sides) (see following page)

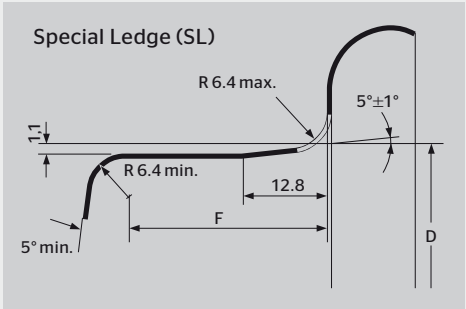


Ledge	Rim diameter Code (ins))	Dimensions (mm)		
		H	FH	
		Circumference $\pi \cdot D_H (+ 0/-3)$	Circumference $\pi \cdot D_F (+ 0/-3)$	E Max.
B	12	957.6	-	-
	13	1037.0	1034.8	24.5
	14	1116.8	1114.6	
J	13	1037.0	1034.8	28.5
	14	1116.8	1114.6	
	15	1196.6	1194.4	
	16	1276.4	1274.2	
	17	1373.8	1371.6	
	18	1453.6	1451.4	
	19	1533.4	1531.2	
	20	1613.2	1611.0	
	21	1693.0	1690.8	
	22	1772.8	1770.6	
	23	1852.6	1850.4	
	24	1932.4	1930.2	

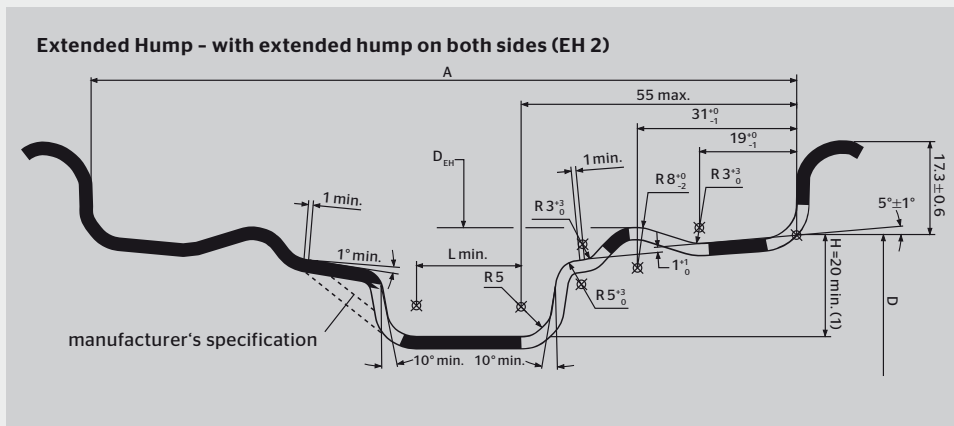

This contour is valid for rim sizes from 5 ½ J to 13 ½ J

(1): $H > 22$ necessary for automatic fitting two beads at once

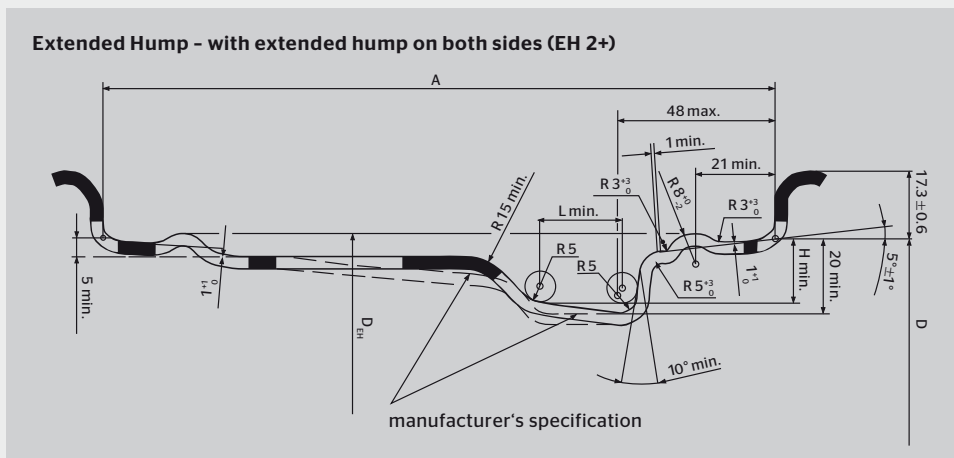

Extended Hump circumference

Rim diameter Code (ins)	Extended Hump circumference (mm) $\pi \cdot D_{EH}$ (+ 0/-3)
15	1204.2
16	1284.0
17	1381.2
18	1461.0
19	1540.8
20	1620.6
21	1700.4

**SAFETY WARNING!**

The following instructions must be observed to ensure vehicle safety at all times. Disregarding the fitting instructions could endanger

the safety of the tyre fitter or driver. This applies in particular to inflation pressure. Non-compliance with these instructions means risking tyre damage which, if serious enough, may result in a tyre bursting. It is an hazard like this that can cause traffic accidents involving vehicle damage and / or serious personal injury.

Correct choice of tyre and wheel

Tyres should only be chosen in accordance with vehicle documents and recommendations of the tyre manufacturer.

The dimensions and service descriptions of SSR runflat tyres*) (see [page 23](#)) correspond to those of standard tyres of the same size and construction. SSR tyres may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system (TPMS).

Do not mix SSR runflat tyres with standard tyres.

If tyres are changed to a different size, all legal requirements and regulations, as well as the recommendations of the vehicle, wheel and tyre manufacturers must be complied with. In any event, the freedom of motion of the wheel and adequate load capacity of the tyre must be observed.

Tyre sizes and rims not entered in the vehicle registration document may only be fitted if the vehicle and tyre manufacturer issue a certificate of non-objection or if a public authority issues fitting approval after an inspection by an officially authorised expert **).

80 and 82 series passenger car tyres of the same size can be interchanged without new approval and without any new entry in the vehicle documents if Load Index (LI) and Speed Symbol (SSY) of the interchanging size are of an equivalent or higher-grade quality. Example: 155/80 R 13 79 T replaces 155 R 13 79.

Mixed tyre constructions (radial or cross-ply) for cars, caravans and other car trailers are not permitted: Tyres fitted on any one vehicle must all be either radial or cross-ply. (Exception: Use of the spare tyre in an emergency).

The same applies to the choice of wheels (rims): The standard wheels approved by the vehicle manufacturer must be used as recommended.

The tyre widths given in the tables on [pages 26-67](#) and [80-91](#) refer to the measuring rim (bold print in the tables). In the event of a change in the rim width by + ½ inch, the tyre width changes by approx. + 5 mm.

Winter tyres

Winter tyres are clearly superior in the cold months of the year; they offer a wider margin of safety and better economy when the temperature drops below 7 ° C.

Winter tyres approved for a max. speed lower than that of the vehicle may only be fitted if the max. speed of these tyres is displayed in full view of the driver, e. g. on a clearly visible sticker on the dashboard. This maximum tyre speed must not be exceeded.

*) only available for tyre brand Continental

**) Exception: This does not apply to the UK

A combination of summer and winter tyres on passenger cars is not recommended.

Winter tyres have to meet special requirements, meaning that the legal minimum tread depth of 1.6 mm is inadequate. The suitability for winter use depends significantly on the tyres' tread depth. In the interest of safety, Continental recommends replacing winter tyres before the tread depth drops below 4 mm for winter service.

Top safety in winter can be provided only by true winter tyres on all axle positions (4 tyres).



Snowflake designation: This additional marking on an M + S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

Brittleness temperature of rubber compounds – passenger tyres

Several performance aspects of tyres are influenced by temperature. For example traction (wet and dry), rolling resistance, mileage and ride comfort.

To achieve optimum performance, Continental therefore recommends that winter tyres be used at temperatures below + 7 ° C and summer tyres at temperatures above + 7 ° C.

All-season tyres with M + S marking, although a compromise in certain performance aspects, are suitable for use in hot and cold temperatures.

The tread patterns and rubber compounds used in the above mentioned tyres are specifically designed and developed to offer optimum performance within the temperature range for which they are intended.

Summer tyres – especially Ultra High Performance (UHP) tyres

The highly developed, specialized tread compounds used in such tyres are designed to provide the highest possible levels of grip at ambient temperatures above + 7 ° C.

Such tread compounds are however **very sensitive to temperature**.

Permanent damage may occur to the tread compounds of such tyres if they are used at temperatures below – 20 °.

At this temperature, the tread compounds of UHP summer tyres may lose their elasticity and become brittle (the so-called brittleness point). When this occurs and the tyre is flexed, the tread compound may crack.

Therefore, UHP summer tyres should not be used at temperatures below – 20 ° C. Continental group tyres with an M + S marking on the sidewall are suitable for use down to – 45 ° C.



Fitting the tyre

SAFETY WARNING!

If a tyre is not properly fitted it may burst. The energy released in a blow-out can cause fatal injuries so tyres must be fitted by an expert.

Only approved fitting tools and lubricants may be used. Observe all fitting instructions.

Because of the special technology involved, SSR runflat tyres^{*)} may be mounted and removed only by specifically trained workshops that have been certified by Continental (see [page 23](#)).

Detailed mounting instructions for SSR runflat tyres^{*)} under www.conti-ssr.uk

ContiSeal™ and ContiSilent™ tyres^{*)} do not differ from standard tyres in aspects such as mounting, demounting, inflating, and balancing. For detailed information see [page 24 / 25](#) and www.contiseal.com resp. www.continental-tires.com/car/technology/contisilent

Before the old tyre is taken off the valve insert must be unscrewed and removed to ensure all air has escaped.

When removing tyres sealed with sealant (e. g. ContiMobility Kit^{*)}) pay special attention to the following:

The tyre could contain up to ½ litre liquid sealant. Therefore:

- › Wear PE gloves when removing the tyre and make sure that the work area is well ventilated (to prevent odour build-up).
- › Make certain that the tyre is fully deflated before removal.
- › Move the wheel carefully so the sealant can collect at the lowest point in the tyre. Drain all of the sealant before removing the tyre.
- › Dispose of remaining sealant in compliance with national regulations.

The new tyre and rim must have matching diameters and be approved as a combination for the vehicle model concerned. Only rims of the correct size in perfect condition and free of rust should be used. They must not be damaged, out of shape or worn. This applies in particular in combination with SSR runflat tyres^{*)}.

When fitting new tube-type tyres, always use **new tubes**. As tubes stretch in service, there is a risk of folds forming in old tubes, so re-used tubes could suddenly tear.

For safety reasons, tubeless tyres should always be fitted with **new valves**.

If rubber valves (snap-in types) are used for tubeless tyres, the vehicle manufacturer's instructions must be complied with in all cases. A **valve support** (i. e. a stopper on the rim itself or the hubcap) should be fitted, if H, V, W or Y tyres are specified for the vehicle. This ensures that valves are not forced off at high speeds.

Always coat the tyre beads and the rim with a **fitting lubricant** recommended by the tyre manufacturer. This applies in particular to low section tyres and SSR runflat tyres^{*)}. Never use greases or other hydrocarbons for this purpose.

While the tyre is being inflated, the wheel must remain firmly secured on the mounting machine. **Never inflate an unsecured tyre.**

^{*)} only available for tyre brand Continental

Keep a reasonable distance from any tyre that is being inflated. Make use of a sufficiently long and secured extension hose with an integrated pressure gauge. **Never bend over a tyre while it is being inflated.**

When fitting tubeless car tyres, care should be taken to ensure that the tyre beads coming from the well-base first clear the hump in the rim shoulder. To avoid cracks in the bead core, the “pop” pressure necessary should not exceed 3.3 bar. If the tyre does not pop into place even at this pressure, the pressure must be lowered, and the cause identified and eliminated. Then the procedure can be repeated.

Only when the tyre beads are seated correctly on the rim shoulder may the pressure be increased to achieve the required press-fit and firm grip on the rim flanges. However, this “**fitting pressure**” should not exceed 150 % of the max. pressure given in the tables or be more than 4.0 bar. After this, adjust the pressure to the **operating pressure** specified by the vehicle manufacturer (also see Continental tyre pressure table).

Car tyres should be **dynamically balanced**.

Fitting the wheel to the vehicle

If the tyres exhibit uneven wear then the axle geometry should be checked and corrected if necessary.

SSR runflat tyres*) may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system.

Valves should be fitted with **valve caps** – preferably with a sealing ring – as they protect the delicate **valve inserts** and the inside of the tyre.

When mounting **wheel caps and wheel trim rings**, sufficient clearance to the tyre sidewall must be maintained. The wheel cap or wheel trim ring may not come in contact with the tyre under any operating conditions. This applies in particular to tyres with rim protection (flange ribs “FR”).

Directional tyres must be fitted so that they roll in the direction of the arrow on the sidewall as the vehicle moves forward.

Exception: For a short-term use as a temporary fitment spare; but revert to specified fitted position at the earliest possible opportunity!

Asymmetrical tyres must be fitted with the sidewall ‘Outside’ on the outside of the vehicle so that their asymmetrical treads can be used to best effect.

Tyre pressure



SAFETY WARNING!

Incorrect tyre pressure can lead to the inside of the tyre being damaged. This can result in tyre failure or even a blowout. Hidden tyre damages are not rectified by adjusting the tyre pressure.

*) only available for tyre brand Continental

Table 1:

Load capacities and tyre pressures - standard load car tyres

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph)
and camber angles not greater than 2 °)

Load Index	Load capacity (kg) at tyre pressure (bar)					
	2.0	2.1	2.2	2.3	2.4	2.5
62	220	230	240	250	255	265
63	230	235	245	255	265	272
64	235	245	255	260	270	280
65	245	250	260	270	280	290
66	250	260	270	280	290	300
67	255	265	275	285	295	307
68	265	275	285	295	305	315
69	270	285	295	305	315	325
70	280	290	300	315	325	335
71	290	300	310	325	335	345
72	295	310	320	330	345	355
73	305	315	330	340	355	365
74	315	325	340	350	365	375
75	325	335	350	360	375	387
76	335	350	360	375	385	400
77	345	360	370	385	400	412
78	355	370	385	400	410	425
79	365	380	395	410	425	437
80	375	390	405	420	435	450
81	385	400	415	430	445	462
82	395	415	430	445	460	475
83	405	425	440	455	470	487
84	420	435	450	470	485	500
85	430	450	465	480	500	515
86	445	460	480	495	515	530
87	455	475	490	510	525	545
88	470	485	505	525	540	560
89	485	505	525	545	560	580

Load capacities and tyre pressures - standard load car tyres

Load Index	Load capacity (kg) at tyre pressure (bar)					
	2.0	2.1	2.2	2.3	2.4	2.5
90	500	520	540	560	580	600
91	515	535	555	575	595	615
92	525	550	570	590	610	630
93	545	565	585	610	630	650
94	560	585	605	625	650	670
95	575	600	625	645	670	690
96	595	620	640	665	685	710
97	610	635	660	685	705	730
98	625	650	675	700	725	750
99	650	675	700	725	750	775
100	670	695	720	750	775	800
101	690	720	745	770	800	825
102	710	740	765	795	825	850
103	730	760	790	820	845	875
104	755	785	815	840	870	900
105	775	805	835	865	895	925
106	795	825	860	890	920	950
107	815	850	880	910	945	975
108	835	870	905	935	970	1000
109	860	895	930	965	995	1030
110	885	920	955	990	1025	1060
111	910	950	985	1020	1055	1090
112	935	975	1010	1050	1085	1120
113	960	1000	1040	1075	1115	1150
114	985	1025	1065	1105	1140	1180
115	1015	1055	1095	1135	1175	1215
116	1045	1085	1130	1170	1210	1250

Table 2:
Load capacities and tyre pressures - Reinforced and Extra Load (XL) car tyres

Load Index	Load capacity (kg) at tyre pressure (bar)									
	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9
79	325	340	350	365	375	390	400	415	425	437
80	335	350	360	375	385	400	410	425	440	450
81	345	355	370	385	395	410	425	435	450	462
82	355	365	380	395	410	420	435	450	460	475
83	360	375	390	405	420	430	445	460	475	487
84	370	385	400	415	430	445	460	470	485	500
85	385	400	415	430	445	455	470	485	500	515
86	395	410	425	440	455	470	485	500	515	530
87	405	420	435	455	470	485	500	515	530	545
88	415	435	450	465	480	495	515	530	545	560
89	430	450	465	480	500	515	530	550	565	580
90	445	465	480	500	515	535	550	565	585	600
91	455	475	495	510	530	545	565	580	600	615
92	470	485	505	525	540	560	575	595	615	630
93	485	500	520	540	560	575	595	615	630	650
94	500	520	535	555	575	595	615	635	650	670
95	515	535	555	575	595	615	630	650	670	690
96	525	550	570	590	610	630	650	670	690	710
97	540	565	585	605	625	650	670	690	710	730
98	555	580	600	625	645	665	685	710	730	750
99	575	600	620	645	665	690	710	730	755	775
100	595	620	640	665	690	710	735	755	780	800
101	615	635	660	685	710	735	755	780	800	825
102	630	655	680	705	730	755	780	805	825	850
103	650	675	700	725	750	775	800	825	850	875
104	670	695	720	750	775	800	825	850	875	900
105	685	715	740	770	795	820	850	875	900	925
106	705	735	760	790	815	845	870	895	925	950
107	725	755	780	810	840	865	895	920	950	975
108	745	770	800	830	860	890	915	945	970	1000
109	765	795	825	855	885	915	945	975	1000	1030
110	785	820	850	880	910	940	970	1000	1030	1060
111	810	840	875	905	935	970	1000	1030	1060	1090
112	830	865	900	930	965	995	1025	1060	1090	1120
113	855	890	920	955	990	1020	1055	1085	1120	1150
114	875	910	945	980	1015	1050	1080	1115	1145	1180
115	905	940	975	1010	1045	1080	1115	1145	1180	1215
116	930	965	1000	1040	1075	1110	1145	1180	1215	1250
117	955	995	1030	1065	1105	1140	1180	1215	1250	1285
118	980	1020	1060	1095	1135	1170	1210	1245	1285	1320
119	1010	1050	1090	1130	1170	1210	1245	1285	1320	1360
120	1040	1080	1120	1165	1205	1245	1285	1320	1360	1400

The tyre must be inflated to the pressure specified by the vehicle and tyre manufacturer. This varies depending on the load and service conditions.

The pressure always refers to the cold tyre and must not be allowed to fall below this value.

The pressure inside warm tyres - driving causes heat build-up - is naturally higher. So never reduce the pressure of warm tyres. Once they cool down, their pressure could fall below the specified **minimum tyre pressure**.

The tyre pressure must be checked and adjusted regularly every 14 days on the cold tyre. The spare tyre may not be forgotten.

Incorrect tyre pressure causes premature and / or uneven tread wear. **Under-inflated** tyres have a higher **rolling resistance**, and this means a higher **fuel consumption**. In extreme cases underinflation may result in tyre failure.

The tyre pressure values for car tyres given in table 1 and 2 are **minimum pressures** for speeds up to 160 km/h (100 mph). They may be increased, for example, for reasons of driving stability. Please refer to the recommendation of the vehicle manufacturer.

3.2 bar is the **maximum tyre pressure** on standard version car tyres up to and including Speed Symbol T; 3.5 bar for H-, V-, W-, Y, as well as XL / Reinforced tyres. **These values may not be exceeded.**

ZR tyres without service description have from 160 km/h (100 mph) to 190 km/h (118 mph) inclusive the stated pressure of 2.5 bar. Then the inflation pressure must be increased by 0.1 bar for each 10 km/h (6 mph) up to 3.5 bar at 240 km/h (150 mph) under full load and maximum 2 ° wheel camber.

Table 3:
For **higher speeds** the **tyre pressure** should be **increased** in regard of the load capacity
(taken from the ETRTO Standards Manual):

Speed capacity of the vehicle (incl. tolerance, about 9 km/h, 6 mph)	Speed Symbols								
	Q	R	S	T	U	H	V	W	Y
	Tyre pressure ^{*)} (bar)								
≤160	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
170		2.6	2.6	2.6	2.6	2.6	2.6	2.5	2.5
180			2.6	2.6	2.6	2.6	2.6	2.5	2.5
190				2.7	2.7	2.7	2.7	2.5	2.5
200					2.7	2.7	2.7	2.6	2.5
210						2.8	2.8	2.7	2.5
220							2.8	2.8	2.5
230							2.8	2.9	2.6
240							2.8	3.0	2.7
250								3.0	2.8
260								3.0	2.9
270								3.0	3.0
280									3.0
290									3.0
300									3.0

^{*)} at the maximum load of the tyre, up to 2 ° wheel camber

Load capacity and speed

When determining the minimum tyre size necessary for a vehicle, the permitted **axle load** and the **maximum design speed** of the vehicle must be used as a basis.

The maximum load capacity of a car tyre is expressed through its **Load Index (LI)** (see [page 8](#)).

Table 4:

Percentage of load capacity versus speed ¹⁾

(taken from the ETRTO Standards Manual):

Speed capacity of the vehicle (incl. tolerance, about 1 % V_{max} + 6,5 km/h) (km)	Speed Symbols				
	H	V	W	Y	(Y)
	%				
210	100	100	100	100	100
220	-	97	100	100	100
230	-	94	100	100	100
240	-	91	100	100	100
250	-	-	95	100	100
260	-	-	90	100	100
270	-	-	85	100	100
280	-	-	-	95	³⁾
290	-	-	-	90	³⁾
300	-	-	-	85	³⁾
>300 ²⁾	-	-	-	-	³⁾

¹⁾ For intermediate maximum speeds, linear interpolation of the tyre load capacity is permitted.

²⁾ For speeds over 300 km/h (187 mph), the relevant inflation pressures will be agreed between vehicle and tyre manufacturers (or their national associations), taking into consideration the vehicle characteristics and the type of service.

³⁾ (Y) tyres fulfill the requirements of Y tyres and could even be higher depending on the maximum speed. The load capacity of (Y) tyres has to be confirmed by the tyre manufacturer.

(For **ZR tyres** (production until Nov, 2014) without service description the maximum load capacity given in the tables from [page 26](#) onwards applies to speeds up to 240 km/h (150 mph).

For speeds over 240 km/h (150 mph) please refer to us for load capacity and tyre pressure.)

If car tyres are to be used on a vehicle with a **wheel camber** of over 2 °, please check load capacity and tyre pressure with us.

The load capacity of tyres in **twin fitment** is 1.85 times the load capacity of a single tyre.

The **load capacities** in the tables for car tyres can be increased if the tyres are fitted on vehicles with **the following low type-related** max. speeds and if the inflation pressure is increased at the same time (taken from the ETRTO Standards Manual):

Max.speed capability	(km/h)	60	50	40	30	25
Load capacity	(%)	110	115	125	135	142
Inflation pressure increase	(bar)	0.1	0.2	0.3	0.4	0.5

Tyre damage

Most tyre damage is caused by incorrect tyre pressure, so we recommend a regular tyre pressure check every 2 weeks. When the car has been driven and the tyres are warm, it is normal for the tyre pressure to increase. Never bleed warm tyres.

A balanced, even **style of driving** is beneficial for the tyres and the environment. Harsh acceleration, braking and fast cornering shorten the **service life** of tyres.

This applies equally to other types of **tyre usage** such as severe scuffing along the kerb, or driving over obstacles. This can cause hidden or visible **damage** to tyres.

Vibrations of the steering wheel could point to tyre damage. All the vehicle's tyres should be checked immediately for damage.

Overstressing of tyres (excessive speed or overloading), is to be avoided. This has the same critical effect as **under inflation** and can cause heat damage to the tyre.

Tyre rotation on a vehicle

The tyres on a vehicle should be rotated regularly to help ensure even wear and maximum tread life.

Tyres should be rotated as instructed in the vehicle owner's manual, with special attention being given to the **recommended interval for rotating tyres**. Unless otherwise specified by the vehicle manufacturer, tyres should be rotated every 10,000 to 12,000 kilometers - or even earlier if the tread shows signs of uneven wear. In the latter case, the vehicle's wheel alignment and pertinent mechanical components should be checked and corrected, if need be.

Full-size **spare tyres** (not temporary spares) of the same size and design as the tyres in use on the vehicle should be included in the tyre rotation. In conjunction with the rotation, the full-size spare tyre's inflation pressure should be checked and, if need be, corrected.

A tyre's **inflation pressure** must correspond to what is specified in the vehicle owner's manual for the respective tyre position (recommended inflation pressure may differ for the front- and rear axle tyres).

Tyre rotation may effect the **tyre pressure monitoring system** (TPMS). The vehicle owner's manual or a qualified service professional should be consulted in the event that the TPMS has to be adjusted or recalibrated.

The **rolling direction** of directional tyres should not be reversed when the tyres are rotated.

Mixing tyres should be avoided

Tyre size, Load Index (LI) and Speed Symbol (SSY) at all wheel positions should be in accordance with the vehicle manufacturer's specification. In many countries, this is a legal requirement.

Driving with a non-recommended mix of tyre sizes, designs and Speed Symbols can be dangerous. In the event that tyres of different sizes, designs, Load Index or Speed Symbol are to be fitted on a vehicle, the vehicle manufacturer's recommendations should be heeded and / or the advice of a qualified tyre specialist sought. Some vehicles leave the factory with different tyre sizes on the front and rear axles. This configuration must not be changed unless approved by the vehicle manufacturer.

No more than one temporary spare*) should be used on a vehicle at any one time. A tyre of this kind may only be driven up to a maximum speed of 80 km/h and is intended for temporary use, as indicated on the tyre sidewall and / or on a label attached to the tyre or the wheel.

Mounting new tyres on the rear axle

It is recommended that all tyres used on the vehicle be replaced at the same time. If this is not the case, at least all the tyres on the same axle should be replaced at the same time.

If only one axle set of tyres is replaced, it is recommended to fit the newest tyres on the rear axle.

Additional important tips regarding tyre position

The **spare tyre's** date of manufacture and condition (e. g. signs of cracking, remaining tread depth) should be checked regularly.

For 4-wheel drive and All Wheel drive vehicles, any special tyre fitment requirements in the vehicle owner's manual should be heeded - especially if the vehicle is equipped with electronic systems such as antilock brakes, traction control or stability control. Damage to the vehicle or its transmission can result if these requirements are not followed.

Winter tyres should be fitted to all wheel positions. They should not be mixed with all-season or summer tyres.

*) only available for tyre brand Continental.
See [page 68 ff.](#)

Tyre Storage Recommendations

These recommendations are intended for consumers, but they are also important for tyre dealers. For commercial applications of new and waste tyres (tyre dealers and fleets), there may be more stringent and legal restrictions. Please check local regulations.

ContiSeal™ tyres^{*)} should be stored under the same conditions as recommended here for non-ContiSeal™ tyres.

Due to the sticky nature of the inside of ContiSeal™ tyres, do not place any objects or material inside the tyre as they may become stuck and subsequently difficult to remove without damage to the tyre.

Tyres are compounded to resist normal deterioration caused e. g. by sunlight, humidity and ozone. Nevertheless, stored tyres should be protected against these and other potentially damaging conditions.

The longer the storage period, the more exposure there is to potential damage.

After dismounting from a vehicle the tyres should be thoroughly cleaned and inspected for damage. Remove all stones and debris from the grooves. Chalk marking the tyres with their wheel positions (FL for Front Left, RR for Rear Right, etc.) will help to find the correct positions according the rotational plan.

General:

- › RDO STORE TYRES where it is clean, dry and moderately ventilated.
- › **Moist conditions** should be avoided. Tyres destined for retreading / repairing should be thoroughly cleaned and dried out before such operations are performed.
- › DO STORE TYRES at **temperatures** not exceeding 35 ° C (95 F), preferable below 25 ° C (77 F). Direct contact with hot pipes and radiators must be avoided.
- › Also deep temperatures below the freezing point might lead to brittleness and tyres should be carefully warmed up before mounting.
- › DO STORE TYRES, if outdoors, protected by an opaque waterproof covering. **This is mandatory for ContiSilent™ tyres.** Avoid creating a heat box or steam bath. Ensure proper ventilation.
- › DO STORE TYRES, if outdoors, where tyres are raised off the storage surface.
- › **AVOID STORING TYRES** on piers, ship decks, or other unprotected areas.
- › **AVOID STORING TYRES**, where they can be damaged by passing objects - lawn mower, bicycle, or garden tools.
- › **AVOID STORING TYRES** where the area is wet, oily, and / or greasy such as with gasoline or petroleum-based products. Also, do not store on or against sensitive surfaces where staining can take place.

^{*)} only available for tyre brand Continental

Tyres with rims

Inflated



Do not stand them upright

hang them



or pile them (restack every four weeks)

Tyres without rims



Do not pile them, or hang them

stand them upright and rotate them every four weeks
(on racks clear of floor)

- › **AVOID STORING TYRES** in the proximity of chemical agents like solvents, fuels, oils, hydrocarbons, paint, acids, disinfectants, etc.
- › **AVOID STORING TYRES** where subject to extreme temperatures, direct sunlight or artificial light with a high ultra-violet content. Room lighting with ordinary incandescent lamps is preferable to fluorescent tubes.
- Never** store them near battery chargers, ovens, or open fires.
- › **AVOID STORING TYRES** on black asphalt or other heat absorbent surfaces and on highly reflective surfaces (i. e., sand or snow covered ground).
- › **AVOID STORING TYRES** in the same area as an electric motor or other ozone generating source. If there is a question, check ozone levels to be sure they do not exceed 0.08 ppm.
- › **Do not** use tyres as a workbench or tool stand. Soldering irons, power drill and tools can damage a tyre.
- Never** put a burning cigarette on a pile of tyres.
- › **Do not** store other items on top of a tyre, especially where staining of the surface would be a concern.
- Loose tyres or tyres mounted on rims,**
but not installed on a vehicle:
- › DO STORE TYRES so that they retain their shape.
- › Mounted tyres should preferable be inflated to only 100 kPa (15 psi / 1 bar).
- › **Be sure to adjust the tyres to the recommended inflation pressure before mounting on the vehicle.**

Tyres installed on a vehicle in long term storage:

- › If possible, store the vehicle on blocks to remove all weight from the tyres and cover the tyres to protect them from environmental exposure.
- › If the vehicle cannot be raised, completely unload it to reduce the load on the tyres. The storage surface should be firm, reasonably level, well drained, and clean.
- › In cases where the tyres will be supporting the vehicle, it is permissible to inflate the tyres to the maximum pressure listed on the sidewall. Be sure to return the inflation pressure to recommended usage pressure before operating the vehicle.
- › In cases where the tyres will be supporting the vehicle, it is recommended that the vehicle be moved every month to reduce the risk of a 'flat spot'. If the tyres do develop "flat spots," these will usually disappear in a short period of service.

Tyre repair



SAFETY WARNING!

Serious injury or death may result from a tyre disablement that is caused by failing to observe the following safety and maintenance

information.

During its service life, a tyre undergoes a variety of different usage conditions and can be damaged in many different ways. This damage can result from punctures, impacts, cuts, etc. Tyre damage can reduce a tyre's structural integrity by, for example:

- › Air loss resulting in underinflated service conditions which lead to internal structural damage;
- › Direct damage to tyre components such as rubber and plies;
- › Exposure of internal materials to the outside environment and resulting degradation; and / or
- › Exposure of internal materials to pressurized air (Intra-carcass pressurization).

For these reasons, tyres should be regularly inspected by the consumer. An inspection of the tyres should also be incorporated during routine vehicle maintenance procedures. If tyre damage is suspected or found, it should be carefully assessed by a trained tyre specialist immediately.

ContiSeal™ tyres^{*)} are designed to seal punctures in the tread from objects no larger than 5 mm diameter. Thoroughly inspect the tyre according to national industry standards. Carefully remove any object from the tyre tread. Even if the tyre seals, if it is punctured, the tyre must be removed from the rim and inspected carefully according to industry standards to determine whether a permanent repair can be made or whether the tyre must be removed from service and scrapped. A permanent repair will require removal of the tyre from the rim and application of a repair method specifically approved for ContiSeal™ tyres.

Among others, the tyre repair specialist, Rema TipTop has developed and approved instructions for the repair of ContiSeal™ tyres which can be found on the following website: www.contiseal.com

A consumer should never repair a damaged tyre. Only a trained tyre specialist who can base his assessment on a thorough and comprehensive inspection of the specific tyre can determine whether an individual tyre is suitable for repair or should be removed from service. This assessment should also take into account the complete service life history of the tyre including inflation, load, operating conditions, etc. If the tyre specialist decides to repair the tyre, then he should strictly follow all appropriate national tyre industry repair standards regarding the inspection process and repair procedures. Continental is not responsible for the specialist's decisions or the repaired tyre. Continental advises if a tyre is returned under complaint and reason for the product's disablement is in any way associated with a repair, or the reason for repair the manufacturer's warranty is invalidated.

It is forbidden by law to regroove car tyres.

^{*)} only available for tyre brand Continental

Tyre service life for passenger car and light truck

The tyre industry has long recognized the consumers' role in the regular care and maintenance of their tyres. The point at which a tyre is replaced is a decision for which the owner of the tyre is responsible. The tyre owner should consider factors to include service conditions, maintenance history, storage conditions, visual inspections, and dynamic performance. The consumer should consult a tyre service professional with any questions about tyre service life.

The following information and recommendations are made to aid in assessing the point of maximum service life.

Tyres are designed and built to provide many thousands of miles of excellent service. For maximum benefit, tyres must be maintained properly to avoid tyre damage and abuse that may result in tyre disablement. The service life of a tyre is a cumulative function of the storage, stowing, rotation and service conditions, which a tyre is subjected to throughout its life (load, speed, inflation pressure, road hazard injury, etc.). Since service conditions vary widely, accurately predicting the service life of any specific tyre in chronological time is not possible.

The consumer plays an important role in tyre maintenance.

Tyres should be removed from service for numerous reasons, including tread worn down to minimum depth, damage or abuse (punctures, cuts, impacts, cracks, bulges, underinflation, overloading, etc). For these reasons tyres, including spares, must be inspected routinely, i. e., at least once a month. Regular inspection becomes particularly important the longer a tyre is kept in service. If tyre damage is suspected or found, Continental recommends that the consumer have the tyre inspected by a tyre service professional. Consumers should use this consultation to determine if the tyres can continue in service. It is recommended that spare tyres be inspected at the same time. This routine inspection should occur whether or not the vehicle is equipped with a tyre pressure monitoring system (TPMS).

Consumers are strongly encouraged to be aware of their tyres' visual condition. Also, they should be alert for any change in dynamic performance such as increased air loss, noise or vibration.

Such changes could be an indicator that one or more of the tyres should be immediately removed from service to prevent a tyre disablement. Also, the consumer should be the first to recognize a severe in-service impact to a tyre and to ensure that the tyre is inspected immediately thereafter.

Tyre storage, stowage and rotation are also important to the service life of the tyre. More information regarding proper storage, stowage and rotation is located in other Continental publications, which are available upon request and through its websites.

Tyre service life recommendation

Continental is unaware of any technical data that supports a specific tyre age for removal from service. However, as with other members of the tyre and automotive industries, Continental recommends that all tyres (including spare tyres) that were manufactured more than ten (10) years previous ¹⁾ be replaced with new tyres, even when tyres appear to be usable from their external appearance and if the tread depth may have not reached the minimum wear out depth. Vehicle manufacturers may recommend a different chronological age at which a tyre should be replaced based on their understanding of the specific vehicle application; Continental recommends that any such instruction be followed. Consumers should note that most tyres would have to be removed for tread wear-out or other causes before any proscribed removal period. A stated removal period in no way reduces the consumer's responsibility to replace tyres as needed.

Minimum removal tread depth for passenger and light truck tyres

1.6 mm is the most widely accepted minimum tread depth standard at which tyres should be removed from service. This standard has been adopted as a regulation by many of the world's national transportation authorities. As an indication to the consumer, there are tread wear indicator bars in the main grooves of the tyre that become level with the tread surface at approximately 1.6 mm of remaining tread.

In addition to acknowledging the above, Continental recommends that all passenger and light truck tyres in highway motor vehicle application be removed from service at the following tread depths:

- › **summer / high performance
tyres = 3 mm**
- › **winter tyres = 4 mm**

These recommendations are based upon Continental's testing as well as real world experience which shows that drivers can maintain the performance potential (e. g. wet grip) of their tyres by replacing them before they reach the **regulatory minimum tread depth of 1.6 mm.**

This applies especially to winter tyres for which winter driving properties such as snow traction are significantly reduced at tread depths below 4 mm.

¹⁾ Production code of tyres see [page 7](#).

Guidelines on tyre safety for drivers and vehicle operators (recommended for vehicle handbooks)

Tyres need to be properly handled if they are to keep you and other road users safe. So please note the following:

1. The **tyre pressure** must be as indicated in the operating instructions for your vehicle or as marked on the vehicle itself. The pressure applies to cold tyres; it must not be any lower. Tyres that have become warm, e. g. through driving, will increase in pressure. Never release air from warm tyres, or the pressure could fall below the minimum.

The pressure must be checked **every 14 days** when the tyres are cold. Don't forget to check the spare.

If the pressure is too low, heat may build up in the tyre and lead to internal damage.

At high speeds the tyre may fail as a result of previous internal damage. Tyre damage that cannot be seen is not put right simply by raising the pressure afterwards!

2. If you have to drive over kerbstones do it slowly and, if possible, at right angles. Don't drive up or against any steep or sharp-edged kerbstones or other objects (e. g. stones); this can lead to non-visible tyre damage which can cause problems later - **the tyre may fail when running at high speeds.**

3. Check tyres regularly for **damage**, such as stones, nails etc. that have penetrated the tyre, as well as any cuts, tears or bulges (in the sidewall). Foreign objects can also damage the inside of the tyre. Have your tyre dealer or specialist check your tyres if you are unsure of their condition. **Damaged tyres can burst.**
4. Never fit used tyres whose history you don't know. Remember that tyres age even when they are little used or not used at all. If you have a spare tyre and it has not been used for several years have it examined by a tyre specialist. We recommend that tyres (including the spare) should be removed from potential service if they were manufactured more than 10 years previous.
5. Check the **tread depth** of your tyres regularly. The lower the depth, the greater the **risk of aquaplaning**. Ensure that your tyres comply with the legally required tread depth.

- A** Ageing _____ 122-123
Aquaplaning _____ 123
- B** Brittleness temperature _____ 106
of rubber compounds
- C** Choice of tyre _____ 105
ContiMobilityKit _____ 72, 107
(tyre emergency set)
ContiSeal™ tyres _____ 11, 12, 13, 17, 18,
_____ 19, 20, 24, 107, 122
ContiSilent Technology _____ 10, 11, 15, 17, 25
CST (ContiSpareTyre) _____ 68-71
ContiTireSealant _____ 73
- D** Dimensions _____ 9, 26-67, 68-71, 80-90
DIN _____ 3
Directional tyres _____ 108, 116
DOT _____ 3, 7
- E** ECE _____ 3, 7
ETRTO _____ 113 ff.
- F** Fitting lubricant _____ 107
Fitting pressure _____ 108
Fuel consumption _____ 112
- H** H-rated tyres _____ 8, 107, 112, 113, 114
Higher grade tyres _____ 105
- I** Imprint _____ 4
Inflation pressure / _____ 3, 9, 108, 123
tyre pressure
ISO _____ 3, 9
- L** Load capacity _____ 8, 26-66, 68-71, 80-91,
_____ 92-100, 110-112, 113-114
Load Index _____ 8, 26-67, 68-71,
_____ 80-91, 109-111, 113
- M** Max. inflation pressure _____ 112
Max. speed _____ 7, 8, 113-114
Measuring rim _____ 26-67, 68-71, 80-91, 105
Min. (tyre) pressure _____ 112
Min. tread depth _____ 122
Mixed tyre fitments _____ 105
- N** New tyres _____ 3, 107
- O** Offset depth _____ 101
Operating conditions _____ 3
Operating instructions _____ 105-123
Operating measurements _____ 9, 26-67,
_____ 68-71, 80-90
Operating pressure _____ 108
Overloading _____ 115
Overstressing _____ 115
- P** Production code _____ 7
- R** Regrooving _____ 120
Reinforced _____ 7, 111
Replacing 82-series by 80 _____ 105
Rims / Wheels _____ 101-104, 105, 107
Rim codes _____ 103
Rim dimensions _____ 102-104
Rim width _____ 26-67, 68-71, 80-90
Rolling circumference _____ 9, 26-67,
_____ 68-71, 80-90
Rolling resistance _____ 112
Runflat tyres SSR _____ 10, 11, 12, 13, 15, 17,
_____ 18, 20, 23, 105, 107, 108

- S** Safety warning _____ 3, 105, 106, 108, 119
 Service description _____ 8, 26-67, 68-71, 80-90
 Service life _____ 3, 121
 Sidewall marking _____ 6, 7
 Size ranges
 passenger / SUV _____ 10ff.
 van tyres _____ 74ff.
 Snowflake designation _____ 7, 106
 Spare tyre _____ 8, 68-71, 116
 Speed _____ 8, 113f., 123
 Speed Symbol (SSY) _____ 8
 SSR runflat tyres _____ 10, 11, 12, 13, 15, 17,
 _____ 18, 20, 23, 105, 107, 108
 Static radius _____ 26-67, 68-71, 80-91
 Storage _____ 117
 Style of driving _____ 115
 Summer tyres _____ 10-16, 122
- T** Technical data _____ 26-67, 68-71, 80-91
 Temperature (use of tyres) _____ 106
 Trailers, car-drawn _____ 92-100
 Tread depth _____ 7, 106, 122
 Tubeless _____ 7
 TWI (Tread Wear Indicators) _____ 7
 Twin fitment _____ 114
 Tyre ageing _____ 121-123
 Tyre damages _____ 115, 119, 123
 Tyre emergency set _____ 72, 107
 ContiMobilityKit
 Tyre fitting _____ 106-108
 Tyre markings _____ 7
 Tyre pressure / _____ 3, 9, 108, 123
 inflation pressure
 Tyre repairs _____ 119
 Tyre Sealant _____ 73
 Tyre service life _____ 121
 Tyre width _____ 9, 26-67, 68-71, 80-90, 105
- U** Under-inflation _____ 112, 115
 Units of measurements _____ 9
- V** V-rated tyres _____ 8, 107, 112, 113, 114
 Valve caps _____ 108
 Valve support _____ 108
 Van tyres _____ 74-91
 Vibrations _____ 115
- W** W-rated tyres _____ 8, 107, 112, 113, 114
 Wheel camber _____ 114
 Wheel caps / trim rings _____ 108
 Wheel disc _____ 101
 Wheels / rims _____ 101-104, 105, 107
 Winter tyres _____ 7, 17-21, 77, 105f., 122
- X** XL (Extra Load) _____ 7, 114
- Y** Y-rated tyres _____ 8, 107, 112, 113, 114
- Z** ZR-rated tyres* _____ 8, 112, 114

* Obsolete tyre designation,
 production until Nov., 2014.

D	Continental Reifen Deutschland GmbH Head Office:	Büttnerstraße 25 30165 Hannover P.O.B. 169 30001 Hannover	Telephone: ++49-511-9 38-01 Telefax: ++49-511-938-81770
A	Semperit Reifen Ges. m. b. H. Marketing + Vertrieb Österreich	Triester Strasse 14 2351 Wiener Neudorf	Telephone: ++43-22 36-40 40-0 Telefax: ++43-22 36-40 40-40 01
B	Continental Benelux S. A	Excelsiorlaan 61 1930 Zaventem	Telephone: ++32-2710 22 11 Telefax: ++32-2710 22 90
CH	Continental Suisse SA	Lerzenstrasse 19A 8953 Dietikon	Telephone: ++41-44 / 7 45 56 00
CZ	Continental Barum sr. o.	76531 Otrokovice Objizdne 1628	Telephone: ++420 577 511 111
DK	Continental Dæk Danmark A / S	Banemarksvej 50 E, 1 2605 Brøndby	Telephone: ++45-43 23 04 00 Telefax: ++45-43 23 04 01
E	Continental Tires España, S. A.	Avda Castilla 1 Edificio 1 Planta 2 28830 San Fernando de Henares (Madrid)	Telephone: ++34-91-660 36 57 Telefax: ++34-91-675 68 22
F	Continental France SNC Division Commerce	Lieudit le Bac à l'aumône 60605 Compiègne	Telephone: ++33-3-44 40 71 11 Telefax: ++33-3-44 40 74 89
GB	Continental Tyre Group Ltd.	191-195 High Street Yiewsley Middlesex, UB7 7QP	Telephone: ++44-1895 425900 Telefax: ++44-1895 425908
H	Continental Hungaria Kft.	Távíró Köz 2-4 2040 Budaörs	Telephone: ++36-23-33 59 01 Telefax: ++36-23-33 54 63
I	Continental Italia S. p. A.	Via Pietro Rondoni 1 20146 Milano	Telephone: ++39-02-42 4101 Telefax: ++39-02-42 4102 00
N	Continental Dekk Norge A / S	Breivollveien 31 667 Oslo	Telephone: ++47-23 06 80 00 Telefax: ++47-23068001
NL	Continental Banden Groep B. V.	Nijverheidsweg 50 3771 ME Barneveld	Telephone: ++31-3-42 49 72 00 Telefax: ++31-3-42 49 72 91
P	Continental Pneus S. A.	4764-603 Lousado Apartado 5029 Rua Adelino Leitao 330	Telephone: ++351-252-49 92 34 Telefax: ++351-252-49 36 23
PL	Continental Opony Polska Sp. zo. o.	Al. Krakowska 2 a 02284 Warszawa	Telephone: ++48-22-5 7713 00 Telefax: ++48-22-5 7713 01
S	Continental Däck Sverige AB	Första Langgatan 30 40032 Göteborg	Telephone: ++46-31-7 75 80 00 Telefax: ++46-31-24 68 50
SF	Continental Rengas Oy	PL 2 Hevosenkenta 3 02661 Espoo	Telephone: ++358-9-329 900 Telefax: ++358-9-32990 400

Technical Data

Passenger car tyres / 4x4 tyres

- 1) Instead of J-rims the same size JK- and JJ-rims may be used.
- 2) Winter tyres can be max. 1 % greater in outer diameter than standard on-road tread patterns.
- 3) According to DIN 70020 at 37 mph (60 km/h).
- 4) Instead of B-rims, J- and JK-rims may also be used.
- 5) The respective B-rims are permitted.
- *) ZR tyres have no operational code. The LI given for these tyres is only an approx. figure. Ask Continental Customer Services for the actual speed and load capacity.

Van tyres

- 6) Load Index single / twin fitment and Speed Index.
- 7) Dual spacing for twin tyre fitments: See Technical Data Book for Truck Tyres.
- 8) Standard = on road tread pattern, Special = M + S or off road tread pattern.
- 9) S = Single, T = Twin fitment, FA = front axle, RA = rear axle.

For tyre pressures see "Operating instructions", [page 108ff.](#)